


PROFESSIONAL TRANSDUCERS

THE HEART OF YOUR SOUND

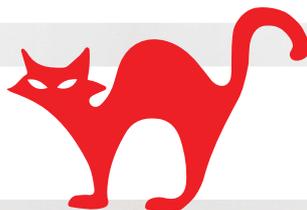

T1

®

2024 ISSUE

OUR MISSION

At REDCATT, we believe in delivering exceptional value to our customers.

We understand that investing in a quality speaker system can be a significant expense, which is why we strive to offer products that provide a great balance between cost and performance.

Our speakers are designed to deliver exceptional sound quality and longevity, while remaining affordable and accessible to a wide range of customers.

We use only the highest quality materials and cutting-edge technology to produce speakers that offer a superior listening experience, without breaking the bank.

With our products, you can enjoy the benefits of a high-end speaker system, without the high-end price tag.



INNOVATION

Design

Our team at REDCATT has a wealth of experience in designing and producing top-notch loudspeakers.

With years of expertise in audio engineering and a passion for creating immersive sound experiences, our team is skilled at crafting speakers that deliver unparalleled quality, longevity, and sound.

We use only the highest quality materials and cutting-edge technology to create speakers that are built to last and deliver crystal-clear sound in your audio system.

Whether you're design audio system for a music lover, movie buff, club animal, or audiophile, our team has the knowledge and expertise to create a speaker that will exceed your expectations and enhance your listening experience of your customers.

We use modern design tools to create the best loudspeakers by employing advanced software for 3D modeling and simulation, allowing us to optimize every aspect of the speaker's design for maximum performance.

These tools enable us to fine-tune the acoustics, materials, and structural integrity, resulting in a speaker that delivers exceptional sound quality and durability.

Our use of modern design tools ensures that our loudspeakers meet the highest standards of performance and reliability.

QUALITY

Quality assurance

At REDCATT, we take quality control very seriously.

Each and every one of our products goes through a rigorous testing process to ensure that they meet our high standards for quality and performance.

From the materials we use to the design of our speakers, every aspect of our product is scrutinized to ensure that it delivers exceptional sound quality and longevity.

Our team of experts meticulously tests our products to identify any potential issues and correct them before they ever reach our customers.

We are committed to delivering products that exceed expectations, and our rigorous quality control measures ensure that every speaker that leaves our facility is of the highest quality possible.



2"**22NFR****Full-range****Key features:**

- FULL-RANGE FREQUENCY RESPONSE
- OPTIMIZED FREQUENCY RESPONSE
- USAGE IN HOME HI-FI, TV BARS, COLUMNS SYSTEMS AND ARRAYS

Design notes:

This small, but mighty, driver was designed for application where full-range frequency response from one unit is required.

Magnetic circuit is designed with neodymium slug and u-cup steel. This circuit delivers very good level of performance in compact and a cost effective way.

Very lightweight cone with attached rubber surround ensures good piston behavior across wide frequency range.

REDCATT has designed new basket for this application. The basket features front flange all around, which improves the mechanical rigidity of the chassis. The driver can be either front or back mounted onto the baffle.

Due to its compact size, yet excellent acoustical performance, the 22NFR can be used in variety of applications, from column speakers, multi-way systems, portable products, etc.

Specifications:**General specs**

Nominal Diameter: 2"
Rated Impedance: 8 ohm

Power handling

AES Power: 20 watts
Program Power: 40 watts
Peak Power: 80 watts

Voice Coil

Diameter: 1 in.
Winding wire: CCAW
Former: kapton
Winding height: 5.5 mm

T/S Parameters

Resonant frequency: 255 Hz
Re: 5.6 ohm
Qes: 0.98
Qms: 6.46
Qts: 0.85
Vas: 0.08 liters
Sd: 15.9 cm²
Sensitivity: 85 dB
Mms: 1.67 grams
Bl: 3.91
Le: 0.06 mH

Design details

Surround Material: Fabric
Cone material: Paper
Spider: Conex
Plate thickness: 4 mm
Peak to peak linear cone displacement: 3.6 mm
Overall diameter: 60.5 mm
Bolt circle diameter: 64 mm
Baffle cutout dia.: 52 mm
Number of mounting holes: 4
Depth (flange to rear): 35.5 mm
Net weight: 0.12kg


Ordering codes:

22NFR-X8 ohm-462A


Recone kits:

RC22NFRX-462A

In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

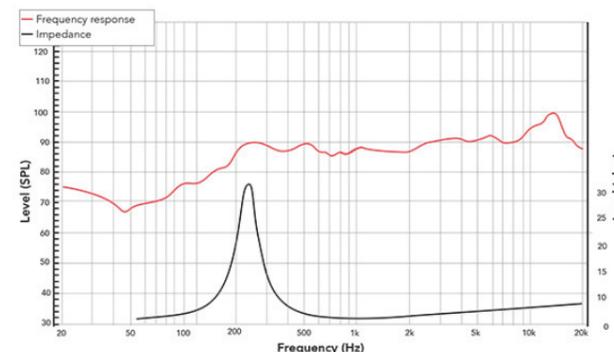Frequency response & Impedance

Frequency response measured on IAC baffle

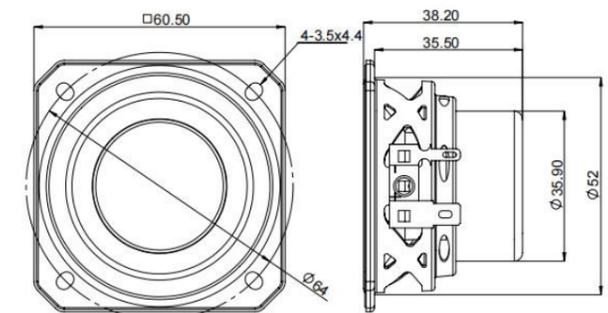2D drawing

2" | 21NFR

Full-range



Key features:

- COMPACT, FULL-RANGE DESIGN
- HIGHLY EFFICIENT MAGNETIC STRUCTURE
- HIGH POWER HANDLING CAPABILITY

Design notes:

Introducing the 21NFR - a small driver with a mighty punch! This gem was developed to deliver a full range of frequencies, from rich bass to crystal-clear highs, making it the perfect choice for portable products, bookshelf speakers, and array applications in columns.

What sets the 21NFR apart is its full-range behavior, eliminating the need for additional tweeters while still achieving excellent

sound quality. Our extensive experience in designing highly efficient transducers shines through in this driver, offering top-notch performance without breaking the bank.

The u-cup style magnetic system is optimized to deliver consistent magnetic flux to the voice coil across the entire operational range, ensuring a powerful and consistent audio experience. Plus, with a lightweight yet robust cone attached to our specially


crafted rubber blend surround, the 21NFR is designed to handle low frequencies with ease while also excelling as a high-frequency device.

Get ready to experience the power and versatility of the 21NFR - where small size meets massive performance.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 2"	Resonant frequency: 157 Hz	Surround Material: Rubber	21NFR-X16 ohm-393D
Rated Impedance: 16 ohm	Re: 10.2 ohm	Cone material: Paper	
	Qes: 0.82	Spider: Nomex	
Power handling	Qms: 3.8	Plate thickness: 4 mm	
AES Power: 10 watts	Qts: 0.68	Peak to peak linear cone displacement: 8.2 mm	Recone kits:
Program Power: 20 watts	Vas: 0.25 liters	Overall diameter: 57.3 mm	RC21NFRX-393D
Peak Power: 40 watts	Sd: 16.62 cm ²	Bolt circle diameter: 45.45 mm	
Voice Coil	Sensitivity: 85 dB	Baffle cutout dia.: 50.5 mm	In many cases REDCATT
Diameter: 0.8 in.	Mms: 1.59 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Winding wire: CCAW	Bl: 4.4	Depth (flange to rear): 34.5 mm	16 ohms versions. Indicate
Former: kapton	Le: 0.1 mH	Net weight: 119g	what impedance do you need
Winding height: 6.4 mm			in your request.

Frequency response & Impedance

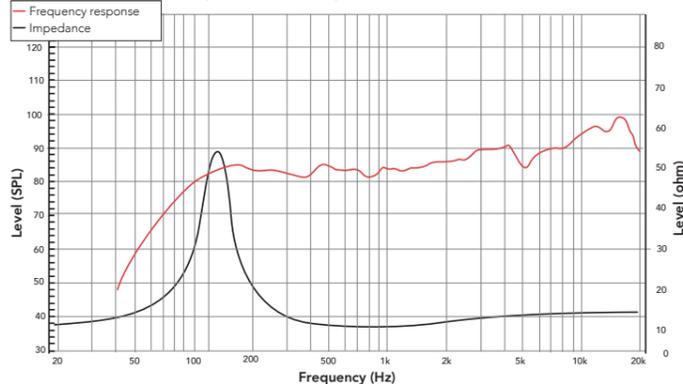

Frequency response measured on IAC baffle

2D drawing

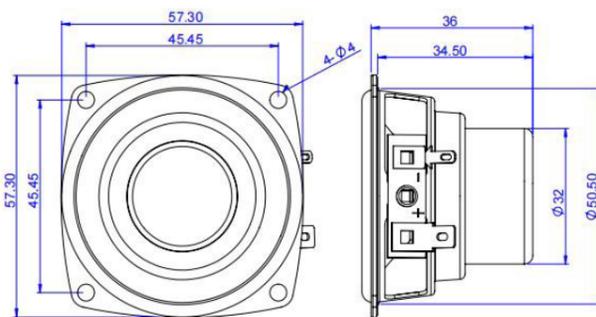

2" | 20NFR

Full-range



Key features:

- VERY COMPACT AND AFFORDABLE DESIGN
- LIGHTWEIGHT CONE ASSEMBLY

Design notes:

20NFR was designed for applications where true full-range frequency response from one driver is required. From low to up to 17kHz, this driver truly delivers that. With additional DSP, the driver can be used from about 60Hz up.

We have developed very lightweight foam surround material. This material is our preference anywhere where we are designing larger cone excursions, yet lightweight piston is required. It delivers


excellent acoustical properties without the mass penalties.

The magnetic circuit was designed around neodymium slug magnets, with u-cup style steel. The circuit delivers very high performance in very small and lightweight form factor.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 2"	Resonant frequency: 185 Hz	Surround Material: Foam	20NFR-X4 ohm-345A
Rated Impedance: 4 ohm	Re: 3.6 ohm	Cone material: Paper	
	Qes: 0.54	Spider: Nomex	
Power handling	Qms: 10.3	Plate thickness: 3 mm	
AES Power: 10 watts	Qts: 0.52	Peak to peak linear cone displacement: 6 mm	Recone kits:
Program Power: 20 watts	Vas: 0.09 liters	Overall diameter: 48 mm	RC20NFRX-345A
Peak Power: 40 watts	Sd: 11.34 cm ²	Bolt circle diameter: 56 mm	
Voice Coil	Sensitivity: 83 dB	Baffle cutout dia.: 42.9 mm	In many cases REDCATT
Diameter: 0.75 in.	Mms: 1.37 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Winding wire: Aluminum	Bl: 3.24	Depth (flange to rear): 29 mm	16 ohms versions. Indicate
Former: kapton	Le: 0.08 mH	Net weight: 0.08kg	what impedance do you need
Winding height: 8.5 mm			in your request.

Frequency response & Impedance

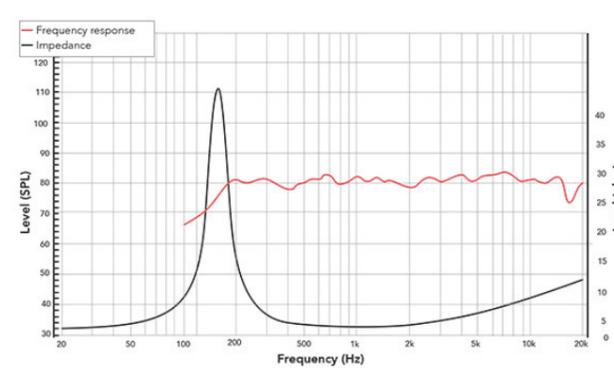

Frequency response measured on IAC baffle

2D drawing

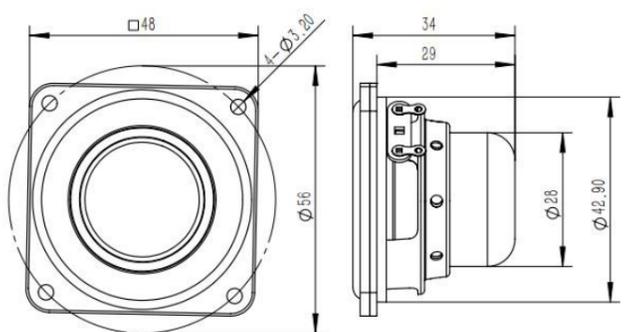

3" | 25NFR

Full-range



Key features:

- FULL-RANGE FREQUENCY RESPONSE
- A VERY SMALL FORM FACTOR
- OPTIMIZED FREQUENCY RESPONSE

Design notes:

25NFR was designed around neodymium ring magnet. The magnetic structure delivers very high level of magnetic force, while generating minimum amount of modulation distortion.

The lightweight, yet strong, paper cone with attached rubber surround was designed and optimized to deliver the highest level of performance in full-range applications.


This speaker finds its best application in columns or multi-way Hi-Fi products. Due to its excellent HF response, further usage of HF units is not required.

The small form-factor allows this product to be used in space limited applications or portable products.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 3"	Resonant frequency: 123 Hz	Surround Material: Rubber	25NFR-X8 ohm-279
Rated Impedance: 8 ohm	Re: 7.3 ohm	Cone material: Paper	
	Qes: 0.81	Spider: Nomex	
Power handling	Qms: 5.97	Plate thickness: 3 mm	
AES Power: 20 watts	Qts: 0.71	Peak to peak linear cone displacement: 7.8 mm	
Program Power: 40 watts	Vas: 0.46 liters	Overall diameter: 65 mm	Recone kits: RC25NFRX-279
Peak Power: 80 watts	Sd: 21.2 cm ²	Bolt circle diameter: 73 mm	
Voice Coil	Sensitivity: 83 dB	Baffle cutout dia.: 56 mm	In many cases REDCATT
Diameter: 0.8 in.	Mms: 2.2 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Winding wire: CCAW	Bl: 4	Depth (flange to rear): 37 mm	16 ohms versions. Indicate
Former: kapton	Le: 0.09 mH	Net weight: 0.18kg	what impedance do you need
Winding height: 8.3 mm			in your request.

Frequency response & Impedance

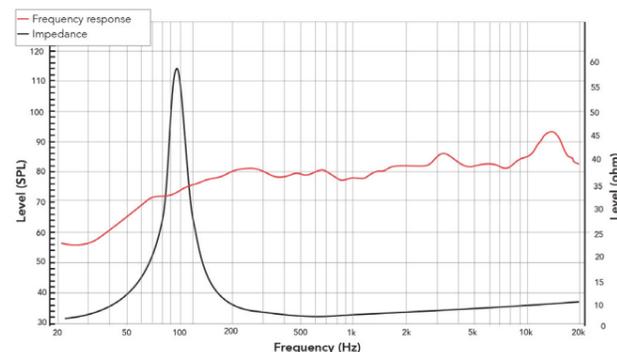

Frequency response measured on IAC baffle

2D drawing

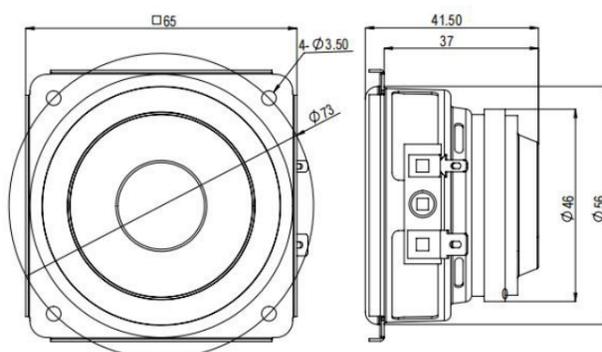

3" | 32NFR

Full-range



Key features:

- FULL-RANGE COVERAGE
- VERY COMPACT DESIGN
- SUITABLE FOR ARRAY, COLUMNS, OR USAGE WITHOUT HF DRIVERS

Design notes:

32NFR delivers incredible . It comes together with other speaker models as the next generation of our full-range drivers. Well balanced frequency response from LF to HF, low harmonic distortion, and on top of that all packed in a lightweight and compact mechanical structure.

The driver was designed around neodymium ring magnet. Magnetic circuit delivers the highest level of performance, with minimum modulation distortion.

The cone and surround were newly designed and optimized specifically for this model. Progressive roll surround further improves the frequency response.


Our newly designed basket with typical REDCATT visual aspects sports front and rear gaskets, thus the driver can be easily mounted on both sides of baffle. Large basket openings minimize turbulence and air noise. Space below spider is also vented. This further improves the tempera-

ture stability of this model. The mounting surface has a flange all around, feature that greatly improves mechanical rigidity.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 3"	Resonant frequency: 118 Hz	Surround Material: Rubber	32NFR-X8 ohm-463A
Rated Impedance: 8 ohm	Re: 5.5 ohm	Cone material: Paper	
	Qes: 0.35	Spider: Nomex	
Power handling	Qms: 3.85	Plate thickness: 4 mm	
AES Power: 30 watts	Qts: 0.32	Peak to peak linear cone displacement: 6.4 mm	Recone kits:
Program Power: 60 watts	Vas: 1.14 liters	Overall diameter: 82.5 mm	RC32NFRX-463A
Peak Power: 120 watts	Sd: 33.18 cm ²	Bolt circle diameter: 84 mm	
Voice Coil	Sensitivity: 91 dB	Baffle cutout dia.: 70.5 mm	In many cases REDCATT
Diameter: 0.75 in.	Mms: 2.4 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Winding wire: CCAW	Bl: 5.35	Depth (flange to rear): 45 mm	16 ohms versions. Indicate
Former: kapton	Le: 0.2 mH	Net weight: 0.24kg	what impedance do you need
Winding height: 6.4 mm			in your request.

Frequency response & Impedance

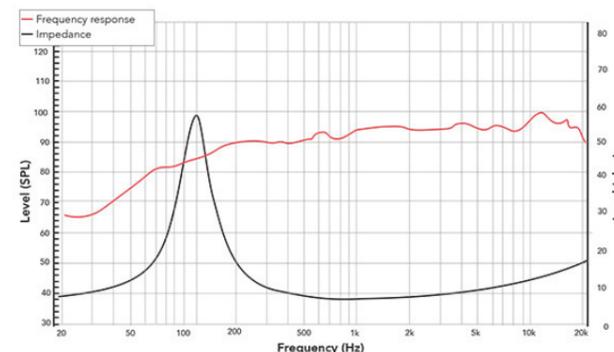

Frequency response measured on IAC baffle

2D drawing

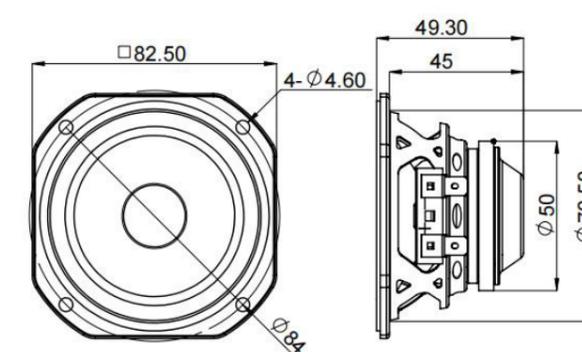

3" | 31NFR

Full-range



Key features:

- EXTENDED FREQUENCY RESPONSE
- HARD ANODIZED ALUMINUM CONE
- USAGE IN HI-FI, COLUMNS, OUTDOOR AND PORTABLE PRODUCTS

Design notes:

The 31NFR is a high efficiency, (84dB 1watt / 1 meter) 3-inch full range speaker with very linear frequency response characteristics and high power handling capability. The 31NFR uses a lightweight anodized aluminum cone assembly along with a NBR single roll geometry surround. The combination provides high efficiency, extended high frequency response and sustained output under variety of conditions, while generating low harmonic distortion


over the working range of this speaker. over the t-pole.

Magnetic circuit design REDCATT engineers have developed neodymium based magnetic circuit with small form factor, high integrity magnetic flux gap and low distortion characteristic. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability. Copper demodulation cup is assembled

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 3"	Resonant frequency: 115 Hz	Surround Material: Rubber	31NFR-X8 ohm-229
Rated Impedance: 8 ohm	Re: 6.3 ohm	Cone material: Aluminum	
Power handling	Qes: 0.94	Spider: Nomex	
AES Power: 30 watts	Qms: 15.1	Plate thickness: 4 mm	
Program Power: 60 watts	Qts: 0.88	Peak to peak linear cone displacement: 5.8 mm	Recone kits:
Peak Power: 120 watts	Vas: 0.85 liters	Overall diameter: 78.7 mm	RC31NFRX-229
Voice Coil	Sd: 28.3 cm ²	Bolt circle diameter: 84 mm	
Diameter: 1 in.	Sensitivity: 84 dB	Baffle cutout dia.: 71.5 mm	In many cases REDCATT
Winding wire: Aluminum	Mms: 2.5 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Former: Kapton	Bl: 3.5	Depth (flange to rear): 45.3 mm	16 ohms versions. Indicate
Winding height: 7.4 mm	Le: 0.09 mH	Net weight: 0.18kg	what impedance do you need
			in your request.

Frequency response & Impedance

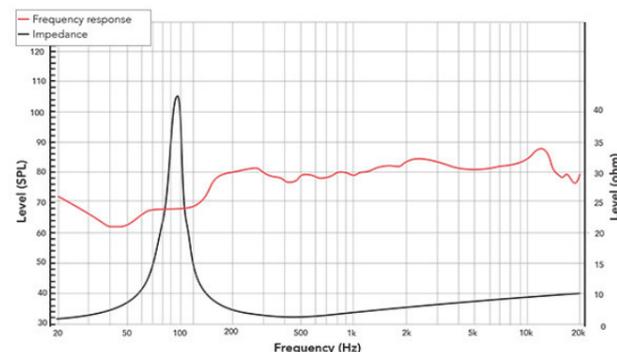

Frequency response measured on IAC baffle

2D drawing

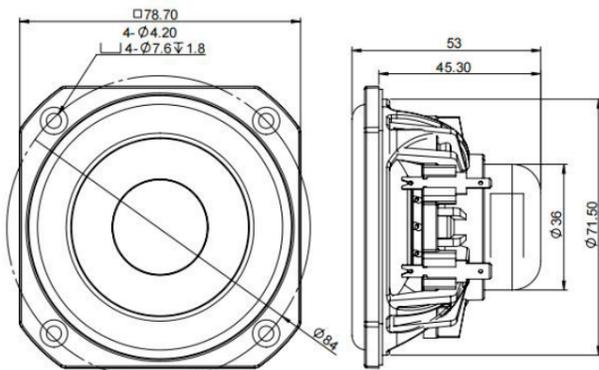

3" | 30FF

Full-range



Key features:

- FULL-RANGE FREQUENCY RESPONSE
- AFFORDABLE SMALL DRIVER THAT FITS ALL BUDGETS
- VERY POPULAR IN ARRAY AND COLUMN APPLICATIONS

Design notes:

The 30FF is a high efficiency, (85dB 1watt / 1 meter) 3-inch full range speaker with linear frequency response characteristics and high power handling capability while generating low harmonic distortion artifacts. The 30FF uses a lightweight exponential pressed cone assembly along with a NBR single roll geometry surround. The combination provides remarkable strength, high efficiency and sustained output under extreme conditions.


Power Handling At the core of the 30FF is it, Åôs voice coil technology featuring a Kapton former material capable of withstanding peak temperatures in excess of 240C, well beyond the thermal requirements of modern professional audio systems and providing optimal structural strength and thermal characteristics. Former strength provides the ideal transfer of power between the voice coil and the cone assembly and assists in reducing

distortion artifacts. By combining this material with state of the art adhesives and our winding voice coil technology, the 30FF delivers very high performance. The best application is in column speakers, two-way and multi-way audio systems. Due to its good HF extension, the HF units are not required.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 3"	Resonant frequency: 119 Hz	Surround Material: Rubber	30FF-X8 ohm-264B
Rated Impedance: 8 ohm	Re: 5.6 ohm	Cone material: Paper	
Power handling	Qes: 0.98	Spider: Nomex	
AES Power: 20 watts	Qms: 3.87	Plate thickness: 4 mm	
Program Power: 40 watts	Qts: 0.78	Peak to peak linear cone displacement: 7.4 mm	Recone kits:
Peak Power: 80 watts	Vas: 0.81 liters	Overall diameter: 79 mm	RC30FFX-264B
Voice Coil	Sd: 28.27 cm ²	Bolt circle diameter: 86 mm	
Diameter: 0.75 in.	Sensitivity: 85 dB	Baffle cutout dia.: 77 mm	In many cases REDCATT
Winding wire: CCAW	Mms: 2.4 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Former: Kapton	Bl: 3.25	Depth (flange to rear): 46.9 mm	16 ohms versions. Indicate
Winding height: 6.5 mm	Le: 0.04 mH	Net weight: 0.47kg	what impedance do you need
			in your request.

Frequency response & Impedance

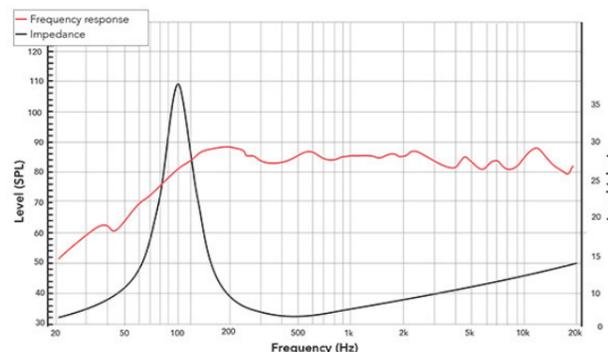

Frequency response measured on IAC baffle

2D drawing

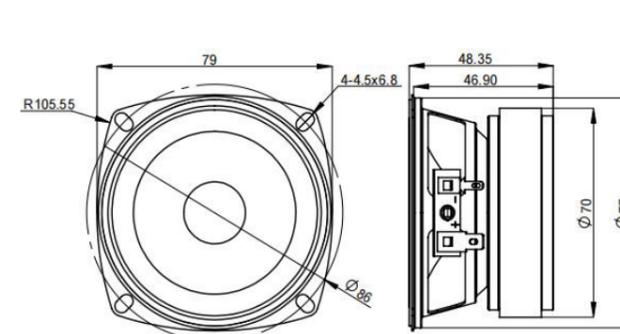

4" | Twiggy35

Woofer



Key features:

- REMARKABLY SLIM 10.15MM MOUNTING DEPTH
- 3.8MM CONE EXCURSION
- POWER HANDLING CAPACITY OF 20 WATTS

Design notes:


Introducing the 35Twiggy mid-woofer, designed for ultra-thin applications. With its remarkably slim 10.15mm mounting depth and maximum 3.8mm cone excursion, this driver delivers exceptional performance. The 3-layer honeycomb cone ensures optimal functionality across all ranges. Boasting a power handling capacity of 20 watts, the 35Twiggy is a standout in our Twiggy product line. Designed with our patented technology, Twiggy drivers offer

unparalleled design flexibility for unique product shapes and space-constrained environments. Experience world-class audio innovation with the 35Twiggy.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 4"	Resonant frequency: 145 Hz	Surround Material: Rubber	Twiggy35-X8 ohm-535D
Rated Impedance: 8 ohm	Re: 7.3 ohm	Cone material: Paper Honey-	
	Qes: 1.75	Spider: Nomex	
Power handling	Qms: 4.38	Plate thickness: 3 mm	
AES Power: 10 watts	Qts: 1.25	Peak to peak linear cone displacement: 3.8 mm	Recone kits:
Program Power: 20 watts	Vas: 0.6 liters	Overall diameter: 90*90 mm	RCTwiggy35X-535D
Peak Power: 40 watts	Sd: 36.32 cm ²	Bolt circle diameter: 94 mm	
Voice Coil	Sensitivity: 83 dB	Baffle cutout dia.: 77 mm	In many cases REDCATT
Diameter: 1.3 in.	Mms: 3.7 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Winding wire: CCAW	Bl: 3.7	Depth (flange to rear): 10.15 mm	16 ohms versions. Indicate
Former: Aluminum	Le: 0.19 mH	Net weight: 95g	what impedance do you need
Winding height: 3 mm			in your request.

Frequency response & Impedance

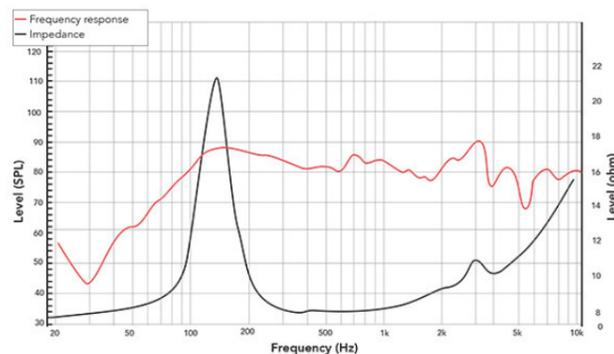

Frequency response measured on IAC baffle

2D drawing

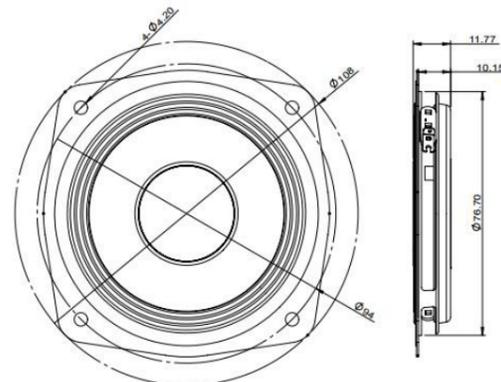

4" | 35FR

Full-range



Key features:

- MIGHTY DRIVER DELIVERING THE HIGHEST PERFORMANCE
- VERY GOOD LF EXTENSION, LARGE PEAK TO PEAK CONE DISPLACEMENT

Design notes:

35FR was developed as full-range ferrite magnet driver. It has an excellent HF extension and provides extended level of LF performance.

The driver was designed for usage in sealed speaker systems. It could be in column speakers, 2-way or 1-way speakers. It is also possible design a speaker system with a passive radiator to further extend the low frequency range.

Voice coil is wound with copper

hi temperature wire directly on the aluminum former, ensuring good power handling and high temperature stability.


This driver brings good balance between performance and cost.

Depending on intended usage, we can deliver the driver either as 4 or 8 ohm version.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 4"	Resonant frequency: 67 Hz	Surround Material: Rubber	35FR-X4 ohm-155
Rated Impedance: 4 ohm	Re: 3.5 ohm	Cone material: Paper	
	Qes: 0.37	Spider: Nomex	
Power handling	Qms: 4.35	Plate thickness: 8 mm	
AES Power: 25 watts	Qts: 0.34	Peak to peak linear cone displacement: 12.2 mm	Recone kits:
Program Power: 50 watts	Vas: 1.6 liters	Overall diameter: 93 mm	RC35FRX-155
Peak Power: 100 watts	Sd: 38.5 cm ²	Bolt circle diameter: 101 mm	
Voice Coil	Sensitivity: 84 dB	Baffle cutout dia.: 85 mm	In many cases REDCATT
Diameter: 1 in.	Mms: 7.5 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Winding wire: Copper	Bl: 5.46	Depth (flange to rear): 51 mm	16 ohms versions. Indicate
Former: Aluminum	Le: 0.14 mH	Net weight: 0.85kg	what impedance do you need
Winding height: 6.9 mm			in your request.

Frequency response & Impedance

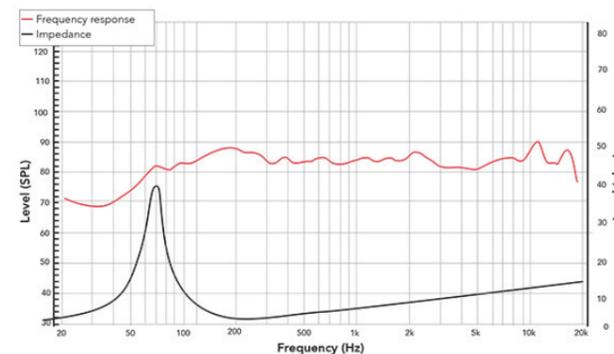

Frequency response measured on IAC baffle

2D drawing

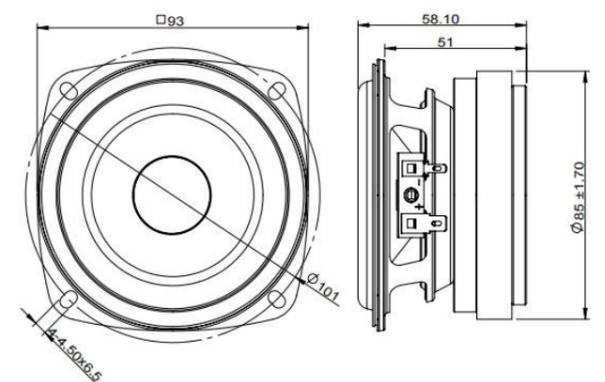

4"

35FR

Full-range



REDCATT
**Key features:**

- EXTENDED FREQUENCY RESPONSE
- BL SYMMETRY
- FEM OPTIMIZED PAPER CONE AND SURROUND

Design notes:

35FR was developed as full-range ferrite magnet driver. It has an excellent HF extension and provides good level of LF performance.

The driver was designed for usage in sealed speaker systems. It could be in column speakers, 2-way or 1-way speakers. It is also possible design a speaker system with a passive radiator to further extend the low frequency range.

Voice coil is wound with CCAW

hi temperature wire directly on the Kapton former, ensuring good power handling and high temperature stability.

This driver brings good balance between performance and cost.

Depending on intended usage, we can deliver the driver either as 4, 8 or 16 ohm version.

Specifications:**General specs**

Nominal Diameter: 4"

Rated Impedance: 8 ohm

Power handling

AES Power: 20 watts

Program Power: 40 watts

Peak Power: 80 watts

Voice Coil

Diameter: 1 in.

Winding wire: CCAW

Former: kapton

Winding height: 8.7 mm

T/S Parameters

Resonant frequency: 128 Hz

Re: 6.3 ohm

Qes: 0.68

Qms: 7.76

Qts: 0.63

Vas: 1.14 liters

Sd: 40.7 cm²

Sensitivity: 89 dB

Mms: 3.1 grams

Bl: 4.8

Le: 0.25 mH

Design details

Surround Material: Fabric

Cone material: Paper

Spider: Nomex

Plate thickness: 4 mm

Peak to peak linear cone displacement: 8.6 mm

Overall diameter: 93 mm

Bolt circle diameter: 101 mm

Baffle cutout dia.: 85.5 mm

Number of mounting holes: 4

Depth (flange to rear): 49 mm

Net weight: 0.57kg


Ordering codes:

35FR-X8 ohm-406B


Recone kits:

RC35FRX-406B

In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

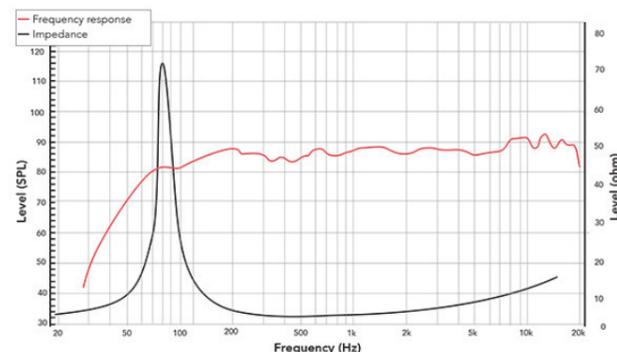Frequency response & Impedance

Frequency response measured on IAC baffle

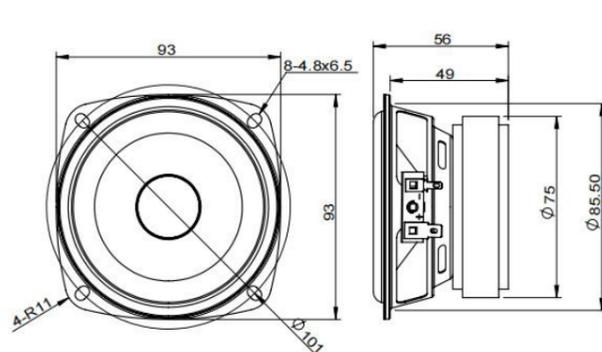2D drawing

info@redcatt.net

www.redcatt.net

4"

4FR

Full-range



REDCATT
**Key features:**

- 4FR MID-WOOFER WAS DESIGNED WITH OUTDOOR APPLICATIONS IN MIND. ALL
- EXTENDED LF FREQUENCY RESPONSE
- 2-WAY SPEAKER SYSTEMS

Design notes:

4FR Mid-woofer was designed with outdoor applications in mind. All speaker parts are coated to provide good protection against weather elements. The surround, cone and dust cap are produced with UV stabilizers. Our state of the art glue application and glue selection ensures the glue joints are waterproof.

Magnet circuit is designed around sizable ferrite magnet. Consistent and wide BL field add to the well balanced perfor-

mance of this driver.

Polypropylene cone and dust-cap are lightweight solution and deliver the highest levels of performance. Large surround roll extends the peak to peak cone displacement and greatly improves the LF performance.

The best application is in 2-way or multi-way speaker systems that can be designed for indoor or outdoor usage in Hi-Fi or professional products.

Specifications:**General specs**

Nominal Diameter: 4"

Rated Impedance: 4 ohm

Power handling

AES Power: 30 watts

Program Power: 60 watts

Peak Power: 120 watts

Voice Coil

Diameter: 1 in.

Winding wire: Copper

Former: Aluminum

Winding height: 4.3 mm

T/S Parameters

Resonant frequency: 80 Hz

Re: 3.3 ohm

Qes: 0.58

Qms: 4.24

Qts: 0.51

Vas: 1.96 liters

Sd: 50.3 cm²

Sensitivity: 85 dB

Mms: 7.3 grams

Bl: 4.58

Le: 0.29 mH

Design details

Surround Material: Rubber

Cone material: PP

Spider: Nomex

Plate thickness: 5 mm

Peak to peak linear cone displacement: 6.6 mm

Overall diameter: 116 mm

Bolt circle diameter: 109 mm

Baffle cutout dia.: 94.5 mm

Number of mounting holes: 4

Depth (flange to rear): 55.9 mm

Net weight: 0.78kg


Ordering codes:

4FR-X4 ohm-385


Recone kits:

RC4FRX-385

In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

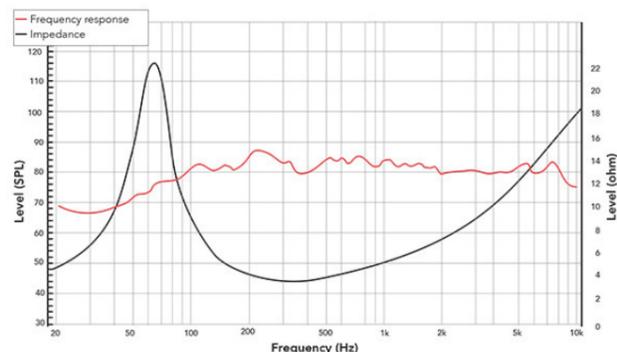Frequency response & Impedance

Frequency response measured on IAC baffle

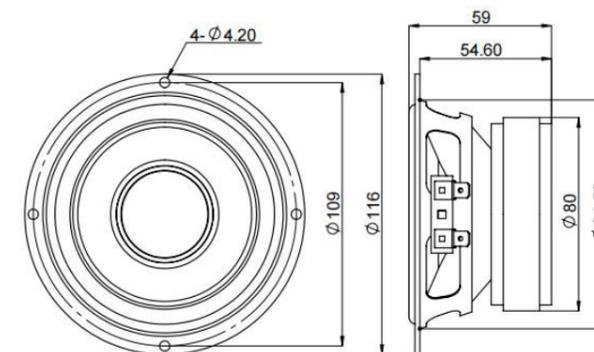2D drawing

info@redcatt.net

www.redcatt.net

4"

4FR

Full-range


REDCATT
**Key features:**

- OPTIMIZED FULL-RANGE PERFORMANCE
- GOOD LOW FREQUENCY BEHAVIOR
- AFFORDABLE DESIGN

Design notes:

4FR ferrite based mid-woofer was developed for applications where small size mid-woofer is required. Low resonant frequency and large cone excursion delivers sizeable amounts of low frequencies. Yet, this driver delivers very good performance in mid-high frequency range.


Our engineers have chosen light-weight, yet strong, paper cone with rubber surround. Cone optimized shape brings remarkable strength of the piston and greatly

improves harmonic distortion artifacts.


Overall this model delivers very good performance and is well balanced between performance - cost.

Specifications:

General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 4"	Resonant frequency: 79 Hz	Surround Material: Rubber	4FR-X4 ohm-322
Rated Impedance: 4 ohm	Re: 3.5 ohm	Cone material: Paper	
	Qes: 0.61	Spider: Nomex	
Power handling	Qms: 3.47	Plate thickness: 5 mm	
AES Power: 30 watts	Qts: 0.52	Peak to peak linear cone displacement: 6.6 mm	
Program Power: 60 watts	Vas: 1.8 liters	Overall diameter: 105.5 mm	Recone kits:
Peak Power: 120 watts	Sd: 50.3 cm ²	Bolt circle diameter: 106 mm	RC4FRX-322
	Sensitivity: 84 dB	Baffle cutout dia.: 93.6 mm	
Voice Coil	Mms: 7.9 grams	Number of mounting holes: 4	In many cases REDCATT
Diameter: 1 in.	Bl: 4.8	Depth (flange to rear): 56 mm	produces 4 ohms, 8 ohms and
Winding wire: Copper	Le: 0.09 mH	Net weight: 0.77kg	16 ohms versions. Indicate
Former: Aluminum			what impedance do you need
Winding height: 10.6 mm			in your request.

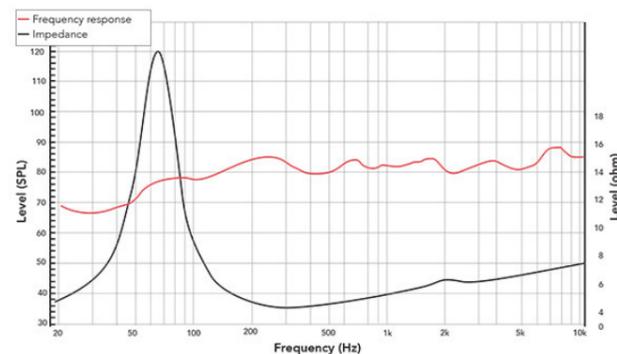Frequency response & Impedance

Frequency response measured on IAC baffle

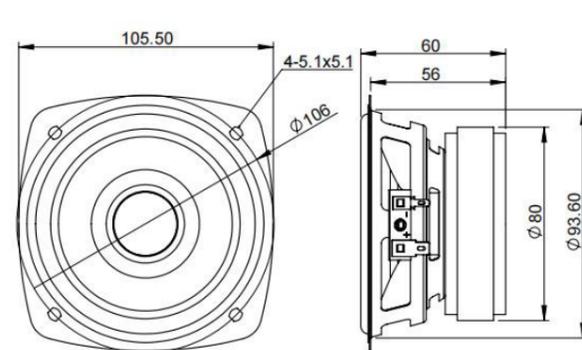2D drawing

4"

41NFR

Full-range


REDCATT
**Key features:**

- FULL-RANGE FREQUENCY RESPONSE
- EXTENDED LF RESPONSE
- FRONT OR REAR MOUNTING

Design notes:

41NFR was introduced as part of our new range of smaller transducers. The model is focusing on improvements in frequency response, both in LF and Mid-Freq. Powerful neodymium ring based magnetic structure delivers the highest levels of moving force onto the voice coil with minimum distortion artifacts.

The cone and rubber surround were further FEM modeled and deliver incredible performance.


41NFR was designed for column speakers, micro line-array systems and two-way audio systems. Due to its good performance in high frequencies, this driver can be used without HF unit, which opens new opportunities for the system engineers to design compact, yet good sounding products.

Our newly developed basket with typical REDCATT shapes, utilizes tall front EVA gasket and 1mm rear gasket. The


driver can be thus mounted from both sides of the baffle.

Specifications:

General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 4"	Resonant frequency: 98 Hz	Surround Material: Rubber	41NFR-X16 ohm-464A
Rated Impedance: 16 ohm	Re: 12.2 ohm	Cone material: Paper	
	Qes: 0.4	Spider: Nomex	
Power handling	Qms: 5.05	Plate thickness: 5 mm	
AES Power: 40 watts	Qts: 0.37	Peak to peak linear cone displacement: 10.2 mm	Recone kits:
Program Power: 80 watts	Vas: 2.1 liters	Overall diameter: 104.5 mm	RC41NFRX-464A
Peak Power: 160 watts	Sd: 56.75 cm ²	Bolt circle diameter: 106.3 mm	
	Sensitivity: 90 dB	Baffle cutout dia.: 92.2 mm	In many cases REDCATT
Voice Coil	Mms: 5.4 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Diameter: 1 in.	Bl: 10	Depth (flange to rear): 51.2 mm	16 ohms versions. Indicate
Winding wire: Copper	Le: 0.58 mH	Net weight: 0.54kg	what impedance do you need
Former: kapton			in your request.
Winding height: 11.3 mm			

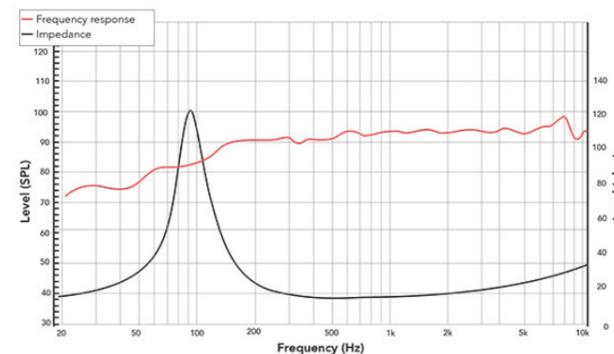Frequency response & Impedance

Frequency response measured on IAC baffle

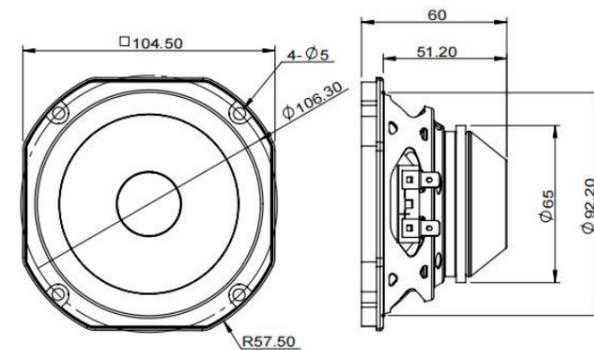2D drawing

4"

41FR

Full-range



REDCATT
**Key features:**

- VERY GOOD PERFORMANCE AT AFFORDABLE PRICE
- EXCELLENT HF EXTENSION
- ARRAY APPLICATIONS, 2-WAY SYSTEMS, CAN BE USED WITHOUT HF UNIT

Design notes:

41FR is ferrite based mid-woofer, developed for applications where small size mid-woofer is required. This version was developed with extended HF response and in some cases could be used as full-range driver. Yet, this driver delivers very good performance low frequency range as well.

Our engineers have chosen light-weight, yet strong, paper cone with rubber surround. Cone optimized shape brings remarkable strength of the piston and greatly

improves harmonic distortion artifacts.

Overall this model delivers very good performance and is well balanced between performance - cost.

Specifications:


General specs	T/S Parameters
Nominal Diameter: 4"	Resonant frequency: 134 Hz
Rated Impedance: 8 ohm	Re: 5.6 ohm
	Qes: 0.81
Power handling	Qms: 10.6
AES Power: 20 watts	Qts: 0.75
Program Power: 40 watts	Vas: 1.3 liters
Peak Power: 80 watts	Sd: 50.3 cm ²
Voice Coil	Sensitivity: 89 dB
Diameter: 1 in.	Mms: 3.8 grams
Winding wire: CCAW	Bl: 4.78
Former: kapton	Le: 0.09 mH
Winding height: 7.2 mm	

Design details
Surround Material: Fabric
Cone material: Paper
Spider: Nomex
Plate thickness: 5 mm
Peak to peak linear cone displacement: 7 mm
Overall diameter: 105.5 mm
Bolt circle diameter: 106 mm
Baffle cutout dia.: 93.6 mm
Number of mounting holes: 4
Depth (flange to rear): 55.9 mm
Net weight: 0.78kg


Ordering codes:
41FR-X8 ohm-360B

Recone kits:
RC41FRX-360B

In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

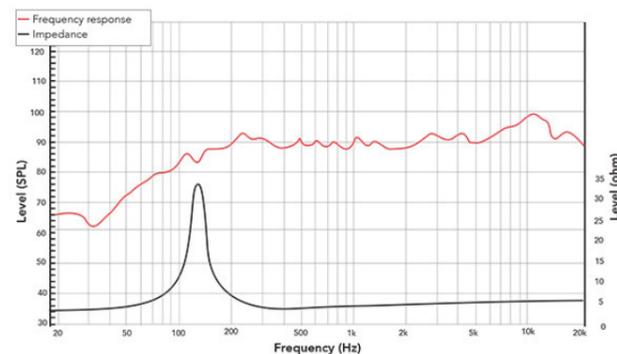Frequency response & Impedance

Frequency response measured on IAC baffle

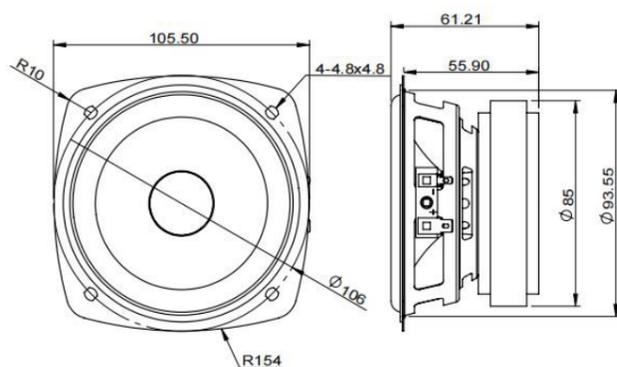2D drawing
info@redcatt.net
www.redcatt.net

4"

40NFR

Full-range



REDCATT
**Key features:**

- FULL-RANGE FREQUENCY RESPONSE
- UNIQUE CONE MATERIAL
- FOR COLUMN SYSTEMS, DESKTOP HIGH PERFORMANCE 2 WAY OR ONE-WAY SPEAKERS, HI-FI

Design notes:

The 40NFR is a very high efficiency, (86dB 1 watt / 1 meter) 4-inch full range speaker with linear frequency response characteristics and high power handling capability while generating low harmonic distortion artifacts. The 40NFR uses a unique exponential cone, made off very lightweight glass-carbon fiber woven fabric, along with a NBR single roll geometry surround. The combination provides remarkable strength, high efficiency and

sustained output under extreme conditions.

Magnetic circuit design
REDCATT engineers have developed neodymium based magnetic circuit, capable of delivering the highest level of performance, providing a consistent, high integrity magnetic flux gap, low distortion characteristic. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability.

The compact size of the magnetic circuit ensures the speaker can fit in tight space of modern audio product designs.

Specifications:


General specs	T/S Parameters
Nominal Diameter: 4"	Resonant frequency: 115 Hz
Rated Impedance: 16 ohm	Re: 12.3 ohm
	Qes: 1.3
Power handling	Qms: 6.2
AES Power: 25 watts	Qts: 1.1
Program Power: 50 watts	Vas: 1.5 liters
Peak Power: 100 watts	Sd: 50.2 cm ²
Voice Coil	Sensitivity: 86 dB
Diameter: 0.75 in.	Mms: 4.4 grams
Winding wire: CCAW	Bl: 5.3
Former: Kapton	Le: 0.2 mH
Winding height: 4.9 mm	

Design details
Surround Material: Rubber
Cone material: Glass Fiber
Spider: Nomex
Plate thickness: 4 mm
Peak to peak linear cone displacement: 5.8 mm
Overall diameter: 103.5 mm
Bolt circle diameter: 115 mm
Baffle cutout dia.: 91 mm
Number of mounting holes: 4
Depth (flange to rear): 50.5 mm
Net weight: 0.2kg


Ordering codes:
40NFR-X16 ohm-223

Recone kits:
RC40NFRX-223

In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

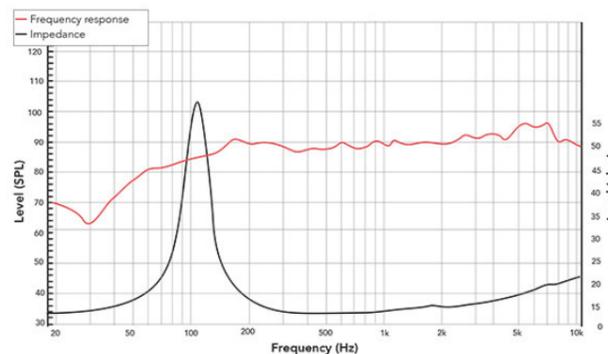Frequency response & Impedance

Frequency response measured on IAC baffle

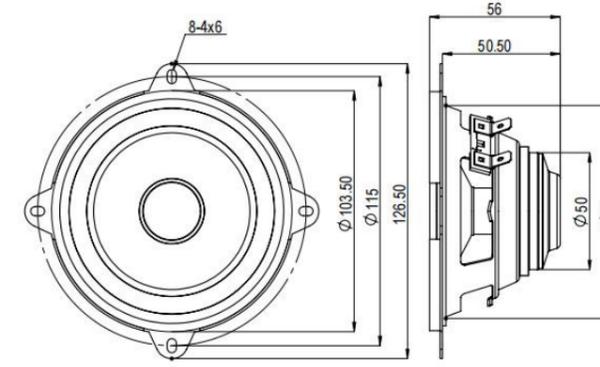2D drawing
info@redcatt.net
www.redcatt.net

5"

5FR

Full-range



REDCATT
**Key features:**

- WIDE RANGE FREQUENCY RESPONSE
- RUBBER SURROUND, CUSTOM PAPER PULP CONE
- DESIGNED FOR HI-FI, STUDIO DESK-TOP, COLUMNS OR OTHER MULTI-WAY SYSTEMS

Design notes:

5FR delivers a good balance of low-mid frequencies. Extended frequency response opens opportunity do design compact audio systems with sizable amounts of low frequencies, yet wit great clarity in mid to high frequency region. The optimized behavior of this driver in the mid-frequency region allows the audio engineers design simplified passive crossovers or DSP without the needs for large equalizations.

The magnetic structure was

designed around large high-grade ferrite magnet. All steel parts are extensively coated to cope with the most demanding environments.


The cone paper pulp and surround were fully developed by REDCATT engineers and address all major break-up modes. The speaker has improved off-axes frequency response.

The newly designed steel basket with front and rear gaskets allow this


mid-woofer to be mounted from the front and rear.

Specifications:

General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 5"	Resonant frequency: 92 Hz	Surround Material: Rubber	5FR-X8 ohm-465A
Rated Impedance: 8 ohm	Re: 5.6 ohm	Cone material: Paper	
Power handling	Qes: 0.73	Spider: Nomex	
AES Power: 60 watts	Qms: 11.4	Plate thickness: 5 mm	
Program Power: 120 watts	Qts: 0.69	Peak to peak linear cone displacement: 9.6 mm	Recone kits:
Peak Power: 240 watts	Vas: 3.8 liters	Overall diameter: 130.5 mm	RC5FRX-465A
Voice Coil	Sd: 90 cm ²	Bolt circle diameter: 139 mm	
Diameter: 1 in.	Sensitivity: 90 dB	Baffle cutout dia.: 113.5 mm	In many cases REDCATT
Winding wire: Copper	Mms: 8.8 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Former: kapton	Bl: 6.3	Depth (flange to rear): 61 mm	16 ohms versions. Indicate
Winding height: 9 mm	Le: 0.28 mH	Net weight: 0.99kg	what impedance do you need
			in your request.

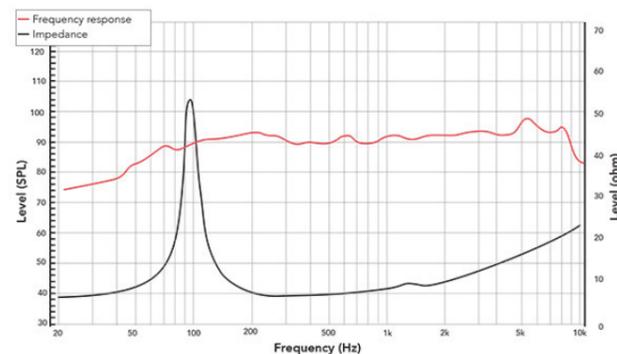Frequency response & Impedance

Frequency response measured on IAC baffle

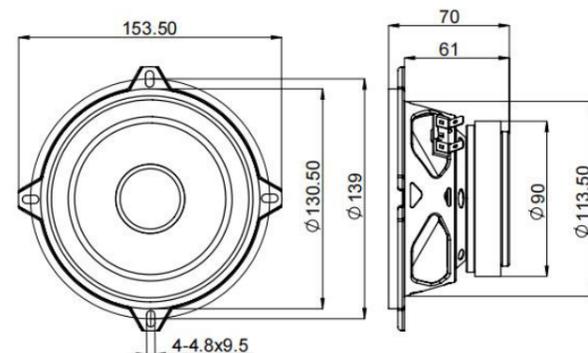2D drawing

5"

5FHW

Woofer



REDCATT
**Key features:**

- SMALL SUB-WOOFERS, HI-FI APPLICATIONS
- DESIGNED FOR INDOOR OR OUTDOOR APPLICATIONS

Design notes:

The 5FHW was designed for woofer applications in either home hi-fi or outdoor speaker systems.

Our engineers have designed polypropylene cone and dustcap for this driver, combined with ferrite magnetic circuit.


Overall, this model provides great level of balance between the performance and cost.

The cone, dust cap and surround


material are produced with UV stabilizers. Furthermore, the state of the art REDCATT adhesives dispensing and selection ensures the driver is waterproof and thus can be used in outdoor applications.

Specifications:

General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 5"	Resonant frequency: 50 Hz	Surround Material: Rubber	5FHW-X4 ohm-380
Rated Impedance: 4 ohm	Re: 3.2 ohm	Cone material: PP	
Power handling	Qes: 0.38	Spider: Nomex	
AES Power: 30 watts	Qms: 4.94	Plate thickness: 6 mm	
Program Power: 60 watts	Qts: 0.35	Peak to peak linear cone displacement: 11.2 mm	Recone kits:
Peak Power: 120 watts	Vas: 6.55 liters	Overall diameter: 131 mm	RC5FHWX-380
Voice Coil	Sd: 86.6 cm ²	Bolt circle diameter: 123 mm	
Diameter: 1 in.	Sensitivity: 86 dB	Baffle cutout dia.: 112 mm	In many cases REDCATT
Winding wire: Copper	Mms: 15.8 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Former: Aluminum	Bl: 6.55	Depth (flange to rear): 60 mm	16 ohms versions. Indicate
Winding height: 12.4 mm	Le: 0.66 mH	Net weight: 1.23kg	what impedance do you need
			in your request.

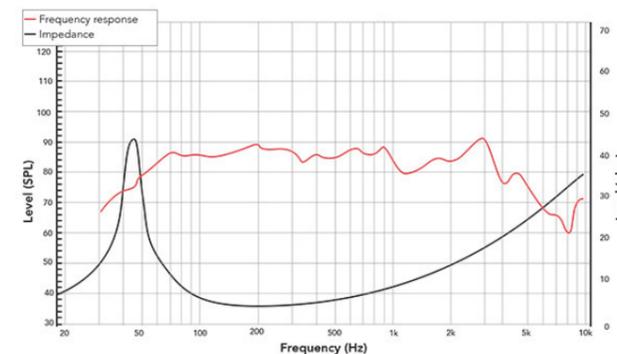Frequency response & Impedance

Frequency response measured on IAC baffle

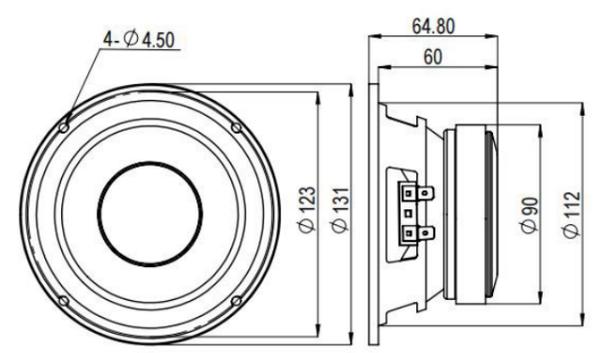2D drawing
info@redcatt.net
www.redcatt.net
info@redcatt.net
www.redcatt.net

5" | 51FHW

Woofer



Key features:

- WIDE FREQUENCY RANGE
- VERY LOW HARMONIC DISTORTION

Design notes:


Introducing the 51FHW, a compact yet powerful woofer that redefines performance in our product lineup. Engineered with an optimized cone, surround, dust cap, and spider design, this woofer utilizes advanced materials and a cutting-edge magnetic circuit to deliver exceptional sound quality across a wide frequency range. Experience minimal breakup modes and harmonic distortion artifacts, allowing for crystal-clear audio reproduction. With the capability

to perform seamlessly up to 15kHz, the 51FHW is the perfect choice for those seeking a well-balanced and high-performing solution in a compact form. Elevate your audio experience with the 51FHW!

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 5"	Resonant frequency: 57 Hz	Surround Material: Rubber	51FHW-X8 ohm-562B
Rated Impedance: 8 ohm	Re: 6.9 ohm	Cone material: Paper	
Power handling	Qes: 0.34	Spider: Nomex	
AES Power: 30 watts	Qms: 3.9	Plate thickness: 4 mm	
Program Power: 60 watts	Qts: 0.31	Peak to peak linear cone displacement: 11.4 mm	Recone kits:
Peak Power: 120 watts	Vas: 3.28 liters	Overall diameter: 123.8 mm	RC51FHWX-562B
Voice Coil	Sd: 52.8 cm ²	Bolt circle diameter: 114 mm	
Diameter: 1 in.	Sensitivity: 85 dB	Baffle cutout dia.: 94 mm	In many cases REDCATT
Winding wire: CCAW	Mms: 8.6 grams	Number of mounting holes: 6	produces 4 ohms, 8 ohms and
Former: Aluminum	Bl: 8.1	Depth (flange to rear): 50.5 mm	16 ohms versions. Indicate
Winding height: 12.5 mm	Le: 0.64 mH	Net weight: 0.85kg	what impedance do you need
			in your request.

Frequency response & Impedance

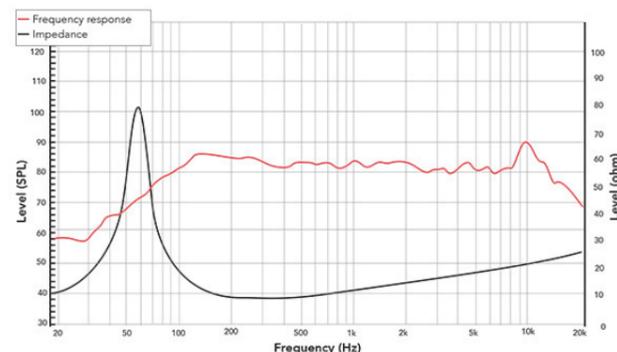

Frequency response measured on IAC baffle

2D drawing

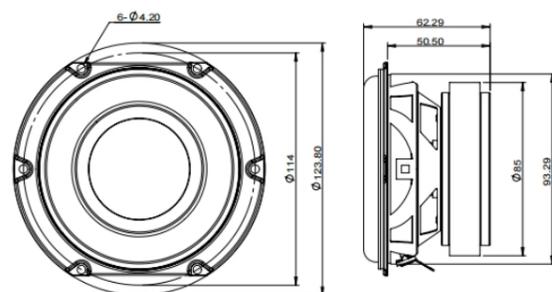

6" | 6NPM

Mid-range



Key features:

- VERY HIGH EFFICIENCY MIDRANGE
- ULTRA LOW HARMONIC DISTORTION
- HIGH POWER HANDLING

Design notes:

The 6NPM is a very high efficiency, (97 dB 1 watt / 1 meter in 1l enclosure) 6-inch midrange speaker with incredibly linear frequency response characteristics and ultra low harmonic distortion artifacts. The 6NPM has extremely high sound quality. The 6NPM uses a lightweight paper pulp, specifically developed for this application. This unique cone provides the ideal weight to strength ratio.


Voice Coil
At the core of the 6NPM is it, Åôs voice coil technology featuring edge wound aluminum ribbon wire. Unique lightweight and very short former provides the ideal transfer of power between the voice coil and the cone assembly and assists in reducing the distortion artifacts. By combining this material with the state of the art adhesives, the 6NPM delivers incredible performance. The neodymium magnet is in a direct

contact with the CNC exposed aluminum section of the basket, hold in place by our thermal transfer adhesives. This design dramatically improves the heat transfer. Further more, based upon a request, we have developed added on aluminum heat-sink. The heat-sink is a recommended optional accessory for applications in sealed mid-range, low volume enclosures.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 6"	Resonant frequency: 150 Hz	Surround Material: Fabric	6NPM-X8 ohm-164
Rated Impedance: 8 ohm	Re: 6.9 ohm	Cone material: Paper	
Power handling	Qes: 0.38	Spider: Nomex	
AES Power: 180 watts	Qms: 4.58	Plate thickness: 6 mm	
Program Power: 360 watts	Qts: 0.35	Peak to peak linear cone displacement: 7.2 mm	Recone kits:
Peak Power: 720 watts	Vas: 2.9 liters	Overall diameter: 162 mm	RC6NPMX-164
Voice Coil	Sd: 143.1 cm ²	Bolt circle diameter: 172 mm	
Diameter: 1.75 in.	Sensitivity: 97 dB	Baffle cutout dia.: 145 mm	In many cases REDCATT
Winding wire: Aluminum	Mms: 11.1 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 13.7	Depth (flange to rear): 52.5 mm	16 ohms versions. Indicate
Winding height: 6.8 mm	Le: 0.16 mH	Net weight: 1.2kg	what impedance do you need
			in your request.

Frequency response & Impedance

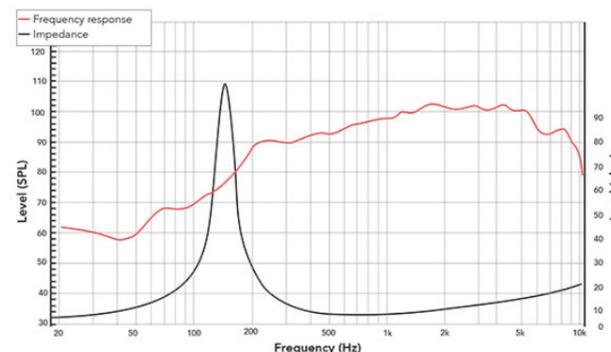

Frequency response measured on IAC baffle

2D drawing

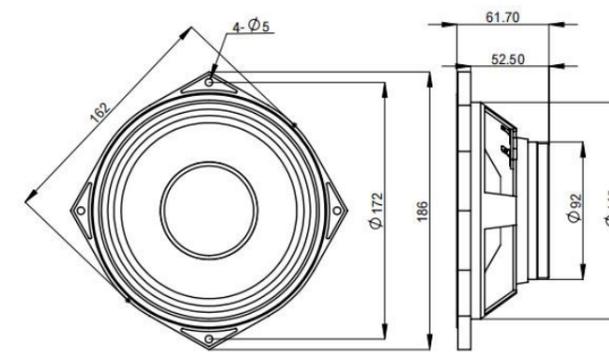

6" | 6FHM

Mid-woofer



Key features:

- 3 LAYER CONE, CONSISTING HI-END 1K CARBON FIBER ON NOMEX HONEYCOMB CORE
- FEM OPTIMIZED MOTOR STRUCTURE
- LOW HARMONIC DISTORTION

Design notes:

The 6FHM is a high efficiency, (89 dB 1 watt / 1 meter) 6-inch mid-woofer with incredibly linear frequency response characteristics and ultra low harmonic distortion artifacts. The 6FHM uses a light-weight 1k carbon fiber material, assembled on both sides of Nomex honey-comb core. This unique cone provides the ideal weight to strength ratio. The rubber surround has been FEM modeled and optimized. The honeycomb cone with high-end 1k carbon

fiber material provides remarkable strength, while pushing the cone break-up modes to high frequencies, significantly extending the working range of the speaker.


The cone
The 6FHM cone is made using 1k carbon fiber honey-comb, placed from both sides of Nomex core, while the dustcap is made off hard-anodization reinforced aluminum. The dustcap shape and the hard anodiz-

ing are further improving the mid to high frequency behavior.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 6"	Resonant frequency: 36 Hz	Surround Material: Rubber	6FHM-X8 ohm-152C
Rated Impedance: 8 ohm	Re: 6.9 ohm	Cone material: CF Honey-	
	Qes: 0.29	Spider: Nomex	
Power handling	Qms: 12.7	Plate thickness: 6 mm	
AES Power: 40 watts	Qts: 0.29	Peak to peak linear cone displacement: 8.8 mm	
Program Power: 80 watts	Vas: 26.1 liters	Overall diameter: 181.5 mm	Recone kits:
Peak Power: 160 watts	Sd: 132.7 cm ²	Bolt circle diameter: 169.5 mm	RC6FHMX-152C
Voice Coil	Sensitivity: 89 dB	Baffle cutout dia.: 151 mm	
Diameter: 1.3 in.	Mms: 18.1 grams	Number of mounting holes: 6	In many cases REDCATT
Winding wire: CCAR	Bl: 9.89	Depth (flange to rear): 81.7 mm	produces 4 ohms, 8 ohms and
Former: Kapton	Le: 0.26 mH	Net weight: 2.4kg	16 ohms versions. Indicate
Winding height: 14.5 mm			what impedance do you need
			in your request.

Frequency response & Impedance

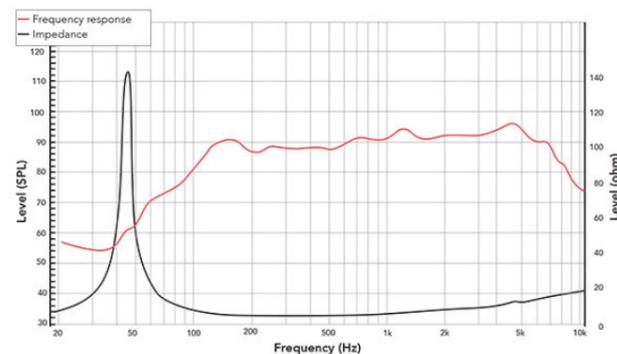

Frequency response measured on IAC baffle

2D drawing

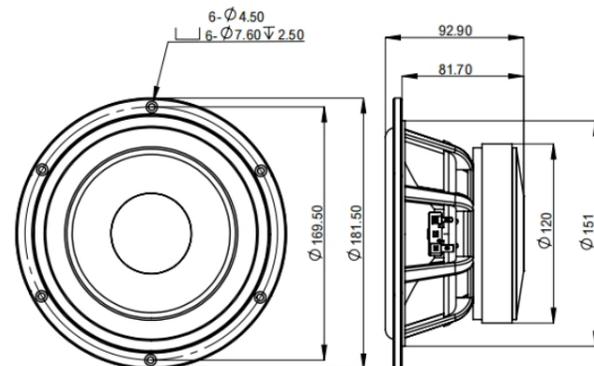

6" | 61XR

Mid-woofer



Key features:

- EXTENDED FREQUENCY RESPONSE, INCREDIBLE SOUND REPRODUCTION CLARITY
- SECONDARY AND STATIC SHORTING COIL
- HIGH POWER HANDLING

Design notes:

The 61XR was designed to be simply the best driver for 2-way and multi-way systems on the market. We bring this with clarity in the mid-frequencies and undistorted bass. The combination of our XR patented technology with static shorting coil brings a nonparallel opportunity to the audio designers. Motor Design
The magnetic design incorporates large neodymium magnets placed along the voice

coil winding, together with the 2nd and static coil placed on the pole piece. This has allowed us to push the cone excursion to 30mm peak to peak, while lowering the inductance. The shorting coil covers the complete main coil excursion. This is also an improvement compared to some previous designs on the market.

Our extensive R&D on the surround foam material has yielded material that has proven its benefits over and over


again. The surround is extremely light, yet it allows the cone excursion as the traditional, but heavier, rubber surround.

61XR best application is in hi-quality home hi-fi applications and studio monitors where the requirements for precise sound reproduction without distortion artifacts are required.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 6"	Resonant frequency: 64 Hz	Surround Material: Foam	61XR-X4 ohm-404D
Rated Impedance: 4 ohm	Re: 3.1 ohm	Cone material: Paper	
	Qes: 0.96	Spider: Nomex	
Power handling	Qms: 2.88	Plate thickness: 27 mm	
AES Power: 100 watts	Qts: 0.72	Peak to peak linear cone displacement: 19.6 mm	Recone kits:
Program Power: 200 watts	Vas: 8.6 liters	Overall diameter: 181.5 mm	RC61XR-404D
Peak Power: 400 watts	Sd: 132.7 cm ²	Bolt circle diameter: 169.5 mm	
Voice Coil	Sensitivity: 87 dB	Baffle cutout dia.: 151 mm	In many cases REDCATT
Diameter: 1.75 in.	Mms: 17.3 grams	Number of mounting holes: 6	produces 4 ohms, 8 ohms and
Winding wire: Copper	Bl: 4.77	Depth (flange to rear): 94 mm	16 ohms versions. Indicate
Former: Glass Fiber	Le: 0.06 mH	Net weight: 1.5kg	what impedance do you need
Winding height: 10.3 mm			in your request.

Frequency response & Impedance

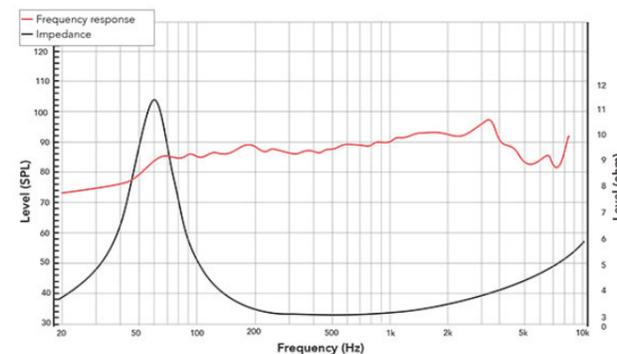

Frequency response measured on IAC baffle

2D drawing

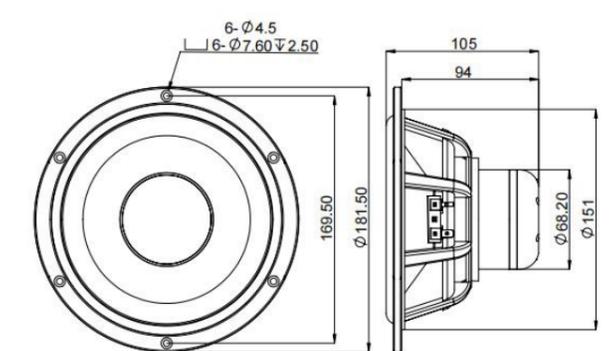

7" | 61NPM

Mid-woofer



Key features:

- VERY GOOD PERFORMANCE IN MID FREQUENCIES
- COMPACT DESIGN THAT DELIVERS VERY HIGH PERFORMANCE
- HIGH POWER HANDLING

Design notes:

61NPM was developed for all applications where compact and lightweight mid-woofer is required.

The driver delivers very good performance in mid-frequencies, with a good extension into the low frequencies.

Neodymium based magnetic circuit was optimized to deliver the highest level of performance.

Lightweight paper cone with glass fibers is attached to, ÅM, Å roll fabric


surround. It provides great combination that delivers very good performance across wide range of frequencies.

Our newly designed basket was structurally reinforced and supports the magnetic structure with ease. Furthermore, the driver sports front and rear gaskets, thus you can mount it into the baffle as front or rear mount.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 7"	Resonant frequency: 92 Hz	Surround Material: Fabric	61NPM-X8 ohm-466A
Rated Impedance: 8 ohm	Re: 5.2 ohm	Cone material: Paper	
Power handling	Qes: 0.38	Spider: Nomex	
AES Power: 100 watts	Qms: 5.6	Plate thickness: 6 mm	
Program Power: 200 watts	Qts: 0.36	Peak to peak linear cone displacement: 10.4 mm	Recone kits:
Peak Power: 400 watts	Vas: 7 liters	Overall diameter: 167 mm	RC61NPMX-466A
Voice Coil	Sd: 143.1 cm ²	Bolt circle diameter: 155 mm	
Diameter: 1.5 in.	Sensitivity: 95 dB	Baffle cutout dia.: 145.9 mm	In many cases REDCATT
Winding wire: Copper	Mms: 12.3 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Former: kapton	Bl: 9.8	Depth (flange to rear): 61.5 mm	16 ohms versions. Indicate
Winding height: 10.6 mm	Le: 0.37 mH	Net weight: 0.8kg	what impedance do you need
			in your request.

Frequency response & Impedance

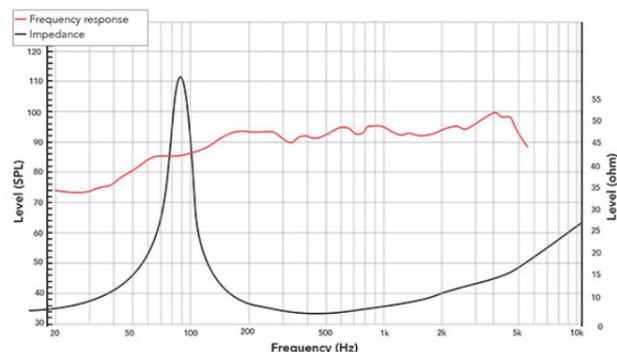

Frequency response measured on IAC baffle

2D drawing

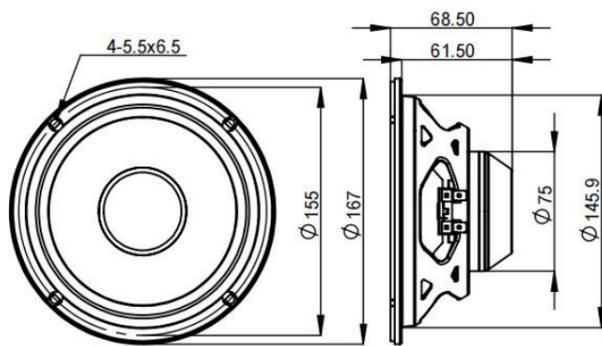

7" | 61FIND

Mid-woofer



Key features:

- EXTENDED FREQUENCY RESPONSE
- LIGHTWEIGHT, YET STRONG PAPER CONE. WEATHER SEALED, FIRE-RETARDANT MATERIALS
- AFFORDABLE DESIGN

Design notes:


61FIND continues our series of affordable ferrite mid-woofers. The driver was designed with ferrite magnetic circuit, combined with lightweight, yet strong, paper cone and fabric surround. In the heart of the 61FIND is 2, Å CCAW high temperature wire wound on TIL former. This combination provides remarkable strength, great temperature resistance and ensures high level of move force transfer onto the cone without sound artifacts.

All steel parts are extensively treated for weather protection. Cone neck was furthermore treated with fire-retardants. That together with non-flammable Nomex spider and TIL voice coil former allows the designers accommodate this driver in UL listed products.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 7"	Resonant frequency: 130 Hz	Surround Material: Fabric	61FIND-X16 ohm-332A
Rated Impedance: 16 ohm	Re: 14.9 ohm	Cone material: Paper	
Power handling	Qes: 0.71	Spider: Nomex	
AES Power: 150 watts	Qms: 5.13	Plate thickness: 8 mm	
Program Power: 300 watts	Qts: 0.62	Peak to peak linear cone displacement: 7.2 mm	Recone kits:
Peak Power: 600 watts	Vas: 2.64 liters	Overall diameter: 165.2 mm	RC61FINDX-332A
Voice Coil	Sd: 132.7 cm ²	Bolt circle diameter: 157.5 mm	
Diameter: 2 in.	Sensitivity: 92 dB	Baffle cutout dia.: 144.5 mm	In many cases REDCATT
Winding wire: CCAW	Mms: 14.3 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 15.64	Depth (flange to rear): 78 mm	16 ohms versions. Indicate
Winding height: 12.6 mm	Le: 0.92 mH	Net weight: 2.7kg	what impedance do you need
			in your request.

Frequency response & Impedance

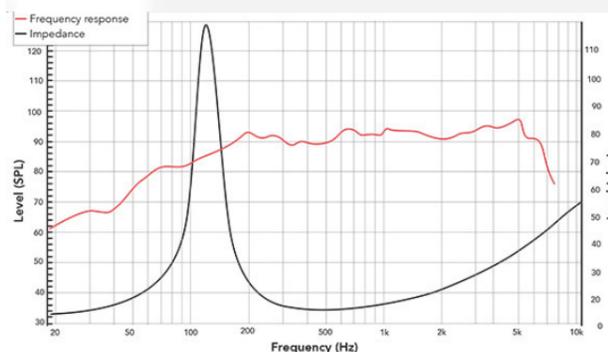

Frequency response measured on IAC baffle

2D drawing

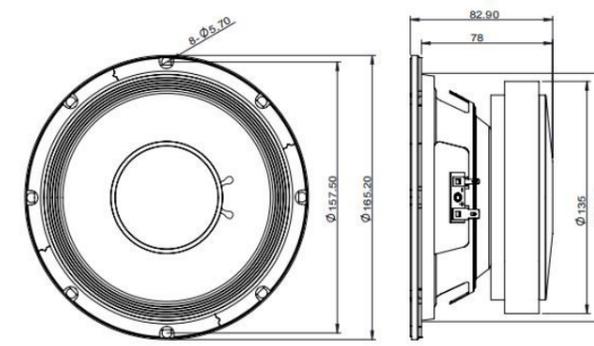

7" | 61FHM

Mid-woofer



Key features:

- EXTENDED FREQUENCY RESPONSE

Design notes:

61FHM mid-woofer was designed for outdoor applications, yet it will shine in hi-fi home and studio applications as well.

Optimized ferrite based magnetic circuit with good air-venting features ensures long lasting performance.

Our engineers have chosen polypropylene cone with rubber surround for this model. Both of these components are produced with UV stabilizers. Furthermore,

REDCATT state of the art adhesives and dispensing techniques ensures waterproof seals in all weather exposed glue joints. Sealing to the exposure can be guaranteed by EVA gaskets or based upon a request by Form In Place Gaskets.

The audio system designers can rest assured we have extensively tested this product with UV exposure, salt exposure and waterproofing.

The extended mid-frequency

response allows the systems to be used with higher resonance frequency HF units. For the best performance in the audio systems, we recommend usage in vented enclosures.

Specifications:

General specs		T/S Parameters	
Nominal Diameter:	7"	Resonant frequency:	44 Hz
Rated Impedance:	4 ohm	Re:	3.2 ohm
Power handling		Qes:	0.58
AES Power:	50 watts	Qms:	5.27
Program Power:	100 watts	Qts:	0.52
Peak Power:	200 watts	Vas:	14.4 liters
Voice Coil		Sd:	132.7 cm ²
Diameter:	1 in.	Sensitivity:	86 dB
Winding wire:	Copper	Mms:	23.04 grams
Former:	Aluminum	Bl:	6.02
Winding height:	12.4 mm	Le:	0.74 mH


Design details	
Surround Material:	Rubber
Cone material:	PP
Spider:	Nomex
Plate thickness:	6 mm
Peak to peak linear cone displacement	12.2 mm
Overall diameter:	165.5 mm
Bolt circle diameter:	157 mm
Baffle cutout dia.:	143 mm
Number of mounting holes:	4
Depth (flange to rear):	68 mm
Net weight:	1.04kg

Ordering codes:
61FHM-X4 ohm-381

Recone kits:
RC61FHMx-381


In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

Frequency response & Impedance

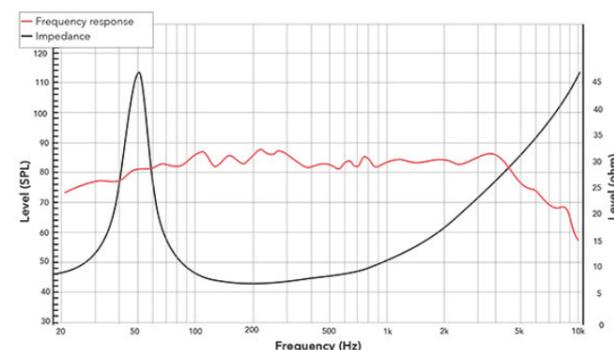

Frequency response measured on IAC baffle

2D drawing

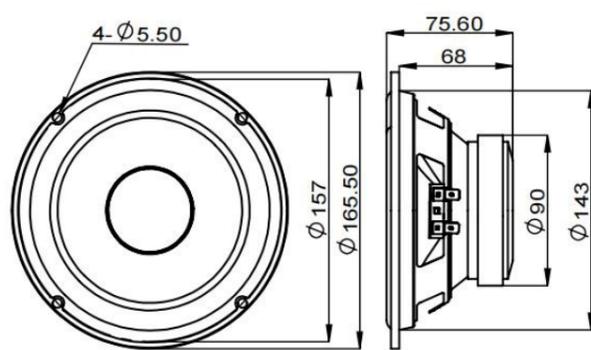

7" | 61FHM

Mid-woofer



Key features:

- EXTENDED FREQUENCY RESPONSE
- HARD ANODIZED ALUMINUM CONE, ALUMINUM BASKET
- DESIGNED FOR HI-FI AND OUTDOOR APPLICATIONS

Design notes:

61FHM mid-woofer was designed for outdoor applications, yet it will shine in hi-fi home and studio applications as well.

Optimized ferrite based magnetic circuit with good air-venting features ensures long lasting performance.

Our engineers have chosen hard-anodized cone with rubber surround for this model. Both of these components are produced with UV stabilizers. Furthermore, REDCATT state of the art adhe-

sives and dispensing techniques ensures waterproof seals in all weather exposed glue joints. Sealing to the exposure can be guaranteed by EVA gaskets or based upon a request by Form In Place Gaskets.

The audio system designers can rest assured we have extensively tested this product with UV exposure, salt exposure and waterproofing.

The extended mid-frequency response allows the systems to be used with

higher resonance frequency HF units. For the best performance in the audio systems, we recommend usage in sealed enclosures. In this model the aluminum cone further improves the mid-frequency response and lowers the harmonic distortion artifacts.

Specifications:

General specs		T/S Parameters	
Nominal Diameter:	7"	Resonant frequency:	37 Hz
Rated Impedance:	8 ohm	Re:	5.8 ohm
Power handling		Qes:	0.52
AES Power:	60 watts	Qms:	11.01
Program Power:	120 watts	Qts:	0.49
Peak Power:	240 watts	Vas:	28.2 liters
Voice Coil		Sd:	132.7 cm ²
Diameter:	1.5 in.	Sensitivity:	88 dB
Winding wire:	CCAW	Mms:	16.4 grams
Former:	Glass Fiber	Bl:	6.6
Winding height:	17.6 mm	Le:	0.4 mH


Design details	
Surround Material:	Rubber
Cone material:	Aluminum
Spider:	Nomex
Plate thickness:	5 mm
Peak to peak linear cone displacement	17.4 mm
Overall diameter:	181.5 mm
Bolt circle diameter:	169.5 mm
Baffle cutout dia.:	151 mm
Number of mounting holes:	6
Depth (flange to rear):	78.6 mm
Net weight:	1.61kg

Ordering codes:
61FHM-X8 ohm-430A

Recone kits:
RC61FHMx-430A


In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

Frequency response & Impedance

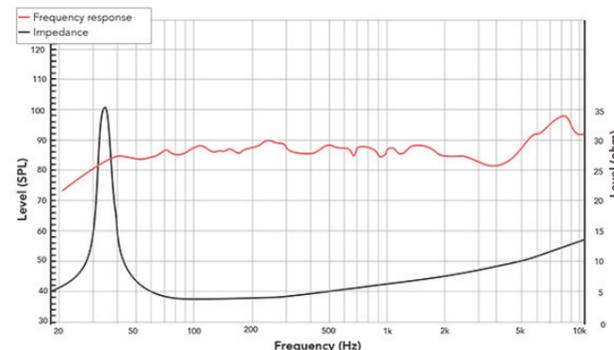

Frequency response measured on IAC baffle

2D drawing

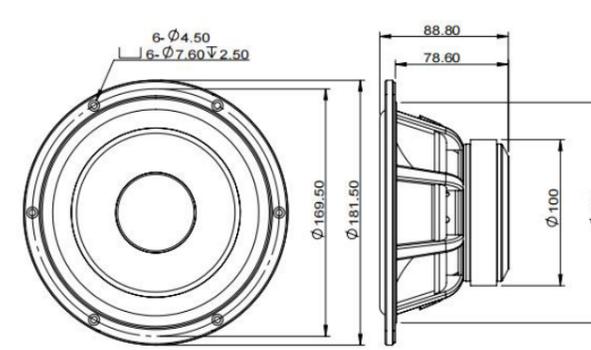

8" | 8NPM

Mid-woofer



Key features:

- HI SENSITIVITY
- HI POWER HANDLING
- DESIGNED FOR APPLICATIONS WHERE ARE SIZABLE AMOUNTS OF MID-FREQUENCIES RE-

Design notes:

The 8NPM is a high efficiency, (96dB 1watt / 1 meter) 8-inch mid-woofer with extended mid frequency response and high power handling capability. The 8NPM uses a lightweight half pressed paper cone along with a double roll fabric surround. Spider is made of Nomex material with optimized shape for well controlled piston motion. The used high quality components ensure long lasting performance even in high powered applications. The chosen

material combination provides remarkable strength, high efficiency and sustained output under extreme conditions.


Power Handling
The voice coil featuring Kapton former material capable of withstanding peak temperatures in excess of 280C, well beyond the thermal requirements of modern audio systems. Former strength provides the ideal transfer of power between the voice coil and

the cone assembly and assists in reducing distortion artifacts. By combining this material with state of the art adhesives and our winding voice coil technology, the 8NPM delivers incredibly high performance.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 8"	Resonant frequency: 79 Hz	Surround Material: Fabric	8NPM-X8 ohm-157
Rated Impedance: 8 ohm	Re: 5.4 ohm	Cone material: Paper	
Power handling	Qes: 0.31	Spider: Nomex	
AES Power: 200 watts	Qms: 3.85	Plate thickness: 8 mm	
Program Power: 400 watts	Qts: 0.29	Peak to peak linear cone displacement: 10.2 mm	Recone kits:
Peak Power: 800 watts	Vas: 10.9 liters	Overall diameter: 209.5 mm	RC8NPMX-157
Voice Coil	Sd: 213.8 cm ²	Bolt circle diameter: 197.5 mm	
Diameter: 2 in.	Sensitivity: 96 dB	Baffle cutout dia.: 185 mm	In many cases REDCATT
Winding wire: CCAW	Mms: 23.9 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Kapton	Bl: 14.2	Depth (flange to rear): 87.3 mm	16 ohms versions. Indicate
Winding height: 15.4 mm	Le: 0.6 mH	Net weight: 1.8kg	what impedance do you need
			in your request.

Frequency response & Impedance

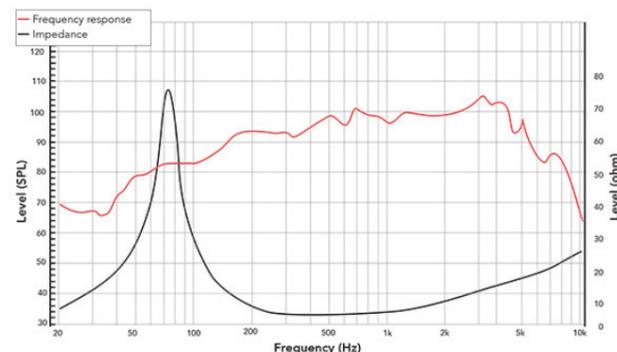

Frequency response measured on IAC baffle

2D drawing

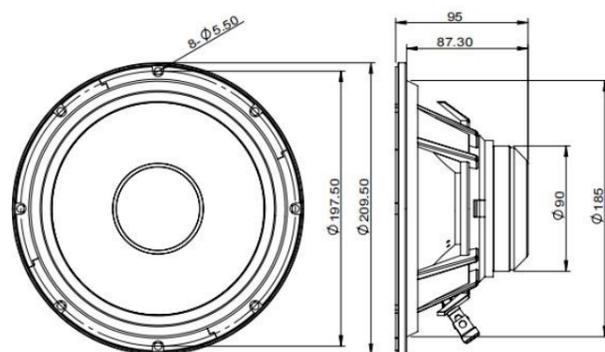

8" | 8FR

Full-range



Key features:

- LIGHTWEIGHT, YET STRONG PAPER CONE REINFORCED BY BAMBOO FIBERS
- WORKING RANGE UP TO 15KHZ
- AESTHETICS TUNED FOR MODER HI-FI LOOK

Design notes:


8FR was developed for Hi-Fi applications where single point audio source is required. Our engineers designed the cone to be lightweight, yet strong, using our new paper pulp reinforced by bamboo fibers. The driver sports wizard cone that extends the working range up to 15kHz, paired with bullet style phase plug. Combination of these two key features ensures smooth frequency response and an optimal sound reproduction on and off axes.

Magnetic circuit was design to deliver robust B field across the whole range of working frequencies. Additional copper shorting cup further improves the driver behavior in mid-high working region. The aesthetics of this driver were tuned to support modern hi-fi system designs, where the driver can be exposed to the end user. Distinctive colors ensures the driver can be featured as part of the overall industrial design.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 8"	Resonant frequency: 53 Hz	Surround Material: Fabric	8FR-X4 ohm-551A
Rated Impedance: 4 ohm	Re: 3.8 ohm	Cone material: Paper	
Power handling	Qes: 0.396	Spider: Nomex	
AES Power: 30 watts	Qms: 8.473	Plate thickness: 6 mm	
Program Power: 60 watts	Qts: 0.378	Peak to peak linear cone displacement: 9.8 mm	Recone kits:
Peak Power: 120 watts	Vas: 36.8 liters	Overall diameter: 210 mm	RC8FRX-551A
Voice Coil	Sd: 213.8 cm ²	Bolt circle diameter: 195.5 mm	
Diameter: 1.6 in.	Sensitivity: 93 dB	Baffle cutout dia.: 186.88 mm	In many cases REDCATT
Winding wire: Aluminum	Mms: 18.38 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: kapton	Bl: 7.86	Depth (flange to rear): 91.8 mm	16 ohms versions. Indicate
Winding height: 17.6 mm	Le: 0.08 mH	Net weight: 2.55kg	what impedance do you need
			in your request.

Frequency response & Impedance

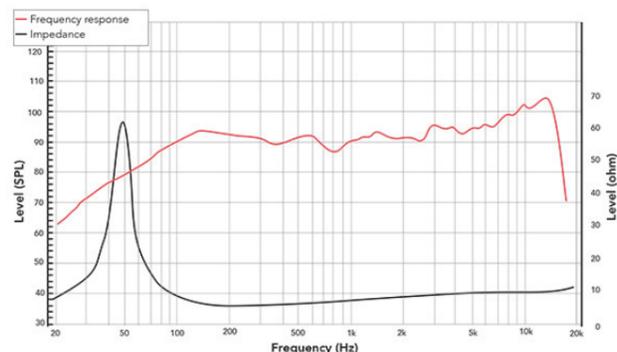

Frequency response measured on IAC baffle

2D drawing

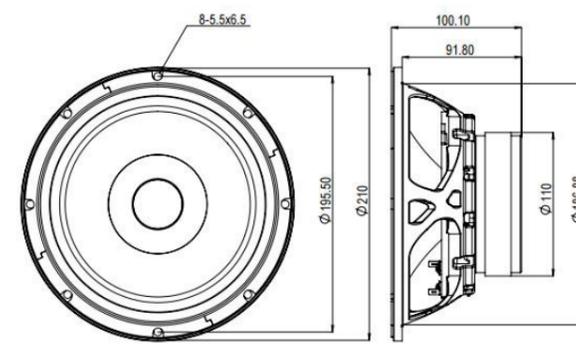

8" | 8FIND

Mid-woofer



Key features:

- EXTENDED FREQUENCY RESPONSE, HIGH EFFICIENCY
- CARBON FIBER LOADED AND REINFORCED PAPER CONE
- NOMEX SPIDER

Design notes:

The 8FIND is a high efficiency, (97 dB 1watt / 1 meter) 8-inch mid bass woofer with incredibly linear frequency response characteristics, high power handling capability while generating low harmonic distortion artifacts.


The 8FIND uses a lightweight carbon fiber loaded cone assembly along with a precision double roll surround. This combination provides remarkable strength, high efficiency and a excursion linearity of 9.4mm.

Magnetic Circuit
REDCATT engineers have developed an efficient, ferrite based magnetic circuit, capable of delivering the highest level of performance providing a consistent, high integrity magnetic flux gap, low distortion characteristic. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 8"	Resonant frequency: 70 Hz	Surround Material: Fabric	8FIND-X8 ohm-030
Rated Impedance: 8 ohm	Re: 5.7 ohm	Cone material: Paper	
	Qes: 0.25	Spider: Nomex	
Power handling	Qms: 6.4	Plate thickness: 8 mm	
AES Power: 200 watts	Qts: 0.25	Peak to peak linear cone displacement: 9.4 mm	Recone kits:
Program Power: 400 watts	Vas: 18.2 liters	Overall diameter: 209.5 mm	RC8FINDX-030
Peak Power: 800 watts	Sd: 227 cm ²	Bolt circle diameter: 197.5 mm	
Voice Coil	Sensitivity: 97 dB	Baffle cutout dia.: 185 mm	In many cases REDCATT
Diameter: 2 in.	Mms: 20.7 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Winding wire: CCAW	Bl: 14.3	Depth (flange to rear): 91.5 mm	16 ohms versions. Indicate
Former: Glass Fiber	Le: 0.48 mH	Net weight: 3.73kg	what impedance do you need
Winding height: 12.4 mm			in your request.

Frequency response & Impedance

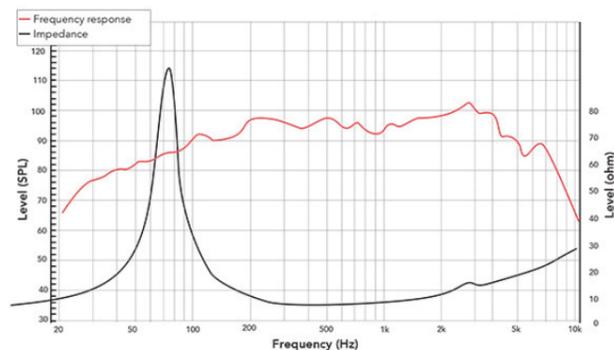

Frequency response measured on IAC baffle

2D drawing

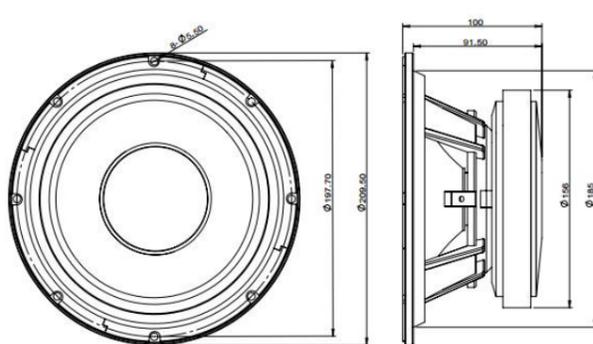

8" | 8FHW

Woofer



Key features:

- HEAVY-DUTY RUBBER SURROUND AND PAPER CONE
- IDEAL FOR SMALL SUBWOOFERS, HI-FI APPLICATIONS
- HIGH POWER HANDLING

Design notes:

The 8FHW is 8-inch low frequency woofer with linear frequency response characteristics, high power handling capability while generating low harmonic distortion artifacts.


The single roll rubber surround design allows the cone to travel in long linear motion. Together with lightweight, yet strong cone, this combination provides remarkable strength, high efficiency and a excursion linearity of 13mm (one direction).

Magnetic Circuit
REDCATT engineers have developed an efficient, ferrite based magnetic circuit, capable of delivering the high level of performance providing a consistent, high integrity magnetic flux gap, low distortion characteristic. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 8"	Resonant frequency: 41 Hz	Surround Material: Rubber	8FHW-X4 ohm-088
Rated Impedance: 4 ohm	Re: 4.0 ohm	Cone material: Paper	
	Qes: 0.75	Spider: Conex	
Power handling	Qms: 4.2	Plate thickness: 8 mm	
AES Power: 200 watts	Qts: 0.6	Peak to peak linear cone displacement: 26 mm	Recone kits:
Program Power: 400 watts	Vas: 19.6 liters	Overall diameter: 214 mm	RC8FHWX-088
Peak Power: 800 watts	Sd: 202.3 cm ²	Bolt circle diameter: 204 mm	
Voice Coil	Sensitivity: 84 dB	Baffle cutout dia.: 181 mm	In many cases REDCATT
Diameter: 1.4 in.	Mms: 45.9 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Winding wire: Copper	Bl: 7.88	Depth (flange to rear): 105 mm	16 ohms versions. Indicate
Former: Aluminum	Le: 0.72 mH	Net weight: 2.1kg	what impedance do you need
Winding height: 25.4 mm			in your request.

Frequency response & Impedance

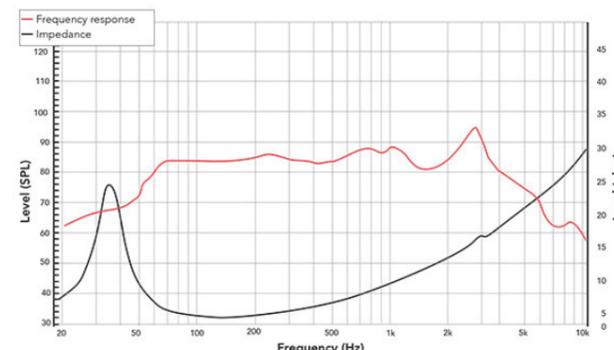

Frequency response measured on IAC baffle

2D drawing

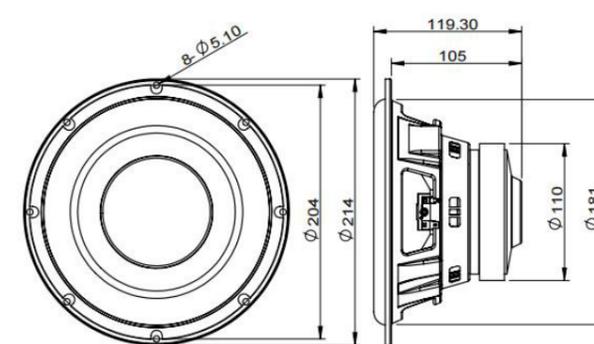

8" | 8FHW

Mid-woofer



Key features:

- MID-WOOFER DESIGNED FOR OUTDOOR OR IN-DOOR APPLICATIONS
- UV STABILIZED POLYPROPYLENE CONE AND RUBBER SURROUND
- COMPONENTS ARE TREATED TO SURVIVE HARSH OUTDOOR ENVIRONMENTS

Design notes:

8FHW was designed as mid-woofer, with extended frequency response to low frequencies, as well as good extension into the mid-frequencies. All parts are intensively treated for outdoor usage, cone, surround material are with UV stabilizers. The used adhesives make sure the driver is waterproof.


combination sports sizable amounts of low frequencies and good behavior in the higher mid-frequencies.

The cone utilizes polypropylene material and rubber surround. This

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 8"	Resonant frequency: 36 Hz	Surround Material: Rubber	8FHW-X4 ohm-382
Rated Impedance: 4 ohm	Re: 3.3 ohm	Cone material: PP	
Power handling	Qes: 0.38	Spider: Nomex	
AES Power: 100 watts	Qms: 4.53	Plate thickness: 8 mm	
Program Power: 200 watts	Qts: 0.35	Peak to peak linear cone displacement: 16.8 mm	Recone kits:
Peak Power: 400 watts	Vas: 34.3 liters	Overall diameter: 209.5 mm	RC8FHWX-382
Voice Coil	Sd: 213.8 cm ²	Bolt circle diameter: 197 mm	
Diameter: 1.2 in.	Sensitivity: 89 dB	Baffle cutout dia.: 184.5 mm	In many cases REDCATT
Winding wire: Copper	Mms: 36.59 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Aluminum	Bl: 8.6	Depth (flange to rear): 86.5 mm	16 ohms versions. Indicate
Winding height: 15.3 mm	Le: 0.89 mH	Net weight: 1.5kg	what impedance do you need

Frequency response & Impedance

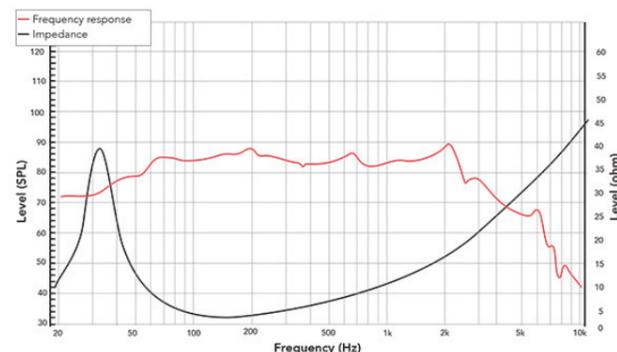

Frequency response measured on IAC baffle

2D drawing

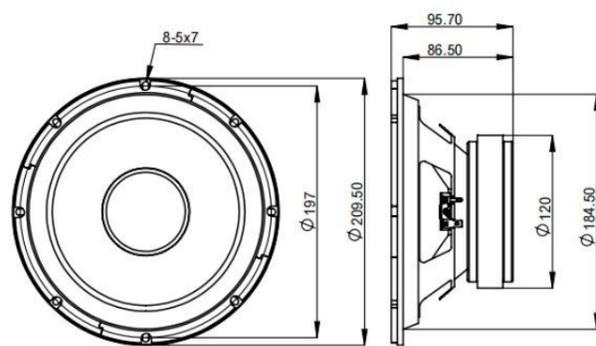

8" | 8FHM

Woofer



Key features:

- EXTENDED FREQUENCY RESPONSE
- 1K CARBON-FIBER NOMEX CORE HONEYCOMB CONE
- IDEAL FOR HIGH QUALITY HI-FI APPLICATIONS, STUDIO MONITORS

Design notes:

The 8FHM is a high efficiency, (89 dB 1 watt / 1 meter) 8-inch mid-woofer with incredibly linear frequency response characteristics and ultra low harmonic distortion artifacts. The 8FHM uses a lightweight 1k carbon fiber material, assembled from both sides of Nomex honey-comb core. This unique cone provides the ideal weight to strength ratio. The rubber surround has been FEM modeled and optimized. The honeycomb cone with high end 1k carbon

fiber material provides remarkable strength, while pushing the cone break-up modes to high frequencies, significantly extending the working range of the speaker.


The cone The 8FHM cone is made using 1k carbon fiber hone-comb, placed from both sides of Nomex core, while the dustcap is made off hard-anodization reinforced aluminum. The dustcap shape and the hard anodizing

are further improving the high frequency behavior.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 8"	Resonant frequency: 38 Hz	Surround Material: Rubber	8FHM-X4 ohm-091
Rated Impedance: 4 ohm	Re: 3.6 ohm	Cone material: CF Honey-	
Power handling	Qes: 0.41	Spider: Nomex	
AES Power: 50 watts	Qms: 12.9	Plate thickness: 8 mm	
Program Power: 100 watts	Qts: 0.39	Peak to peak linear cone displacement: 18.2 mm	Recone kits:
Peak Power: 200 watts	Vas: 32.1 liters	Overall diameter: 223.5 mm	RC8FHM-X4-091
Voice Coil	Sd: 206.1 cm ²	Bolt circle diameter: 210 mm	
Diameter: 1.4 in.	Sensitivity: 89 dB	Baffle cutout dia.: 189 mm	In many cases REDCATT
Winding wire: CCAW	Mms: 31.5 grams	Number of mounting holes: 6	produces 4 ohms, 8 ohms and
Former: kapton	Bl: 8.19	Depth (flange to rear): 94.5 mm	16 ohms versions. Indicate
Winding height: 18 mm	Le: 0.46 mH	Net weight: 2.8kg	what impedance do you need

Frequency response & Impedance

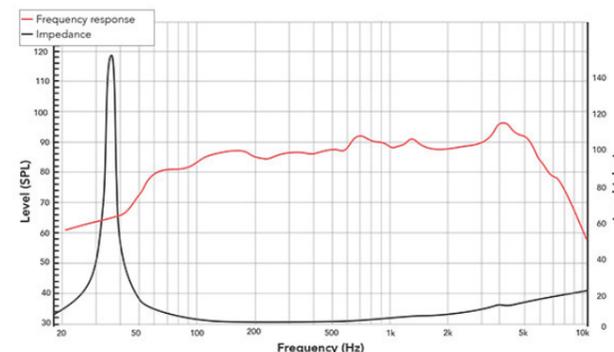

Frequency response measured on IAC baffle

2D drawing

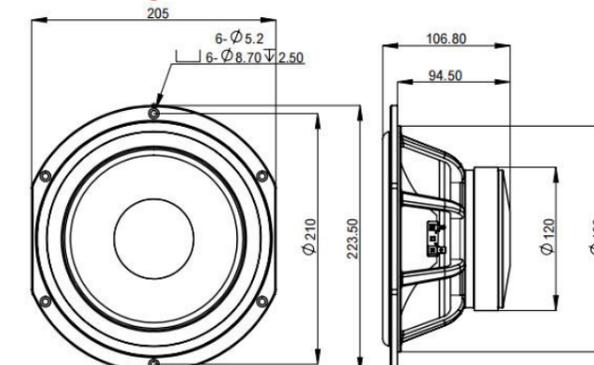

8"

82FHM

Mid-woofer



ONE TO RULE THEM ALL...

Key features:

- EXTENDED FREQUENCY RESPONSE
- HARD ANODIZED ALUMINUM CONE WITH RUBBER SURROUND
- ALUMINUM BASKET

Design notes:

82FHM is mid-woofer driver, designed for hi-fi, studio monitors and outdoor applications. Design sports hard-anodized aluminum cone and dustcap. These two key components extend the working range of the woofer. The parameters were optimized for usage in sealed enclosures.

All metal parts are coated to further increase weatherized protection, surround has UV stabilizers.

Strong aluminum basket was used


in this design which further improves the mechanical fatigue and allow the speaker to be used in demanding portable products.

Further more, we have developed new magnetic circuit for this model. Our clever engineering takes the best balance between the performance and cost. Rest assure we have FEM optimized air-venting of this design that minimizes the air-noise and greatly improves voice coil winding venting.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 8"	Resonant frequency: 42 Hz	Surround Material: Rubber	82FHM-X8 ohm-445A
Rated Impedance: 8 ohm	Re: 5.7 ohm	Cone material: Aluminum	
Power handling	Qes: 0.76	Spider: Nomex	
AES Power: 60 watts	Qms: 3.1	Plate thickness: 5 mm	
Program Power: 120 watts	Qts: 0.61	Peak to peak linear cone displacement: 16.8 mm	Recone kits:
Peak Power: 240 watts	Vas: 33.6 liters	Overall diameter: 223.5 mm	RC82FHM-X445A
Voice Coil	Sd: 213.8 cm ²	Bolt circle diameter: 210 mm	
Diameter: 1.5 in.	Sensitivity: 88 dB	Baffle cutout dia.: 189 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: Copper	Mms: 28.3 grams	Number of mounting holes: 6	
Former: Aluminum	Bl: 7.56	Depth (flange to rear): 87.5 mm	
Winding height: 15.9 mm	Le: 0.47 mH	Net weight: 1.8kg	

Frequency response & Impedance

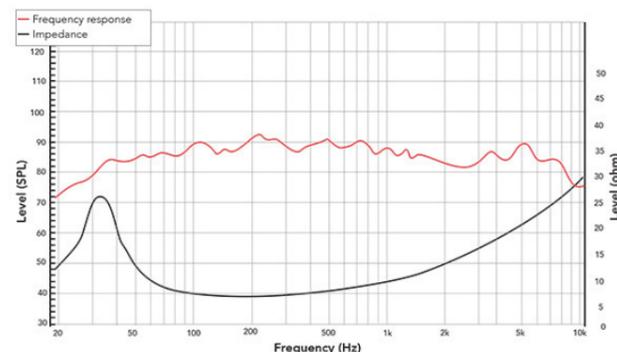

Frequency response measured on IAC baffle

2D drawing

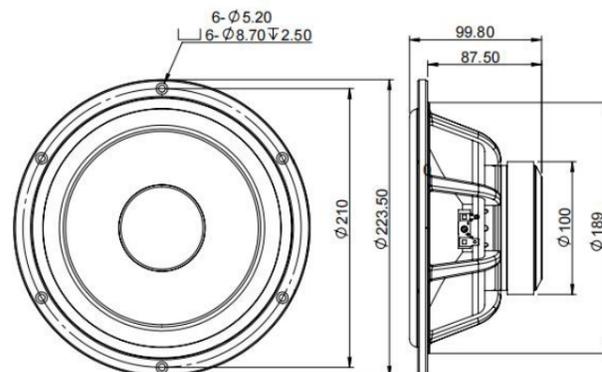

8"

81XR

Woofer

REDCATT



Key features:

- NONPARALLEL VOICE AND LOW FREQUENCY REPRODUCTION QUALITY
- PATENTED MAGNETIC CIRCUIT AND AIR VENTING DESIGN
- EXTREMELY LOW HARMONIC DISTORTION

Design notes:

The 81XR was designed to be simply the best driver for 2-way and multi-way systems on the market, yet this driver will also shine in sub-woofer applications. The combination of our XR patented technology with static shorting coil brings an unparalleled opportunity to the audio designers. The common request for 2-way speakers is, "more of everything." Audio designers wish for more bass, more mids. Well, there you have it! But not only that.

We bring this with clarity in the mid-frequencies and undistorted bass. Our designers were able to achieve THD below 0.5% from 20Hz up to 2.5kHz. There isn't another driver like this on the market.

Motor Design


The magnetic design incorporates large neodymium magnets placed along the voice coil winding, together with the 2nd and static coil placed on the pole piece. This

has allowed us to push the cone excursion to 30mm peak to peak, while lowering the inductance. The shorting coil covers the complete main coil excursion. This is also an improvement compared to some previous designs on the market that utilizes static coil. Unique gap side venting ensures good air circulation, lowers air noise and greatly improves the reliability of this driver.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 8"	Resonant frequency: 73 Hz	Surround Material: Fabric	81XR-X8 ohm-424A
Rated Impedance: 8 ohm	Re: 5.5 ohm	Cone material: Paper	
Power handling	Qes: 0.37	Spider: Nomex	
AES Power: 200 watts	Qms: 1.466	Plate thickness: 31 mm	
Program Power: 400 watts	Qts: 0.3	Peak to peak linear cone displacement: 28.4 mm	Recone kits:
Peak Power: 800 watts	Vas: 7.2 liters	Overall diameter: 210 mm	RC81XRX-424A
Voice Coil	Sd: 201 cm ²	Bolt circle diameter: 195 mm	
Diameter: 2.5 in.	Sensitivity: 93 dB	Baffle cutout dia.: 186.88 mm	In many cases REDCATT
Winding wire: Copper Sq.	Mms: 38 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 16	Depth (flange to rear): 128.3 mm	16 ohms versions. Indicate
Winding height: 18.3 mm	Le: 0.19 mH	Net weight: 4.9kg	what impedance do you need
			in your request.

Frequency response & Impedance

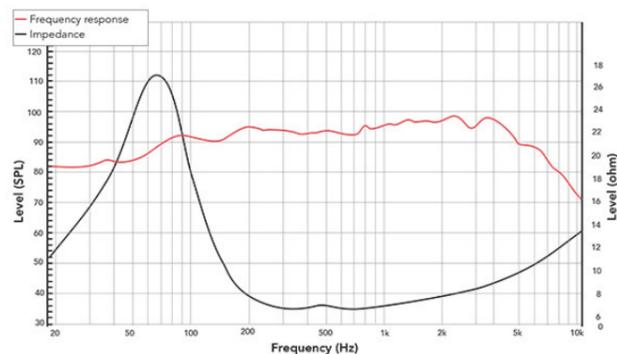

Frequency response measured on IAC baffle

2D drawing

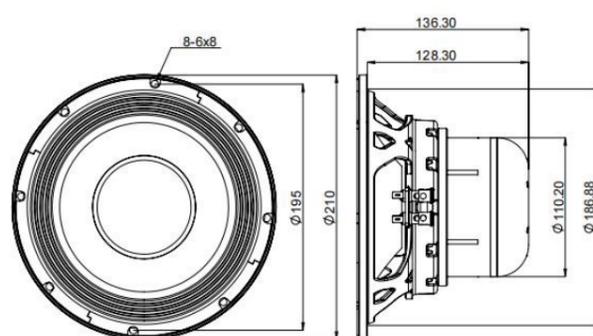

8"

81NPM

Mid-woofer

REDCATT



Key features:

- EXTENDED FREQUENCY RESPONSE
- 2 DEMODULATION RINGS POWERFUL MOTOR STRUCTURE
- DESIGNED FOR 2-WAY AND MULTI-WAY SPEAKER SYSTEMS

Design notes:

The 81NPM was designed for good reproduction of voice. With an extended low-frequency response, this mid-woofer is highly suitable for two-way and multi-way systems. Its high power handling capabilities extend the ideal usage as a mid-range driver in line-array systems. The 81NPM uses a lightweight half-pressed paper cone reinforced by our proprietary cone treatment, which also works as weatherization protection. The used high-quality

components ensure long-lasting performance even in high powered applications. The chosen material combination provides remarkable strength, high efficiency and sustained output under extreme conditions.

Power Handling


The voice coil sports Kapton former material capable of withstanding peak temperatures above 300°C, well beyond

the thermal requirements of modern audio systems. Former strength provides the ideal transfer of power between the voice coil and the cone assembly and assists in reducing distortion artifacts. By combining this material with state of the art adhesives and our winding voice coil technology, the 81NPM delivers incredibly high performance.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 8"	Resonant frequency: 69 Hz	Surround Material: Fabric	81NPM-X8 ohm-373A
Rated Impedance: 8 ohm	Re: 7.1 ohm	Cone material: Paper	
Power handling	Qes: 0.29	Spider: Nomex	
AES Power: 200 watts	Qms: 4.84	Plate thickness: 11 mm	
Program Power: 400 watts	Qts: 0.28	Peak to peak linear cone displacement: 12.8 mm	Recone kits:
Peak Power: 800 watts	Vas: 10.3 liters	Overall diameter: 210 mm	RC81NPMX-373A
Voice Coil	Sd: 219 cm ²	Bolt circle diameter: 195.5 mm	
Diameter: 3 in.	Sensitivity: 93 dB	Baffle cutout dia.: 186.88 mm	In many cases REDCATT
Winding wire: CCAW	Mms: 34.2 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 0.5	Depth (flange to rear): 101.3 mm	16 ohms versions. Indicate
Winding height: 18.6 mm	Le: 0.75 mH	Net weight: 3.2kg	what impedance do you need
			in your request.

Frequency response & Impedance

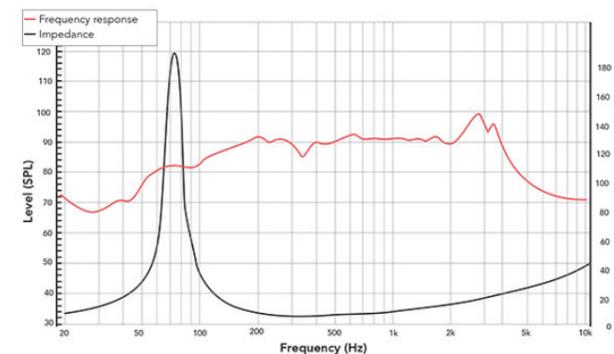

Frequency response measured on IAC baffle

2D drawing

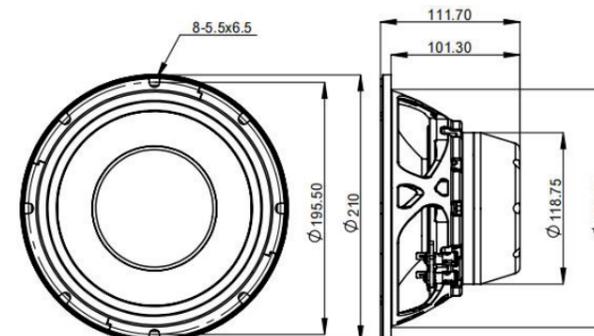

8" | 81FIND

Mid-woofer



Key features:

- EXTENDED FREQUENCY RESPONSE
- IDEAL FOR SMALL AND PORTABLE 2-WAY SYSTEMS
- AFFORDABLE, YET VERY CAPABLE DESIGN FOR COST SENSITIVE PRODUCT

Design notes:

The 81FIND is a high efficiency, (95 dB 1watt / 1 meter) 8-inch woofer with linear frequency response characteristics, good power handling capability while generating low harmonic distortion artifacts. The 81FIND uses a lightweight glass-fiber loaded cone assembly along with a high excursion M-roll surround. This combination provides a lightweight, yet strong, piston.

Ferrite based magnetic circuit, capable of delivering the good level of performance, providing a consistent, high integrity magnetic flux gap, low distortion characteristic and high-efficiency cooling system. The metal parts are extensively coated to provide the maximum weather protection.

engineers for smaller sized, or portable audio products. It has proven its capability over and over again all around the world, many times in challenging applications or environments. 81FIND is proven design that delivers good balance between performance and cost.


Magnetic Circuit

This driver has been chosen by many audio

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 8"	Resonant frequency: 80 Hz	Surround Material: Fabric	81FIND-X8 ohm-290
Rated Impedance: 8 ohm	Re: 4.7 ohm	Cone material: Paper	
Power handling	Qes: 0.53	Spider: Nomex	
AES Power: 200 watts	Qms: 8.35	Plate thickness: 8 mm	
Program Power: 400 watts	Qts: 0.5	Peak to peak linear cone displacement: 13.2 mm	Recone kits:
Peak Power: 800 watts	Vas: 11.3 liters	Overall diameter: 209 mm	RC81FINDX-290
Voice Coil	Sd: 213.8 cm ²	Bolt circle diameter: 197 mm	
Diameter: 2 in.	Sensitivity: 95 dB	Baffle cutout dia.: 180 mm	In many cases REDCATT
Winding wire: CCAW	Mms: 22.6 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 10.2	Depth (flange to rear): 91.5 mm	16 ohms versions. Indicate
Winding height: 12.5 mm	Le: 0.44 mH	Net weight: 2.8kg	what impedance do you need

Frequency response & Impedance

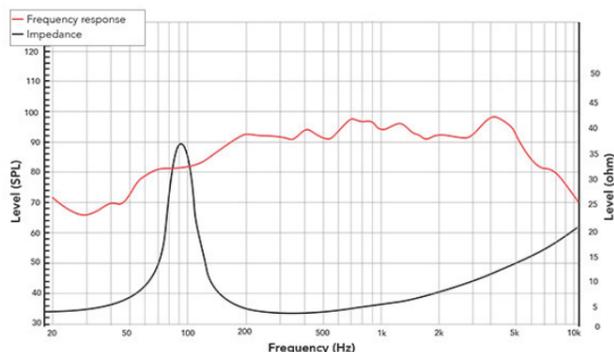

Frequency response measured on IAC baffle

2D drawing

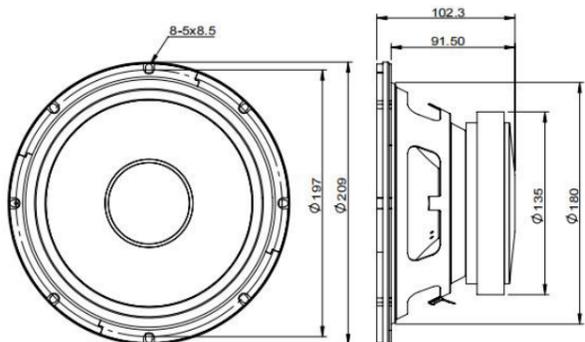

8" | 81FHW

Woofer



Key features:

- GOOD LOW FREQUENCY RESPONSE
- LIGHTWEIGHT SURROUND, STIFF PAPER CONE
- AFFORDABLE WOOFER

Design notes:

The 81FHW woofer was designed with smaller hi-fi subwoofers in mind. The woofer works well in vented enclosures or combined with a passive radiator. Optimized magnetic structure delivers good level of performance and balancing well performance vs cost.


material we use for the surround and guarantees its long lasting performance.

We have chosen lightweight foam surround in this design. Our extensive development and testing of this material yielded in custom formulation of the raw

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 8"	Resonant frequency: 39 Hz	Surround Material: Foam	81FHW-X4 ohm-289
Rated Impedance: 4 ohm	Re: 3.6 ohm	Cone material: Paper	
Power handling	Qes: 0.58	Spider: Nomex	
AES Power: 100 watts	Qms: 5.4	Plate thickness: 6 mm	
Program Power: 200 watts	Qts: 0.52	Peak to peak linear cone displacement: 19 mm	Recone kits:
Peak Power: 400 watts	Vas: 21.5 liters	Overall diameter: 209 mm	RC81FHWX-289
Voice Coil	Sd: 201.1 cm ²	Bolt circle diameter: 197 mm	
Diameter: 1.4 in.	Sensitivity: 86 dB	Baffle cutout dia.: 180 mm	In many cases REDCATT
Winding wire: Copper	Mms: 44 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Aluminum	Bl: 8.25	Depth (flange to rear): 95 mm	16 ohms versions. Indicate
Winding height: 18.2 mm	Le: 1.12 mH	Net weight: 1.7kg	what impedance do you need

Frequency response & Impedance

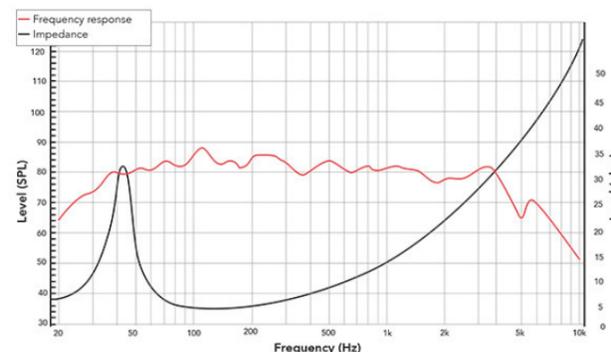

Frequency response measured on IAC baffle

2D drawing

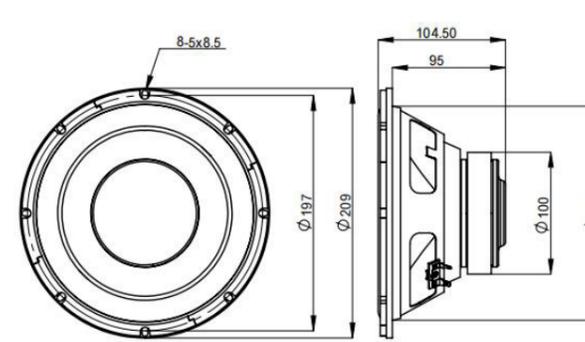

8" | 81NPM

Mid-woofer



Key features:

- EXTENDED FREQUENCY RESPONSE
- 2 DEMODULATION RINGS POWERFUL MOTOR STRUCTURE
- DESIGNED FOR 2-WAY AND MULTI-WAY SPEAKER SYSTEMS

Design notes:

The 81NPM was designed for good reproduction of voice. With an extended low-frequency response, this mid-woofer is highly suitable for two-way and multi-way systems. Its high power handling capabilities extend the ideal usage as a mid-range driver in line-array systems. The 81NPM uses a lightweight half-pressed paper cone reinforced by our proprietary cone treatment, which also works as weatherization protection. The used high-quality

components ensure long-lasting performance even in high powered applications. The chosen material combination provides remarkable strength, high efficiency and sustained output under extreme conditions.


Power Handling
The voice coil sports Kapton former material capable of withstanding peak temperatures above 300°C, well beyond

the thermal requirements of modern audio systems. Former strength provides the ideal transfer of power between the voice coil and the cone assembly and assists in reducing distortion artifacts. By combining this material with state of the art adhesives and our winding voice coil technology, the 81NPM delivers incredibly high performance.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 8"	Resonant frequency: 72 Hz	Surround Material: Fabric	81NPM-X8 ohm-263
Rated Impedance: 8 ohm	Re: 5.2 ohm	Cone material: Paper	
Power handling	Qes: 0.34	Spider: Nomex	
AES Power: 200 watts	Qms: 7.97	Plate thickness: 11 mm	
Program Power: 400 watts	Qts: 0.33	Peak to peak linear cone displacement: 15 mm	Recone kits:
Peak Power: 800 watts	Vas: 10.3 liters	Overall diameter: 210 mm	RC81NPMX-263
Voice Coil	Sd: 219 cm ²	Bolt circle diameter: 195.5 mm	
Diameter: 3 in.	Sensitivity: 93 dB	Baffle cutout dia.: 186.88 mm	In many cases REDCATT
Winding wire: CCAW	Mms: 40.5 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 16.7	Depth (flange to rear): 101.3 mm	16 ohms versions. Indicate
Winding height: 22.5 mm	Le: 0.5 mH	Net weight: 3.2kg	what impedance do you need
			in your request.

Frequency response & Impedance

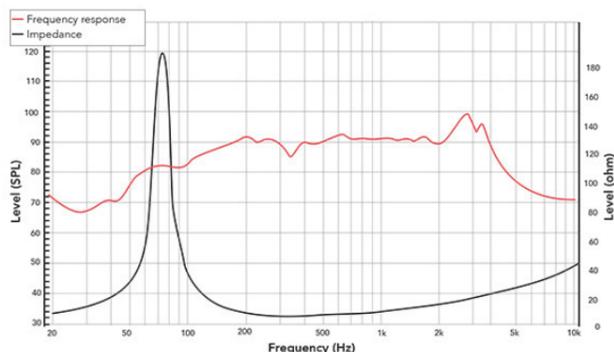

Frequency response measured on IAC baffle

2D drawing

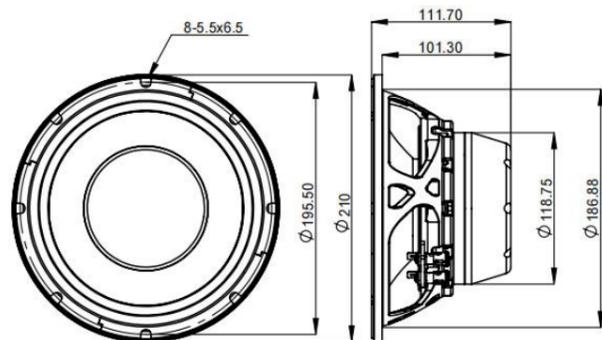

10" | 10NPM

Woofer



Key features:

- HI SENSITIVITY, HI POWER HANDLING
- CARBON FIBER LOADED PAPER CONE, NOMEX SPIDER
- EXCELLENT FREQUENCY RESPONSE

Design notes:

The 10NPM is a high efficiency, (95 dB 1 watt / 1 meter) 10-inch mid bass woofer with incredibly linear frequency response characteristics, extreme high power handling capability while generating low harmonic distortion artifacts. The 10NPM uses a lightweight carbon fiber loaded cone assembly along with a precision double roll constant geometry surround. This combination provides remarkable strength, high efficiency and a excursion

linearity of 15.4mm.


Magnetic Circuit
REDCATT engineers have developed a lightweight, inside-neodymium slug based magnetic circuit capable of delivering the highest level of performance providing a consistent, high integrity magnetic flux gap, ultra low distortion characteristic and high efficiency cooling system. The magnetic circuit design is optimized to generate the

minimum amount of flux modulation, providing exceptional stability.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 10"	Resonant frequency: 58 Hz	Surround Material: Fabric	10NPM-X8 ohm-319
Rated Impedance: 8 ohm	Re: 6.5 ohm	Cone material: Paper	
Power handling	Qes: 0.36	Spider: Nomex	
AES Power: 200 watts	Qms: 4.68	Plate thickness: 11 mm	
Program Power: 400 watts	Qts: 0.33	Peak to peak linear cone displacement: 15.4 mm	Recone kits:
Peak Power: 800 watts	Vas: 29.3 liters	Overall diameter: 262 mm	RC10NPMX-319
Voice Coil	Sd: 363.1 cm ²	Bolt circle diameter: 246 mm	
Diameter: 3 in.	Sensitivity: 95 dB	Baffle cutout dia.: 234 mm	In many cases REDCATT
Winding wire: CCAW	Mms: 47 grams	Number of mounting holes: 4	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 17.9	Depth (flange to rear): 107.8 mm	16 ohms versions. Indicate
Winding height: 23.2 mm	Le: 0.79 mH	Net weight: 3.5kg	what impedance do you need
			in your request.

Frequency response & Impedance

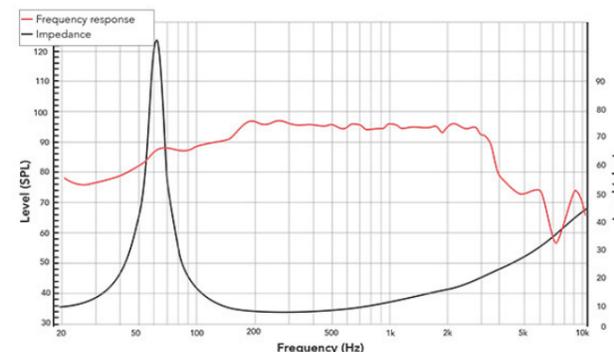

Frequency response measured on IAC baffle

2D drawing

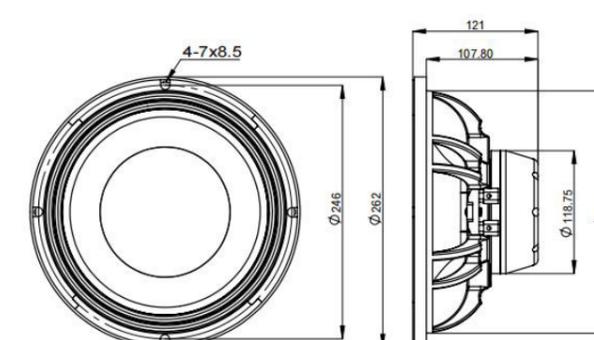

10" 10FIND

Mid-woofer



Key features:

- GLASS FIBER LOADED PAPER CONE
- 2 DEMODULATION RINGS, POWERFUL MOTOR STRUCTURE
- HIGH SPL, LOW THD

Design notes:

The 10FIND is a high efficiency, (96 dB 1watt / 1 meter) 10-inch woofer with linear frequency response characteristics, high power handling capability, while generating ultra low harmonic distortion artifacts. The 10FIND uses a lightweight glass fiber loaded cone assembly along with a high excursion double roll surround. This combination provides a lightweight, yet strong, piston.


Magnetic Circuit
REDCATT engineers have developed a ferrite based magnetic circuit, capable of delivering the highest level of performance, providing a consistent, high integrity magnetic flux gap, ultra low distortion characteristic and high efficiency cooling system. The magnetic structure has integrated two aluminum shorting rings. The magnetic circuit design is optimized to generate the

minimum amount of flux modulation, providing exceptional stability.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 10"	Resonant frequency: 66 Hz	Surround Material: Fabric	10FIND-X8 ohm-033
Rated Impedance: 8 ohm	Re: 5.5 ohm	Cone material: Paper	
Power handling	Qes: 0.41	Spider: Nomex	
AES Power: 250 watts	Qms: 13.13	Plate thickness: 8 mm	
Program Power: 500 watts	Qts: 0.39	Peak to peak linear cone displacement: 15.4 mm	Recone kits:
Peak Power: 1000 watts	Vas: 23.5 liters	Overall diameter: 262 mm	RC10FINDX-033
Voice Coil	Sd: 346 cm ²	Bolt circle diameter: 246 mm	
Diameter: 2.5 in.	Sensitivity: 96 dB	Baffle cutout dia.: 230 mm	In many cases REDCATT
Winding wire: CCAW	Mms: 41.3 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 15.5	Depth (flange to rear): 108.5 mm	16 ohms versions. Indicate
Winding height: 13.5 mm	Le: 0.68 mH	Net weight: 4.55kg	what impedance do you need
			in your request.

Frequency response & Impedance

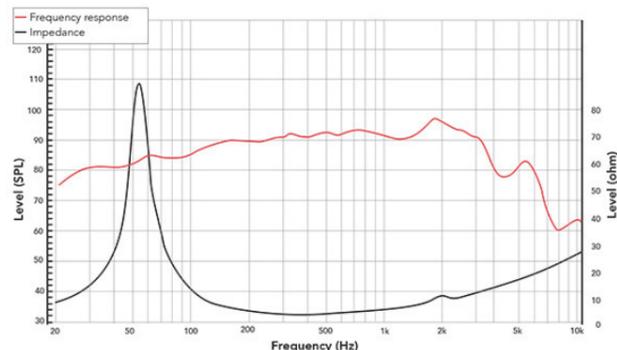

Frequency response measured on IAC baffle

2D drawing

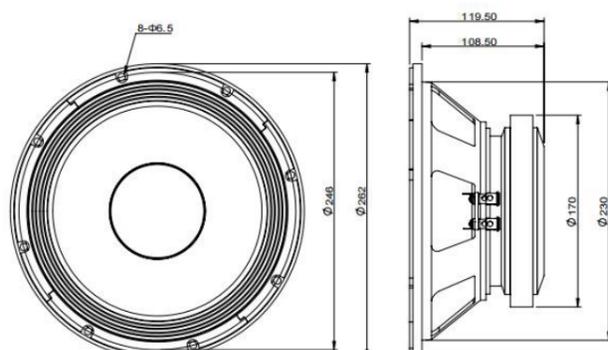

10" 10FHW

Sub-woofer



Key features:

- GOOD LOW FREQUENCY EXTENSION
- ALUMINUM CHASSIS, ALUMINUM CONE, NOMEX SPIDER WITH ATTACHED TINSEL WIRE
- HIGH POWER HANDLING

Design notes:

The 10FHW is a high efficiency, (87dB 1watt / 1 meter) 10-inch sub-woofer speaker with extended low frequency response and high power handling capability. The 10FHW uses a strong anodized aluminum cone assembly along with a single roll rubber surround. Spider is Nomex material with stitched-on tinsel wires. This ensures long lasting performance even in high powered applications. The chosen material combination provides remarkable strength,

high efficiency and sustained output under extreme conditions.


Magnetic Circuit
REDCATT engineers have developed a ferrite based magnetic circuit, capable of delivering the highest level of performance, providing a consistent, high integrity magnetic flux gap, ultra low distortion characteristic and high efficiency cooling system. The magnetic structure has integrated two

aluminum shorting rings. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 10"	Resonant frequency: 25 Hz	Surround Material: Rubber	10FHW-X4 ohm-117
Rated Impedance: 4 ohm	Re: 3.6 ohm	Cone material: Aluminum	
Power handling	Qes: 0.4	Spider: Nomex	
AES Power: 200 watts	Qms: 13.72	Plate thickness: 8 mm	
Program Power: 400 watts	Qts: 0.39	Peak to peak linear cone displacement: 29.4 mm	Recone kits:
Peak Power: 800 watts	Vas: 57.9 liters	Overall diameter: 269 mm	RC10FHWX-117
Voice Coil	Sd: 330.1 cm ²	Bolt circle diameter: 258 mm	
Diameter: 2 in.	Sensitivity: 87 dB	Baffle cutout dia.: 239 mm	In many cases REDCATT
Winding wire: Copper	Mms: 110.4 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 12.7	Depth (flange to rear): 117 mm	16 ohms versions. Indicate
Winding height: 32.3 mm	Le: 0.62 mH	Net weight: 6kg	what impedance do you need
			in your request.

Frequency response & Impedance

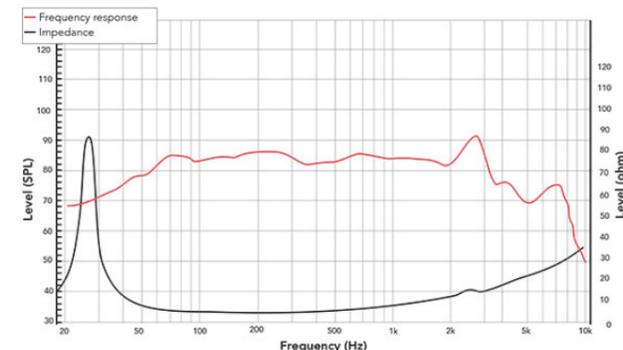

Frequency response measured on IAC baffle

2D drawing

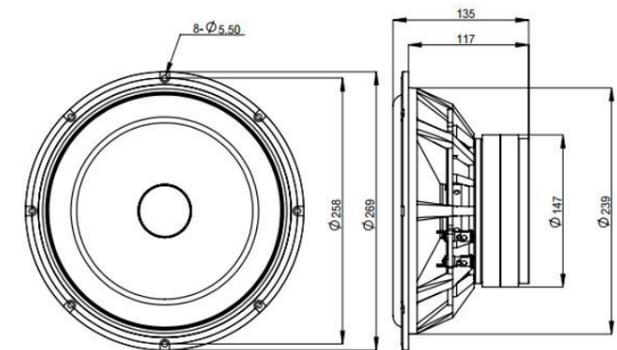

10" 101NPM

Mid-woofer



Key features:

- ULTRA LIGHTWEIGHT, DESIGNED FOR PORTABLE PRODUCTS
- HIGH EFFICIENCY, LOW HARMONIC DISTORTION
- CARBON FIBER LOADED PAPER CONE

Design notes:

The 101NPM is a high efficiency, (95 dB 1watt / 1 meter) 10-inch mid-woofer with incredibly linear frequency response characteristics, high power handling capability, while generating ultra low harmonic distortion artifacts. The 101NPM uses a lightweight glass fiber loaded cone assembly along with a high excursion triple roll surround. This combination provides a lightweight, yet strong, piston, high efficiency and a peak to peak maximum excursion

of 13.6.


Magnetic Circuit
REDCATT engineers have developed an ultra lightweight, inside neodymium slug based magnetic circuit, capable of delivering the highest level of performance, providing a consistent, high integrity magnetic flux gap, ultra low distortion characteristic and high efficiency cooling system. The magnetic structure has integrated two alu-

minum shorting rings. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 10"	Resonant frequency: 53 Hz	Surround Material: Fabric	101NPM-X8 ohm-119
Rated Impedance: 8 ohm	Re: 5.0 ohm	Cone material: Paper	
Power handling	Qes: 0.61	Spider: Nomex	
AES Power: 150 watts	Qms: 5.51	Plate thickness: 8 mm	
Program Power: 300 watts	Qts: 0.55	Peak to peak linear cone displacement: 13.6 mm	Recone kits:
Peak Power: 600 watts	Vas: 49.7 liters	Overall diameter: 262 mm	RC101NPMX-119
Voice Coil	Sd: 363 cm ²	Bolt circle diameter: 246 mm	
Diameter: 2 in.	Sensitivity: 95 dB	Baffle cutout dia.: 230 mm	In many cases REDCATT
Winding wire: CCAR	Mms: 32.6 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 9.6	Depth (flange to rear): 111.5 mm	16 ohms versions. Indicate
Winding height: 14.5 mm	Le: 0.53 mH	Net weight: 1.97kg	what impedance do you need
			in your request.

Frequency response & Impedance

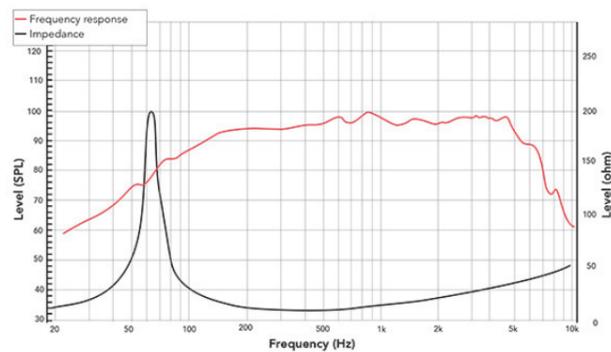

Frequency response measured on IAC baffle

2D drawing

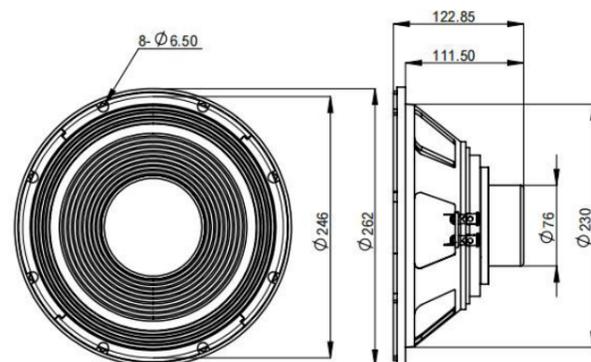

10" 101FW

Sub-woofer



Key features:

- GLASS FIBER LOADED PAPER CONE AND DUST-CAP
- NOMEX SPIDER WITH STITCHED TINSEL WIRES
- EXCELLENT LOW FREQUENCY RESPONSE

Design notes:

The 101FW is a high efficiency, (87dB 1watt / 1 meter) 10-inch woofer speaker with extended low frequency response and high power handling capability. The 101FW uses a strong glass fiber reinforced paper cone assembly along with a single roll rubber surround. Spider is Nomex material with stitched-in tinsel wires. This ensures long lasting performance even in high powered applications. The chosen material combination provides remarkable


strength, high efficiency and sustained output under extreme conditions.

The 101FW cone and dust cap are made using glass fiber loaded paper pulp. All „Äúsoft,Äù parts are bonded together using state of the art high temperature adhesives. Metal parts in the speaker assembly are coated for extreme weatherization protection. Speaker push terminals are gold plated to ensure the best connection.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 10"	Resonant frequency: 27 Hz	Surround Material: Rubber	101FW-X4 ohm-118
Rated Impedance: 4 ohm	Re: 3.6 ohm	Cone material: Paper	
Power handling	Qes: 0.37	Spider: Nomex	
AES Power: 200 watts	Qms: 1.5	Plate thickness: 8 mm	
Program Power: 400 watts	Qts: 0.3	Peak to peak linear cone displacement: 22.6 mm	Recone kits:
Peak Power: 800 watts	Vas: 54.7 liters	Overall diameter: 269 mm	RC101FWX-118
Voice Coil	Sd: 330.1 cm ²	Bolt circle diameter: 258 mm	
Diameter: 2 in.	Sensitivity: 87 dB	Baffle cutout dia.: 239 mm	In many cases REDCATT
Winding wire: Copper	Mms: 97.8 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Aluminum	Bl: 12.7	Depth (flange to rear): 117 mm	16 ohms versions. Indicate
Winding height: 32.3 mm	Le: 0.82 mH	Net weight: 6kg	what impedance do you need
			in your request.

Frequency response & Impedance

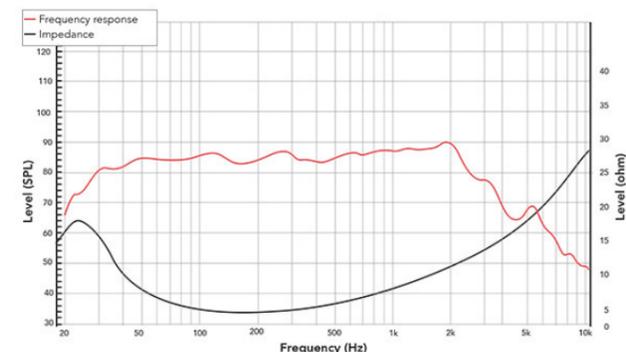

Frequency response measured on IAC baffle

2D drawing

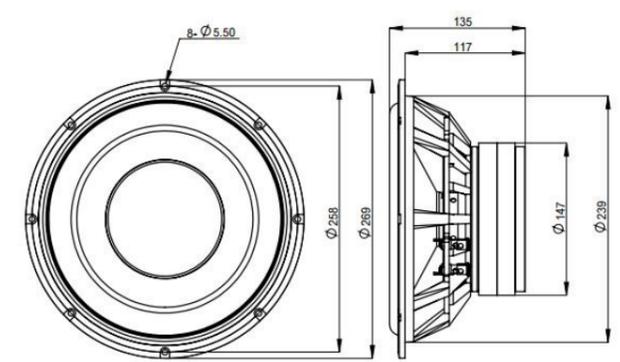

10" 101FHW

Sub-woofer



Key features:

- FIBER REINFORCED PAPER CONE
- TWO DEMODULATION RINGS
- OPTIMIZED AIR VENTILATION

Design notes:

Introducing the 101FHW: the latest iteration of our award-winning 10FHW woofer model. This high-efficiency 10-inch subwoofer delivers an impressive 87dB sensitivity (1 watt / 1 meter), offering extended low-frequency response and robust power handling capabilities.

Crafted with a fiber-reinforced paper cone assembly and a single roll rubber surround, the 101FHW is built for durability and

performance. Its Nomex spider, featuring stitched tinsel wires, ensures long-lasting reliability even in high-powered applications. Enhanced back plate space and additional venting have been integrated to optimize power handling and cooling, making this woofer truly exceptional.


The carefully selected materials provide remarkable strength, high efficiency, and sustained output under extreme conditions.

On the magnetic front, our REDCATT engineers have designed a cutting-edge ferrite-based magnetic circuit that sets a new standard for performance. This innovative design features a consistent, high-integrity magnetic flux gap, ultra-low distortion characteristics, and an efficient cooling system. With integrated aluminum shorting rings, the magnetic circuit minimizes flux modulation, ensuring exceptional stability

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 10"	Resonant frequency: 25 Hz	Surround Material: Rubber	101FHW-X8 ohm-118D
Rated Impedance: 8 ohm	Re: 5.8 ohm	Cone material: Paper	
Power handling	Qes: 0.43	Spider: Nomex	
AES Power: 200 watts	Qms: 1.76	Plate thickness: 8 mm	
Program Power: 400 watts	Qts: 0.34	Peak to peak linear cone displacement: 27.6 mm	Recone kits:
Peak Power: 800 watts	Vas: 73.3 liters	Overall diameter: 269 mm	RC101FHWX-118D
Voice Coil	Sd: 363 cm ²	Bolt circle diameter: 257 mm	
Diameter: 2 in.	Sensitivity: 87 dB	Baffle cutout dia.: 238 mm	In many cases REDCATT
Winding wire: Copper	Mms: 100.2 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Aluminum	Bl: 14.6	Depth (flange to rear): 123 mm	16 ohms versions. Indicate
Winding height: 32.3 mm	Le: 0.63 mH	Net weight: 6kg	what impedance do you need
			in your request.

Frequency response & Impedance

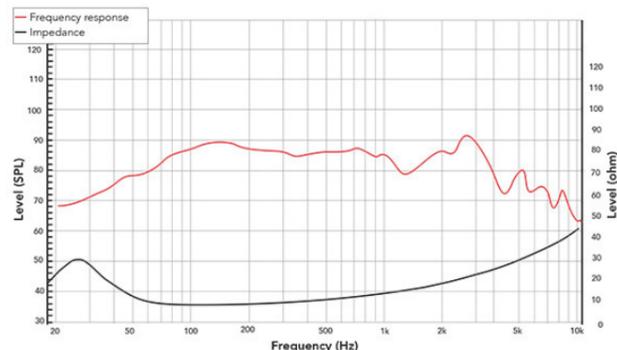

Frequency response measured on IAC baffle

2D drawing

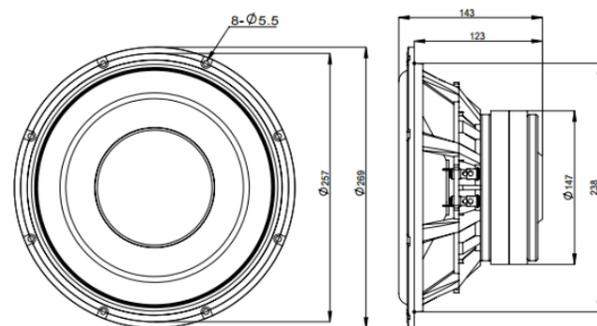

10" 10FHW

Sub-woofer



Key features:

- ANODIZED ALUMINUM CONE
- TWO DEMODULATION RINGS
- OPTIMIZED AIR VENTILATION

Design notes:

Introducing the 10FHW: the latest evolution of our acclaimed 10FHW woofer model. This high-efficiency 10-inch subwoofer boasts an impressive 86dB sensitivity (1 watt / 1 meter), delivering extended low-frequency response and exceptional power handling capabilities.

Crafted with a robust anodized aluminum cone assembly and a single roll rubber surround, the 101FHW is designed for

durability and performance. Its Nomex spider, complete with stitched tinsel wires, ensures longevity even in high-powered scenarios. Enhanced back plate space and additional venting optimize power handling and cooling, making this woofer a standout in its class.

Our innovative material selection guarantees remarkable strength, high efficiency, and sustained output under the most


demanding conditions.

On the magnetic front, REDCATT engineers have developed a cutting-edge ferrite-based magnetic circuit that elevates performance to new heights. This design features a consistent, high-integrity magnetic flux gap, ultra-low distortion characteristics, and an efficient cooling system. With integrated aluminum shorting rings, our optimized magnetic circuit minimizes flux

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 10"	Resonant frequency: 24 Hz	Surround Material: Rubber	10FHW-X8 ohm-117D
Rated Impedance: 8 ohm	Re: 5.7 ohm	Cone material: Aluminum	
Power handling	Qes: 0.45	Spider: Nomex	
AES Power: 200 watts	Qms: 2.37	Plate thickness: 8 mm	
Program Power: 400 watts	Qts: 0.37	Peak to peak linear cone displacement: 27 mm	Recone kits:
Peak Power: 800 watts	Vas: 65.9 liters	Overall diameter: 269 mm	RC10FHWX-117D
Voice Coil	Sd: 346 cm ²	Bolt circle diameter: 257 mm	
Diameter: 2 in.	Sensitivity: 86 dB	Baffle cutout dia.: 238 mm	In many cases REDCATT
Winding wire: Copper	Mms: 113.4 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Aluminum	Bl: 14.7	Depth (flange to rear): 123 mm	16 ohms versions. Indicate
Winding height: 32.3 mm	Le: 0.58 mH	Net weight: 6kg	what impedance do you need
			in your request.

Frequency response & Impedance

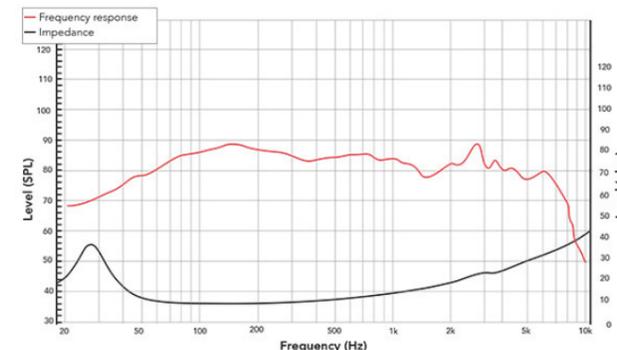

Frequency response measured on IAC baffle

2D drawing

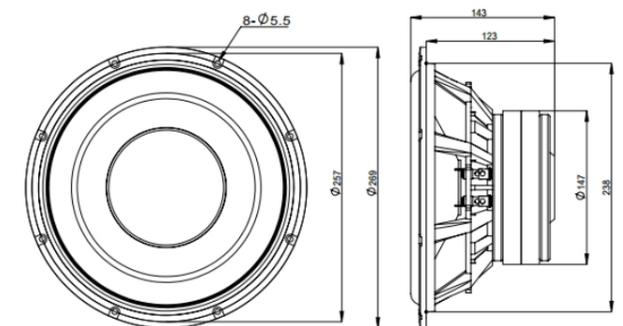

12" Twiggy 12

Woofer



Key features:

- SHALLOW, YET HIGH CONE EXCURSION
- HONEYCOMB CONE
- IDEAL FOR 4X4" WALL SUBWOOFER, CAR UNDERSEAT SUBWOOFERS

Design notes:

The ultimate in shallow depth woofer design! We created this powerhouse of a speaker with limited spaces in mind, allowing you to fit it into the most compact areas while still delivering massive low frequencies. The extreme shallowness of the Twiggy 12 opens up a world of possibilities, allowing designers to craft enclosures that seamlessly integrate into typical 4x4" wall structures, under vehicle seats, beneath sofas, and more.


But don't be fooled by its shallow design, as the cone excursion approaches an impressive 22.4mm peak to peak, ensuring that this woofer will deliver sizable amounts of low frequencies without compromising on performance. The cone is constructed with a honeycomb structure and layers of woven glass fibers, adding not only to its strength but also to the overall rigidity and performance. Our patented design guarantees that the

depth versus cone excursion ratio is the best available in the market, ensuring optimal sound quality in any installation. The unique magnetic structure of the Twiggy 12 delivers a high-strength B field with minimal distortion artifacts, further enhancing the audio experience. To top it off, this little powerhouse can handle up to 800 watts of peak power amplification, making it the go-to choice for delivering excellent sound experience.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 12"	Resonant frequency: 30 Hz	Surround Material: Rubber	Twiggy 12-X4 ohm-470A
Rated Impedance: 4 ohm	Re: 3.6 ohm	Cone material: GF Honey-	
	Qes: 1.16	Spider: Nomex	
Power handling	Qms: 16	Plate thickness: 8 mm	
AES Power: 200 watts	Qts: 1.08	Peak to peak linear cone displacement: 22.4 mm	Recone kits:
Program Power: 400 watts	Vas: 59.8 liters	Overall diameter: 323 mm	RCTwiggy 12X-470A
Peak Power: 800 watts	Sd: 506.7 cm ²	Bolt circle diameter: 305 mm	
Voice Coil	Sensitivity: 84 dB	Baffle cutout dia.: 293.5 mm	In many cases REDCATT
Diameter: 3 in.	Mms: 160.7 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Winding wire: CCAW	Bl: 9.9	Depth (flange to rear): 73.7 mm	16 ohms versions. Indicate
Former: Glass Fiber	Le: 1 mH	Net weight: 5.1kg	what impedance do you need
Winding height: 26.5 mm			in your request.

Frequency response & Impedance

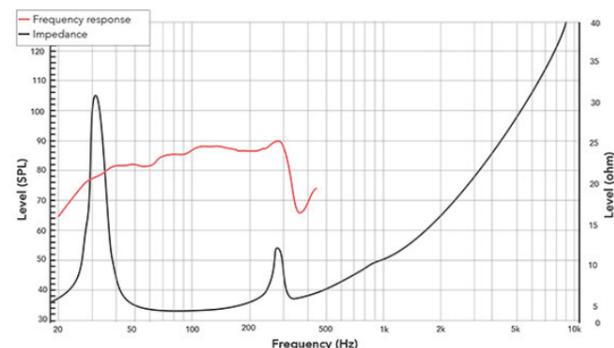

Frequency response measured on IAC baffle

2D drawing

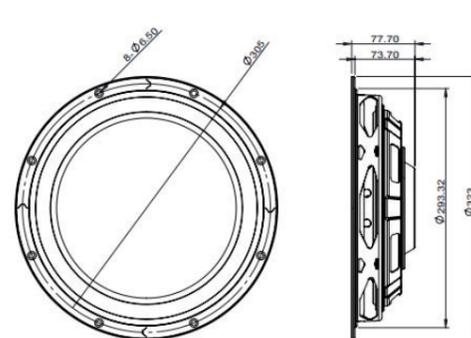

12" 12XR

Woofer



Key features:

- VERY HIGH CONE EXCURSION, WITH VERY LOW THD
- CAPABLE TO HANDLE VERY LOW FREQUENCIES
- HIGH POWER HANDLING, COPPER CAP, STITCHED TINSEL WIRES

Design notes:

The 12XR was designed around our new approach to the magnetic system. Our XR series speaker motors were designed so the voice coil winding doesn't leave the gap for most of the cone excursion. The desired cone excursion is carefully evaluated and incorporated into the design. The 12XR allows the designer to design sub-woofers with very large cone excursions, without the otherwise present harmonic distortion due to the voice coil

leaving the magnetic gap. If you like the sound of a clean, undistorted bass, then the 12XR is the right transducer for your application.

Motor Design
The magnetic design incorporates large neodymium magnets placed along the voice coil winding. This has allowed us to push the cone excursion to 28mm peak to peak. Unique gap venting ensures good air circu-


lation and greatly improves the reliability of this driver. We have also developed a new technique for manufacturing deep copper caps.

The design further sports a large spider on top of which is hot-pressed tinsel wires. Cone is carbon fiber reinforced, with a lightweight foamed rubber surround. The suspension was designed for large excursions.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 12"	Resonant frequency: 35 Hz	Surround Material: Rubber	12XR-X8 ohm-270
Rated Impedance: 8 ohm	Re: 5.7 ohm	Cone material: Paper	
	Qes: 0.73	Spider: Nomex	
Power handling	Qms: 10.5	Plate thickness: 31 mm	
AES Power: 500 watts	Qts: 0.68	Peak to peak linear cone displacement: 28.2 mm	Recone kits:
Program Power: 1000 watts	Vas: 89.7 liters	Overall diameter: 320 mm	RC12XR-X8-270
Peak Power: 2000 watts	Sd: 531 cm ²	Bolt circle diameter: 299 mm	
Voice Coil	Sensitivity: 91 dB	Baffle cutout dia.: 281 mm	In many cases REDCATT
Diameter: 2.5 in.	Mms: 88.3 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Winding wire: Copper	Bl: 12.3	Depth (flange to rear): 172.5 mm	16 ohms versions. Indicate
Former: Glass Fiber	Le: 0.24 mH	Net weight: 5.7kg	what impedance do you need
Winding height: 12.6 mm			in your request.

Frequency response & Impedance

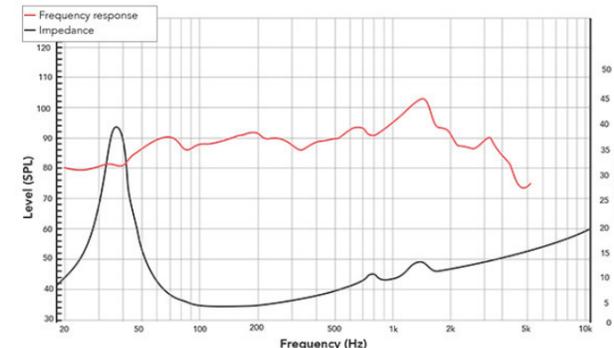

Frequency response measured on IAC baffle

2D drawing

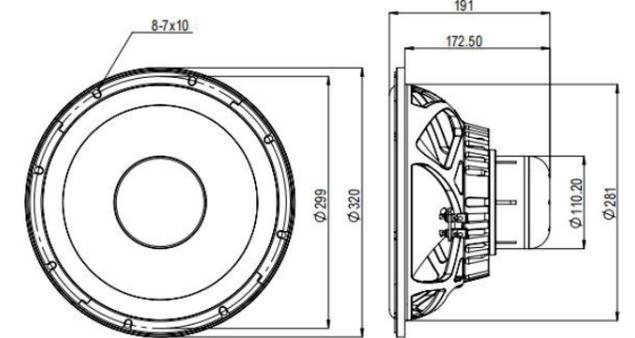

12" 12NPM

Mid-woofer



Key features:

- CARBON FIBER LOADED PAPER CONE
- VERY HIGH EFFICIENCY
- LIGHTWEIGHT MECHANICAL STRUCTURE

Design notes:

The 12NPM is a high efficiency, (98 dB 1watt / 1 meter) 12-inch mid bass woofer with incredibly linear frequency response characteristics, extreme high power handling capability while generating low harmonic distortion artifacts. The 12NPM uses a lightweight carbon fiber loaded cone assembly along with a precision double roll constant geometry surround. This combination provides remarkable strength, high efficiency and an excursion

linearity of 18.2mm.

Magnetic Circuit
REDCATT engineers have developed a lightweight, inside-neodymium slug based magnetic circuit capable of delivering the highest level of performance providing a consistent, high integrity magnetic flux gap, ultra low distortion characteristic and high efficiency cooling system. The magnetic circuit design is optimized to generate the

minimum amount of flux modulation, providing exceptional stability.

Specifications:

General specs	T/S Parameters
Nominal Diameter: 12"	Resonant frequency: 49 Hz
Rated Impedance: 8 ohm	Re: 4.7 ohm
Power handling	Qes: 0.32
AES Power: 450 watts	Qms: 9.95
Program Power: 900 watts	Qts: 0.31
Peak Power: 1800 watts	Vas: 63.6 liters
Voice Coil	Sd: 531 cm ²
Diameter: 3 in.	Sensitivity: 98 dB
Winding wire: CCAW	Mms: 65.6 grams
Former: Glass Fiber	Bl: 17.3
Winding height: 18.6 mm	Le: 0.65 mH


Design details
Surround Material: Fabric
Cone material: Paper
Spider: Nomex
Plate thickness: 11 mm
Peak to peak linear cone displacement: 18.2 mm
Overall diameter: 315 mm
Bolt circle diameter: 298 mm
Baffle cutout dia.: 285 mm
Number of mounting holes: 8
Depth (flange to rear): 142.5 mm
Net weight: 4.1kg

Ordering codes:
12NPM-X8 ohm-054

Recone kits:
RC12NPMX-054


In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

Frequency response & Impedance

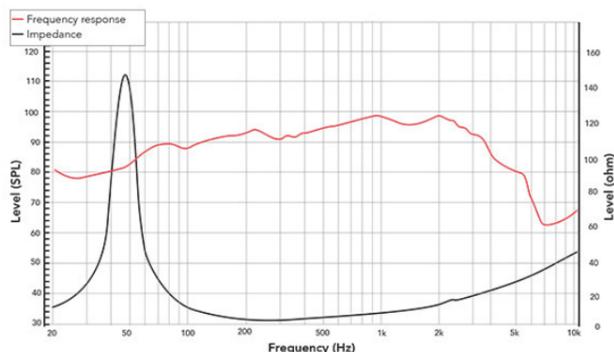

Frequency response measured on IAC baffle

2D drawing

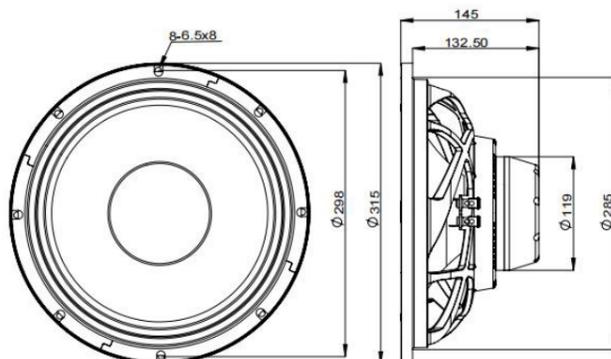

12" 123NPM

Mid-woofer



Key features:

- HIGH SENSITIVITY, EXTENDED FREQUENCY RESPONSE
- 3 DEMODULATION RINGS, POWERFUL MOTOR STRUCTURE, DUAL AIR-GAP
- HIGH POWER HANDLING

Design notes:

The 123NPM is a truly unique full range woofer. We have designed cutting edge product, using the best available materials and highly optimized design for the best performance in its class. It delivers very high efficiency, (96 dB 1watt / 1 meter), incredibly linear frequency response characteristics with extended HF frequency response, extreme high power handling capability, while generating ultra low harmonic distortion artifacts. The 123NPM

uses a lightweight carbon fiber loaded cone assembly along with a high excursion triple roll constant geometry surround. This combination provides remarkable strength, high efficiency and a peak to peak linear excursion of 21mm.

Magnetic Circuit
The magnetic circuit features two aluminum shorting rings, double air-gap front plate. The cooling system and the air flow

has been designed using the modern FEM techniques and further optimized to provide the highest levels of cooling efficiency. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability.

Specifications:

General specs	T/S Parameters
Nominal Diameter: 12"	Resonant frequency: 58 Hz
Rated Impedance: 8 ohm	Re: 4.7 ohm
Power handling	Qes: 0.45
AES Power: 800 watts	Qms: 12.6
Program Power: 1600 watts	Qts: 0.43
Peak Power: 3200 watts	Vas: 31.6 liters
Voice Coil	Sd: 551 cm ²
Diameter: 4 in.	Sensitivity: 96 dB
Winding wire: Aluminum Sq.	Mms: 100 grams
Former: TIL	Bl: 19.6
Winding height: 23 mm	Le: 0.71 mH


Design details
Surround Material: Fabric
Cone material: Paper
Spider: Nomex
Plate thickness: 13 mm
Peak to peak linear cone displacement: 21.2 mm
Overall diameter: 320.35 mm
Bolt circle diameter: 299 mm
Baffle cutout dia.: 281.9 mm
Number of mounting holes: 8
Depth (flange to rear): 140.5 mm
Net weight: 6.2kg

Ordering codes:
123NPM-X8 ohm-185

Recone kits:
RC123NPMX-185


In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

Frequency response & Impedance

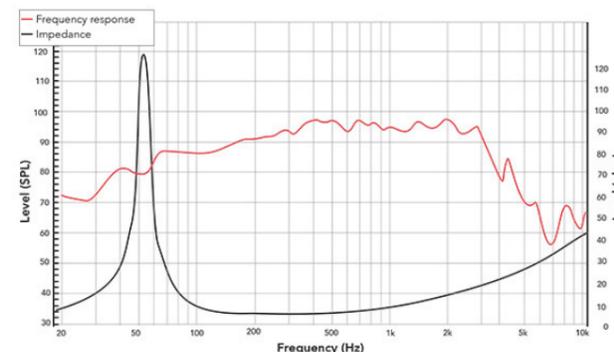

Frequency response measured on IAC baffle

2D drawing

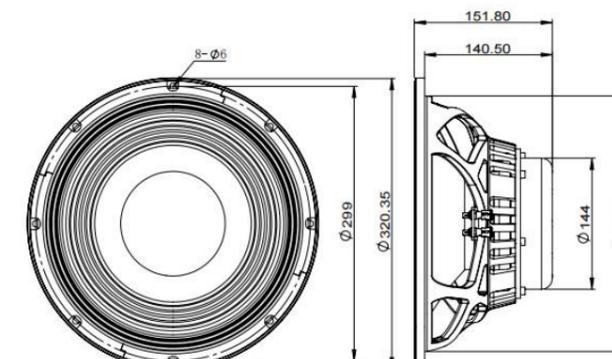

12" 123FPM

Mid-woofer



Key features:

- EXTENDED FREQUENCY RESPONSE
- RIB REINFORCED PAPER CONE
- HIGH POWER HANDLING

Design notes:


The 123FPM is a high efficiency, (98 dB 1watt / 1 meter) 12-inch mid bass woofer with incredibly linear frequency response characteristics. The 123FPM uses a lightweight rib-reinforced cone assembly along with a precision double roll constant geometry surround. This combination provides remarkable strength, high efficiency and an excursion linearity of 10.2mm.

Magnetic Circuit
REDCATT engineers have developed a lightweight, inside-neodymium slug based magnetic circuit capable of delivering the highest level of performance providing a consistent, high integrity magnetic flux gap, ultra low distortion characteristic and high efficiency cooling system. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 12"	Resonant frequency: 45 Hz	Surround Material: Fabric	123FPM-X4 ohm-188B
Rated Impedance: 4 ohm	Re: 3.1 ohm	Cone material: Paper	
Power handling	Qes: 0.29	Spider: Nomex	
AES Power: 300 watts	Qms: 4.96	Plate thickness: 8 mm	
Program Power: 600 watts	Qts: 0.27	Peak to peak linear cone displacement: 10.2 mm	Recone kits:
Peak Power: 1200 watts	Vas: 98.5 liters	Overall diameter: 320 mm	RC123FPMX-188B
Voice Coil	Sd: 531 cm ²	Bolt circle diameter: 302 mm	
Diameter: 2.5 in.	Sensitivity: 98 dB	Baffle cutout dia.: 282 mm	In many cases REDCATT
Winding wire: CCAW	Mms: 52.1 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 12.8	Depth (flange to rear): 127.8 mm	16 ohms versions. Indicate
Winding height: 13.5 mm	Le: 0.42 mH	Net weight: 5kg	what impedance do you need
			in your request.

Frequency response & Impedance

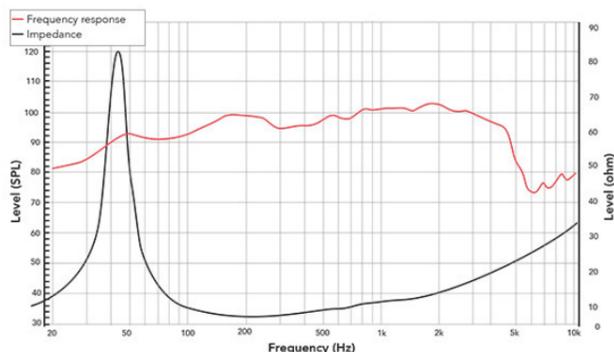

Frequency response measured on IAC baffle

2D drawing

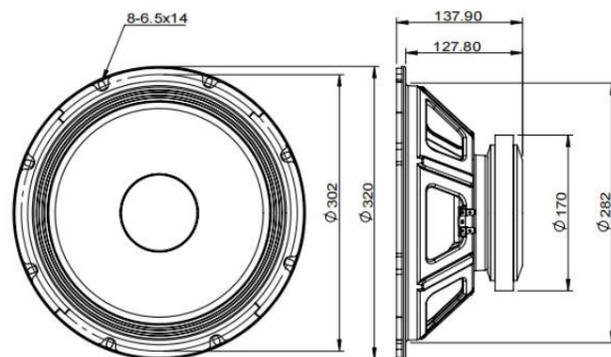

12" 122NPW

Woofer



Key features:

- CARBON FIBER FILLED PAPER CONE
- DOUBLE SILICONE SPIDER
- HIGH POWER HANDLING

Design notes:

The 122NPW is a high efficiency, (97 dB 1watt / 1 meter) 12-inch woofer with incredibly linear frequency response characteristics, extreme high power handling capability while generating low harmonic distortion artifacts. The 122NPW uses a lightweight carbon fiber loaded cone assembly along with a high excursion triple roll constant geometry surround. This combination provides remarkable strength, high efficiency and a peak to peak maxi-

mum excursion of 19mm. Woofer features REDCATT double silicone sealed spider.

Power Handling
At the core of the 122NPW is it, Åôs voice coil technology featuring a composite Polyimide former material capable of withstanding peak temperatures in excess of 350degC, well beyond the thermal requirements of modern professional audio systems.


The woofer cone is also extensive-

ly treated to withstand harsh environments and high humidity. Metal parts in the speaker assembly are coated for extreme weatherization protection.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 12"	Resonant frequency: 35 Hz	Surround Material: Fabric	122NPW-X8 ohm-102
Rated Impedance: 8 ohm	Re: 5.5 ohm	Cone material: Paper	
Power handling	Qes: 0.17	Spider: Nomex	
AES Power: 800 watts	Qms: 6.65	Plate thickness: 14 mm	
Program Power: 1600 watts	Qts: 0.17	Peak to peak linear cone displacement: 19.2 mm	Recone kits:
Peak Power: 3200 watts	Vas: 81.9 liters	Overall diameter: 322 mm	RC122NPWX-102
Voice Coil	Sd: 551 cm ²	Bolt circle diameter: 302 mm	
Diameter: 4 in.	Sensitivity: 97 dB	Baffle cutout dia.: 287 mm	In many cases REDCATT
Winding wire: Copper	Mms: 81.9 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 27	Depth (flange to rear): 154 mm	16 ohms versions. Indicate
Winding height: 25.5 mm	Le: 1.27 mH	Net weight: 7.6kg	what impedance do you need
			in your request.

Frequency response & Impedance

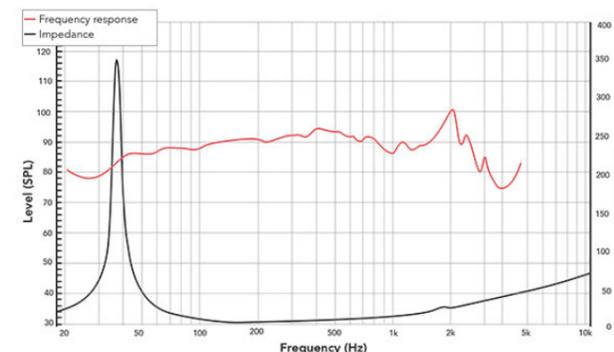

Frequency response measured on IAC baffle

2D drawing

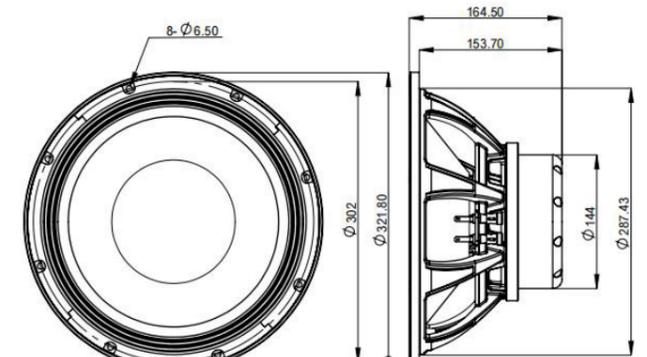

12" 121XR

Woofer



Key features:

- EXTENDED FREQUENCY RESPONSE, HIGH EXCURSION, ULTRA LOW THD
- STATIC DEMODULATION COIL, LARGE SPIDER WITH STITCHED TINSEL WIRES
- CARBON FIBER LOADED PAPER CONE

Design notes:

The 121XR was designed to be simply the best driver for 2-way and multi-way systems on the market, yet this driver will also shine in sub-woofer applications. The combination of our XR patented technology with static shorting coil brings an unparalleled opportunity to the audio designers. The common request for 2-way speakers is ,Áúmore of everything,Áù. Designers wishes for more bass, more mids. Well, there you have it! But not only that.

We bring this with clarity in the mid-frequencies and undistorted bass. Our designers were able to achieve THD below 0.5% from 20Hz up to 2.5kHz. There isn't another driver like this on the market.


Motor Design
The magnetic design incorporates large neodymium magnets placed along the voice coil winding, together with the 2nd and static coil placed on the pole piece. This

has allowed us to push the cone excursion to 25mm peak to peak, while lowering the inductance. The shorting coil covers the complete main coil excursion. This is also an improvement compared to some previous designs on the market. Unique gap venting ensures good air circulation and greatly improves the reliability of this driver.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 12"	Resonant frequency: 46 Hz	Surround Material: Fabric	121XR-X8 ohm-352
Rated Impedance: 8 ohm	Re: 5.6 ohm	Cone material: Paper	
Power handling	Qes: 0.42	Spider: Nomex	
AES Power: 500 watts	Qms: 1.56	Plate thickness: 31 mm	
Program Power: 1000 watts	Qts: 0.33	Peak to peak linear cone displacement: 25.4 mm	Recone kits:
Peak Power: 2000 watts	Vas: 69.1 liters	Overall diameter: 320 mm	RC121XRX-352
Voice Coil	Sd: 531 cm ²	Bolt circle diameter: 299 mm	
Diameter: 2.5 in.	Sensitivity: 96 dB	Baffle cutout dia.: 281 mm	In many cases REDCATT
Winding wire: Copper	Mms: 66.8 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 16	Depth (flange to rear): 172.5 mm	16 ohms versions. Indicate
Winding height: 18.3 mm	Le: 0.16 mH	Net weight: 5.1kg	what impedance do you need
			in your request.

Frequency response & Impedance

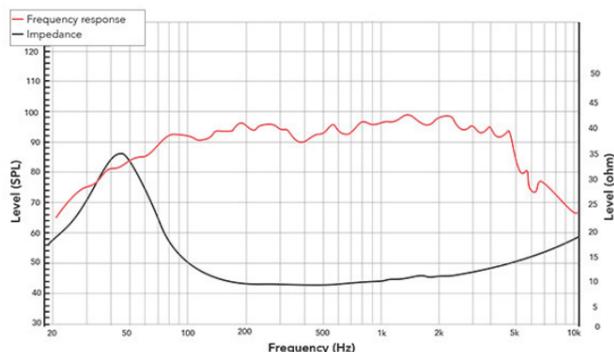

Frequency response measured on IAC baffle

2D drawing

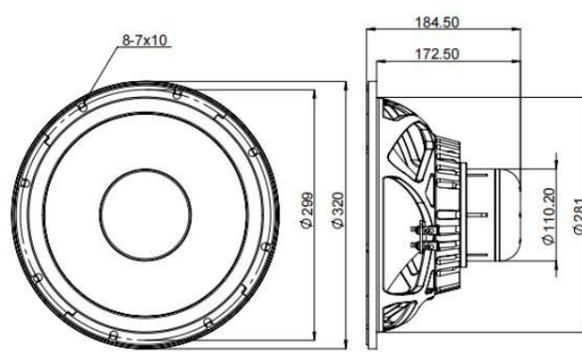

12" 121NPM

Mid-woofer



Key features:

- VERY HIGH EFFICIENCY MID-WOOFER
- LINEAR FREQUENCY RESPONSE, LOW HARMONIC DISTORTION
- LIGHTWEIGHT CARBON FIBER LOADED PAPER CONE, NOMEX SPIDER

Design notes:

The 121NPM is an ultra high efficiency, (100dB 1watt / 1 meter) 12-inch mid bass woofer with incredibly linear frequency response characteristics, extreme high power handling capability while generating low harmonic distortion artifacts. The 121NPM uses a lightweight carbon fiber loaded cone assembly along with a precision double roll constant geometry surround. This combination provides remarkable strength, high efficiency and a

excursion linearity of 14.2mm.


Magnetic Circuit
REDCATT engineers have developed a lightweight, neodymium outside ring based magnetic circuit capable of delivering the highest level of performance providing a consistent, high integrity magnetic flux gap, ultra low distortion characteristic and high efficiency cooling system. The magnetic circuit design is optimized to generate the

minimum amount of flux modulation, providing exceptional stability.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 12"	Resonant frequency: 50 Hz	Surround Material: Fabric	121NPM-X8 ohm-079
Rated Impedance: 8 ohm	Re: 6.0 ohm	Cone material: Paper	
Power handling	Qes: 0.16	Spider: Nomex	
AES Power: 450 watts	Qms: 7.51	Plate thickness: 10 mm	
Program Power: 900 watts	Qts: 0.16	Peak to peak linear cone displacement: 14.2 mm	Recone kits:
Peak Power: 1800 watts	Vas: 59.2 liters	Overall diameter: 315 mm	RC121NPMX-079
Voice Coil	Sd: 531 cm ²	Bolt circle diameter: 298 mm	
Diameter: 3 in.	Sensitivity: 100 dB	Baffle cutout dia.: 285 mm	In many cases REDCATT
Winding wire: CCAW	Mms: 66.7 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 27.8	Depth (flange to rear): 123.5 mm	16 ohms versions. Indicate
Winding height: 13 mm	Le: 0.51 mH	Net weight: 4kg	what impedance do you need
			in your request.

Frequency response & Impedance

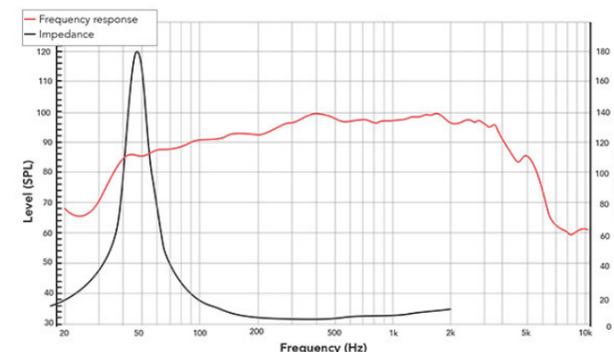

Frequency response measured on IAC baffle

2D drawing

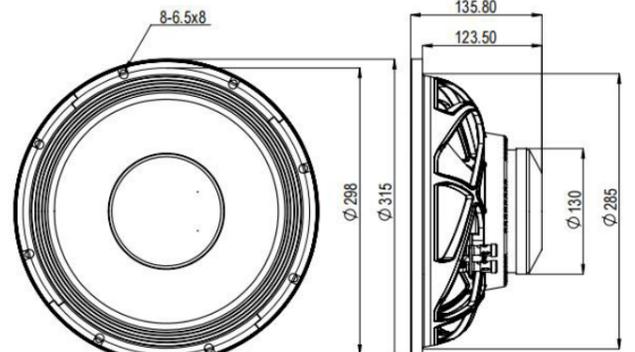

12" 121FIND

Mid-woofer



Key features:

- EXTENDED FREQUENCY RESPONSE
- PROVEN COST EFFECTIVE DESIGN
- NOMEX SPIDER, WATER-REPELLENT & NON-FLAMMABLE PAPER CONE

Design notes:

The 121FIND is a high efficiency, (96 dB 1watt/ 1 meter) 12inch woofer with incredibly linear frequency response characteristics, high power handling capability while generating low harmonic distortion artifacts. 121FIND uses lightweight cone which movement is controlled by „ÄM,Äu shaped surround. Pistonic behavior and the long term stability Is supported by Nomex spider. The woofer cone is treated to withstand harsh environ-

ments and high humidity.

The 121FIND was design for its best use in the 2-way applications, where excellent midrange response is required. Speaker provides good low frequency extension and delivers seizable amounts of low frequencies.


The metal parts in the speaker are coated and tested to ensure extreme weatherization

protection.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 12"	Resonant frequency: 59 Hz	Surround Material: Fabric	121FIND-X4 ohm-233
Rated Impedance: 4 ohm	Re: 3.1 ohm	Cone material: Paper	
Power handling	Qes: 0.56	Spider: Nomex	
AES Power: 250 watts	Qms: 7.34	Plate thickness: 8 mm	
Program Power: 500 watts	Qts: 0.52	Peak to peak linear cone displacement: 13 mm	Recone kits:
Peak Power: 1000 watts	Vas: 59.1 liters	Overall diameter: 320 mm	RC121FINDX-233
Voice Coil	Sd: 531 cm2	Bolt circle diameter: 302 mm	
Diameter: 2 in.	Sensitivity: 96 dB	Baffle cutout dia.: 282 mm	In many cases REDCATT
Winding wire: CCAW	Mms: 49.1 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 10.2	Depth (flange to rear): 124 mm	16 ohms versions. Indicate
Winding height: 11.7 mm	Le: 0.32 mH	Net weight: 4.6kg	what impedance do you need
			in your request.

Frequency response & Impedance

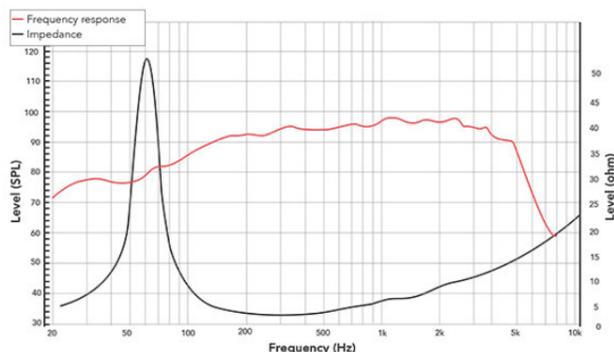

Frequency response measured on IAC baffle

2D drawing

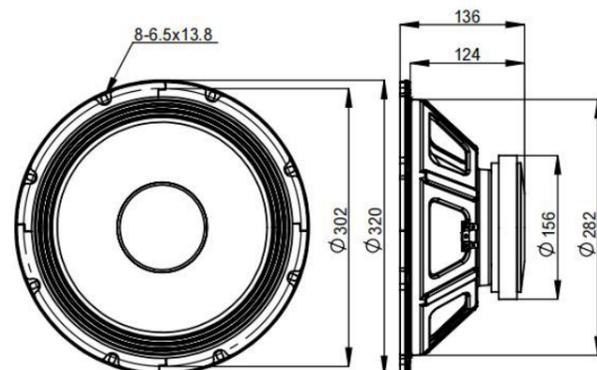

15" 15NPW

Woofer



Key features:

- CARBON FIBER LOADED PAPER CONE
- DOUBLE SILICONE SPIDER
- HIGH POWER HANDLING

Design notes:

The 15NPW is a high efficiency, (97 dB 1watt / 1 meter) 15-inch woofer with linear frequency response characteristics, high power handling capability while generating low harmonic distortion artifacts. The 15NPW uses a lightweight carbon fiber loaded cone assembly along with a high excursion triple roll constant geometry surround. This combination provides remarkable strength, high efficiency and a peak to peak maximum excursion of 15mm.

Woofer features REDCATT double silicone sealed spider.

Power Handling At the core of the 15NPW is it,Äs voice coil technology featuring a composite Polyimide former material capable of withstanding peak temperatures in excess of 350degC, well beyond the thermal requirements of modern professional audio systems.


The 15NPW cone and dust cap

are made using an advanced carbon fiber loaded REDCATT pulp. The woofer cone is also extensively treated to withstand harsh environments and high humidity. Metal parts in the speaker assembly are coated for extreme weatherization protection.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 15"	Resonant frequency: 40 Hz	Surround Material: Fabric	15NPW-X8 ohm-016
Rated Impedance: 8 ohm	Re: 5.6 ohm	Cone material: Paper	
Power handling	Qes: 0.28	Spider: Nomex	
AES Power: 1200 watts	Qms: 8.77	Plate thickness: 14 mm	
Program Power: 2400 watts	Qts: 0.27	Peak to peak linear cone displacement: 14.6 mm	Recone kits:
Peak Power: 4800 watts	Vas: 107 liters	Overall diameter: 392 mm	RC15NPWX-016
Voice Coil	Sd: 881 cm2	Bolt circle diameter: 373 mm	
Diameter: 4 in.	Sensitivity: 97 dB	Baffle cutout dia.: 360 mm	In many cases REDCATT
Winding wire: Copper	Mms: 155.1 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 28.3	Depth (flange to rear): 155.5 mm	16 ohms versions. Indicate
Winding height: 25.5 mm	Le: 1.65 mH	Net weight: 8.5kg	what impedance do you need
			in your request.

Frequency response & Impedance

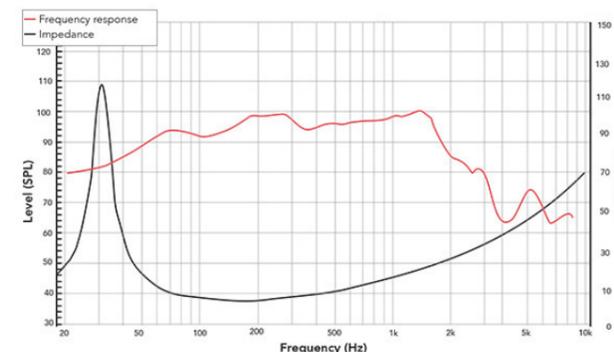

Frequency response measured on IAC baffle

2D drawing

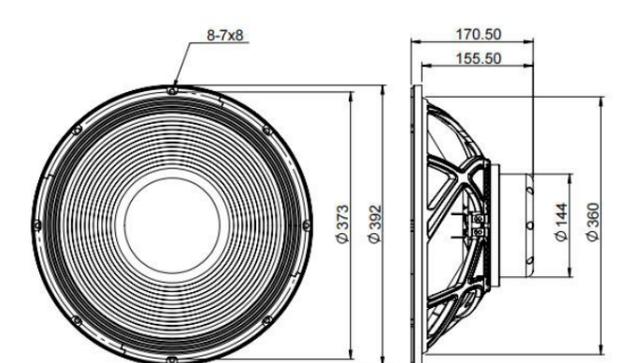

15" | 15NPM

Mid-woofer



Key features:

- EXTENDED FREQUENCY RESPONSE
- 2 DEMODULATION RINGS, LIGHTWEIGHT CARBON FIBER LOADED PAPER CONE
- HI BL, DOUBLE AIR-GAP, POWERFUL MOTOR STRUCTURE

Design notes:

The 15NPM is a truly unique full range woofer. We have designed cutting edge product, using the best available materials and highly optimized design for the best performance in its class. It delivers very high efficiency, (98 dB 1 watt / 1 meter), incredibly linear frequency response characteristics with extended HF frequency response, high power handling capability, while generating ultra low harmonic distortion artifacts. The 15NPM

uses a lightweight carbon fiber loaded cone assembly along with a high excursion triple roll constant geometry surround. This combination provides remarkable strength, high efficiency and a peak to peak linear excursion of 21mm.

Magnetic Circuit


The magnetic circuit sports two aluminum shorting rings, double air-gap front plate. The cooling system and the air flow has

been designed using modern FEM techniques and further optimized to provide the highest levels of cooling efficiency. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability..

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 15"	Resonant frequency: 48 Hz	Surround Material: Fabric	15NPM-X8 ohm-262
Rated Impedance: 8 ohm	Re: 4.7 ohm	Cone material: Paper	
Power handling	Qes: 0.47	Spider: Nomex	
AES Power: 800 watts	Qms: 16.5	Plate thickness: 13 mm	
Program Power: 1600 watts	Qts: 0.46	Peak to peak linear cone displacement: 21.2 mm	Recone kits:
Peak Power: 3200 watts	Vas: 89.9 liters	Overall diameter: 392 mm	RC15NPMX-262
Voice Coil	Sd: 855.3 cm ²	Bolt circle diameter: 373 mm	
Diameter: 4 in.	Sensitivity: 98 dB	Baffle cutout dia.: 360 mm	In many cases REDCATT
Winding wire: Aluminum Sq.	Mms: 123 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 19.3	Depth (flange to rear): 149.5 mm	16 ohms versions. Indicate
Winding height: 23 mm	Le: 0.68 mH	Net weight: 6.65kg	what impedance do you need
			in your request.

Frequency response & Impedance

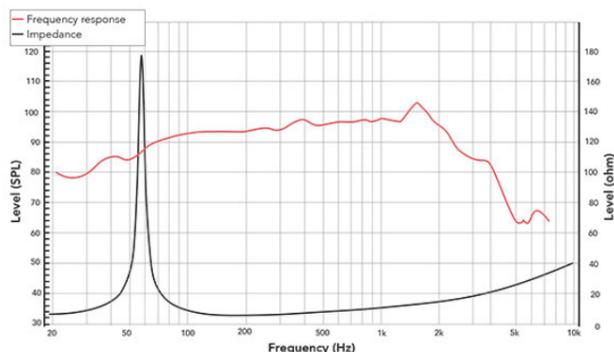

Frequency response measured on IAC baffle

2D drawing

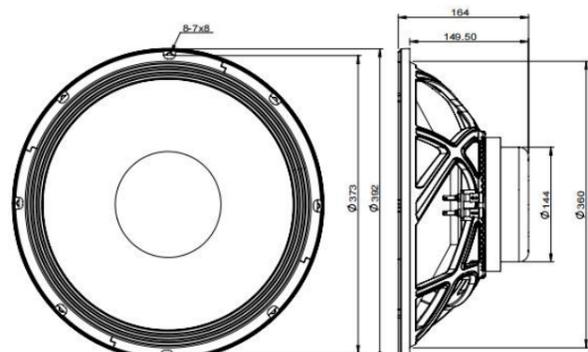

15" | 15FPM

Mid-woofer



Key features:

- CARBON FIBER REINFORCED PAPER CONE
- SQUARE ALUMINUM WINDING WIRE (ALR)
- GREAT OPTION FOR POWERFUL 2-WAY SYSTEMS

Design notes:

The 15FPM is a high efficiency, (98 dB 1 watt / 1 meter) 15-inch woofer with incredibly linear frequency response characteristics. The 15FPM uses a light-weight, but strong, carbon fiber loaded cone assembly along with a high excursion triple roll constant geometry surround. Cone material was specifically developed with 2-way or multi-way application in mind. The 15FPM has extended mid frequency range, providing possibility for cross overs

at higher frequencies.

Power Handling

At the core of the 15FPM is it, Ås voice coil technology featuring a composite Polyimide former material capable of withstanding peak temperatures in excess of 250°C, well beyond the thermal requirements of modern professional audio systems. The coil is wound on the outside of the former. Winding material is aluminum ribbon, ma-


terial that provides ideal transient response.

REDCATT has implemented a silicone spider design to ensure long term Fs memory, consistency and diminish anomalies associated with spider deterioration. The sealed spider works as a air pump and pushes the air trough out motor to increase heat transfer and cooling of the parts.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 15"	Resonant frequency: 41 Hz	Surround Material: Fabric	15FPM-X8 ohm-063
Rated Impedance: 8 ohm	Re: 5.2 ohm	Cone material: Paper	
Power handling	Qes: 0.38	Spider: Nomex	
AES Power: 1000 watts	Qms: 8.07	Plate thickness: 12 mm	
Program Power: 2000 watts	Qts: 0.36	Peak to peak linear cone displacement: 15.4 mm	Recone kits:
Peak Power: 4000 watts	Vas: 134.9 liters	Overall diameter: 392 mm	RC15FPMX-063
Voice Coil	Sd: 908 cm ²	Bolt circle diameter: 373 mm	
Diameter: 4 in.	Sensitivity: 98 dB	Baffle cutout dia.: 360 mm	In many cases REDCATT
Winding wire: Aluminum Sq.	Mms: 126.6 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 21.3	Depth (flange to rear): 150 mm	16 ohms versions. Indicate
Winding height: 21 mm	Le: 1.17 mH	Net weight: 12kg	what impedance do you need
			in your request.

Frequency response & Impedance

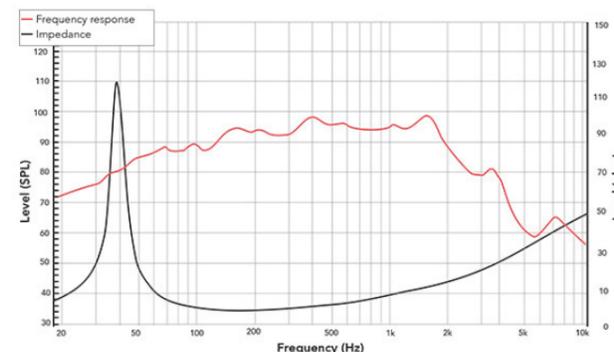

Frequency response measured on IAC baffle

2D drawing

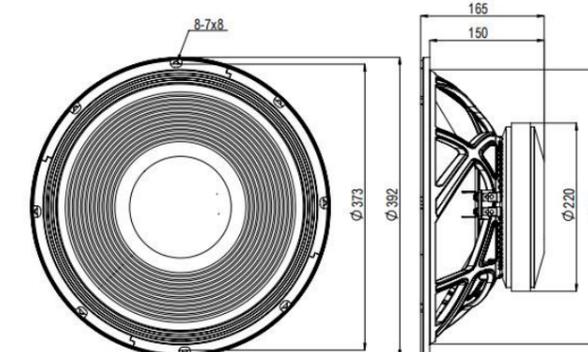

15" 15FIND

Woofer



Key features:

- GLASS FIBER AND RIB REINFORCED PAPER CONE
- FEM OPTIMIZED AIR CIRCULATION
- SILICONE SEALED SURROUND

Design notes:

The 15FIND is a high efficiency, (97 dB 1watt / 1 meter) 15-inch woofer with incredibly linear frequency response characteristics, extreme high power handling capability while generating low harmonic distortion artifacts. The 15FIND uses a lightweight, but strong, glass fiber loaded cone assembly along with a high excursion triple roll constant geometry surround. This combination provides remarkable strength, high efficiency and a peak to peak maximum excursion of 21mm.

Power Handling

At the core of the 15FIND is it, Åôs voice coil technology featuring a composite Polyimide former material capable of withstanding peak temperatures in excess of 250°C, well beyond the thermal requirements of modern professional audio systems. Winding if wound on the outside and inside of the former.


REDCATT has implemented a silicone spider design to ensure long term Fs memory, consistency and diminish anomalies associated with spider deterioration. The sealed spider works as a air pump and pushes the air trough out motor to increase heat transfer and cooling of the parts.

REDCATT has implemented a silicone spider design to ensure long term Fs memory, consistency and diminish anomalies associated with spider deterioration. The sealed spider works as a air pump and pushes the air trough out motor to increase heat transfer and cooling of the parts.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 15"	Resonant frequency: 42 Hz	Surround Material: Fabric	15FIND-X8 ohm-035
Rated Impedance: 8 ohm	Re: 5.4 ohm	Cone material: Paper	
Power handling	Qes: 0.37	Spider: Nomex	
AES Power: 1000 watts	Qms: 8.31	Plate thickness: 12 mm	
Program Power: 2000 watts	Qts: 0.36	Peak to peak linear cone displacement: 21 mm	Recone kits:
Peak Power: 4000 watts	Vas: 96.4 liters	Overall diameter: 392 mm	RC15FINDX-035
Voice Coil	Sd: 881 cm ²	Bolt circle diameter: 373 mm	
Diameter: 4 in.	Sensitivity: 97 dB	Baffle cutout dia.: 360 mm	In many cases REDCATT
Winding wire: Copper	Mms: 159.6 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 24.6	Depth (flange to rear): 150 mm	16 ohms versions. Indicate
Winding height: 25.5 mm	Le: 1.18 mH	Net weight: 12kg	what impedance do you need
			in your request.

Frequency response & Impedance

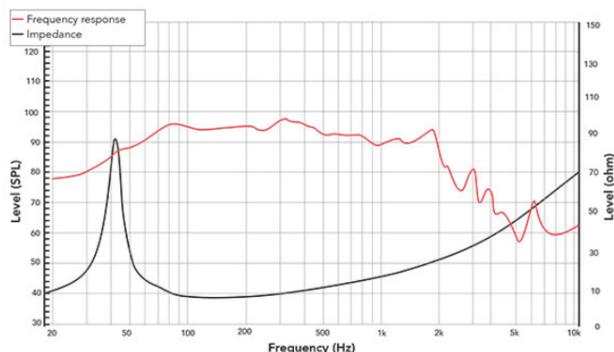

Frequency response measured on IAC baffle

2D drawing

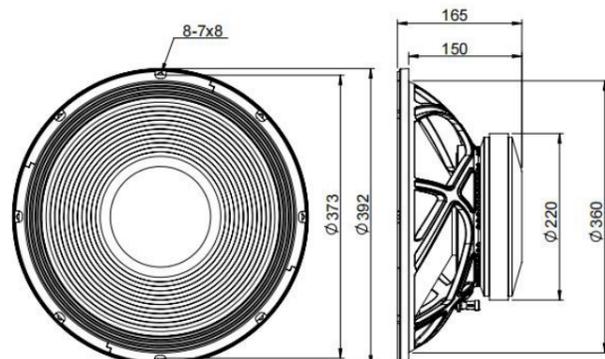

15" 15FHW

Sub-woofer



Key features:

- HI SENSITIVITY, LOW RESONANT FREQUENCY
- NOMEX SPIDER
- STRONG, YET LIGHT-WEIGHT CONE

Design notes:

The 15FHW is an ultra low frequency sub-woofer, designed to deliver large amounts of very low frequencies. With 91 dB 1watt / 1 meter sensitivity, you find this 15-inch sub-woofer with incredibly linear frequency response characteristics ideally assembled in sub-woofers for hi-fi, gaming, studios or cinema. The 15FHW uses a strong paper cone, along with a high excursion single roll rubber surround. Rubber surround material was specifically

developed for this application. The shape of the surround roll was FEM optimized to ensure low distortion in whole working range.

Power Handling

At the core of the 15FHW is it, Åôs voice coil technology featuring a composite Polyimide former material capable of withstanding peak temperatures in excess of 200°C, well beyond the thermal requirements of


modern professional audio systems.

REDCATT has implemented a Nomex(r) spider design to ensure long term Fs memory, consistency and diminish anomalies associated with spider deterioration.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 15"	Resonant frequency: 24 Hz	Surround Material: Rubber	15FHW-X8 ohm-089
Rated Impedance: 8 ohm	Re: 5.8 ohm	Cone material: Paper	
Power handling	Qes: 0.63	Spider: Cotton	
AES Power: 400 watts	Qms: 11.9	Plate thickness: 10 mm	
Program Power: 800 watts	Qts: 0.6	Peak to peak linear cone displacement: 19.6 mm	Recone kits:
Peak Power: 1600 watts	Vas: 221.2 liters	Overall diameter: 385 mm	RC15FHWX-089
Voice Coil	Sd: 804 cm ²	Bolt circle diameter: 371 mm	
Diameter: 3 in.	Sensitivity: 91 dB	Baffle cutout dia.: 349 mm	In many cases REDCATT
Winding wire: Copper	Mms: 169.6 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 15.8	Depth (flange to rear): 168.1 mm	16 ohms versions. Indicate
Winding height: 19.7 mm	Le: 0.96 mH	Net weight: 6.8kg	what impedance do you need
			in your request.

Frequency response & Impedance

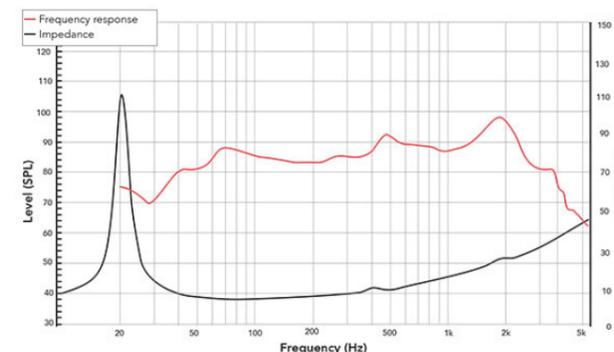

Frequency response measured on IAC baffle

2D drawing

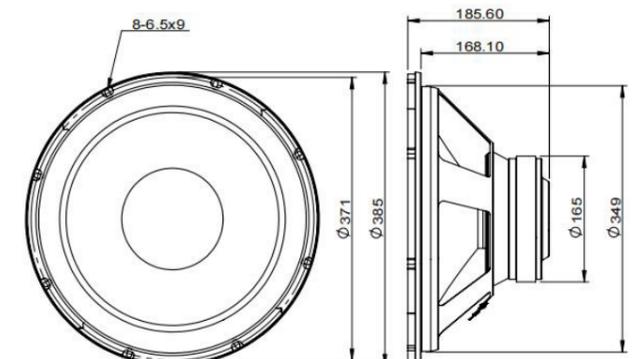

15" 154FIND

Mid-woofer



Key features:

- COST EFFECTIVE DESIGN, YET WITH HIGH SPL, EXTENDED MID FREQUENCY
- GOOD POWER HANDLING
- LIGHTWEIGHT PAPER CONE, CONEX SPIDER

Design notes:

The 154FIND is a cost-effective solution for two-way and multi-way systems, together with subwoofers. It's lightweight yet strong cone allows the magnetic circuit to be size optimized while delivering a sizeable amount of sound pressure. With its high efficiency (97 dB 1 watt / 1 meter) and high power handling capabilities, this woofer will excel in all applications with tight budgets. The cone shape and material was developed to extend

mid-frequency response, making the woofer good choice for two-way and multi-way systems.


Power Handling
At the core of the 154FIND is its voice coil technology featuring a composite Polyimide former material capable of withstanding peak temperatures above 280°C. The winding with high temperature handling copper wire ensures the long life of the

voice coil, without the costly service cycles. The cone is also extensively treated to withstand harsh environments and high humidity. Metal parts in the speaker assembly are coated for extreme weatherization protection.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 15"	Resonant frequency: 38 Hz	Surround Material: Fabric	154FIND-X8 ohm-298
Rated Impedance: 8 ohm	Re: 5.6 ohm	Cone material: Paper	
	Qes: 0.43	Spider: Nomex	
Power handling	Qms: 8.1	Plate thickness: 8 mm	
AES Power: 500 watts	Qts: 0.4	Peak to peak linear cone displacement: 17.2 mm	Recone kits:
Program Power: 1000 watts	Vas: 187.2 liters	Overall diameter: 387 mm	RC154FINDX-298
Peak Power: 2000 watts	Sd: 881 cm ²	Bolt circle diameter: 374 mm	
Voice Coil	Sensitivity: 97 dB	Baffle cutout dia.: 355 mm	In many cases REDCATT
Diameter: 2.5 in.	Mms: 103 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Winding wire: Copper	Bl: 18.1	Depth (flange to rear): 155 mm	16 ohms versions. Indicate
Former: Glass Fiber	Le: 0.97 mH	Net weight: 6.3kg	what impedance do you need
Winding height: 17 mm			in your request.

Frequency response & Impedance

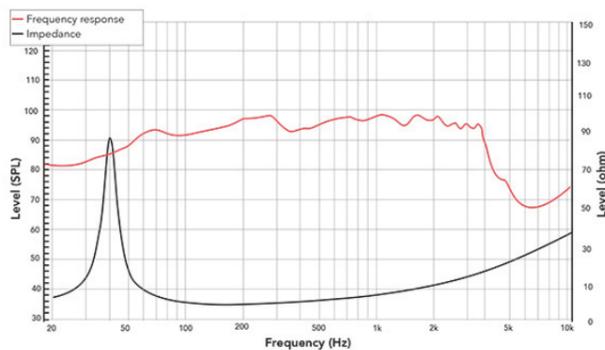

Frequency response measured on IAC baffle

2D drawing

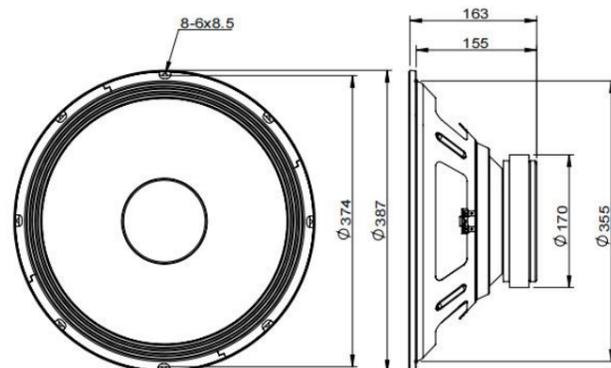

15" 152FIND

Woofer



Key features:

- EXTENDED LOW FREQUENCY RESPONSE
- LIGHTWEIGHT CARBON FIBER LOADED PAPER CONE
- HIGH SPL

Design notes:

The 152FIND is a high efficiency, (99 dB 1 watt / 1 meter) 15-inch woofer with incredibly linear frequency response characteristics, high power handling capability while generating low harmonic distortion artifacts. The 152FIND uses a lightweight carbon fiber loaded cone assembly along with a high excursion triple roll constant geometry surround. This combination provides remarkable strength, high efficiency and a peak to peak maximum excursion of

15mm.

Power Handling
At the core of the 152FIND is its voice coil technology featuring a composite Polyimide former material capable of withstanding peak temperatures in excess of 280°C, well beyond the thermal requirements of modern professional audio systems.


The 152FIND cone and dust cap are made using an advanced carbon fiber

loaded REDCATT pulp. The woofer cone is also extensively treated to withstand harsh environments and high humidity. Metal parts in the speaker assembly are coated for extreme weatherization protection.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 15"	Resonant frequency: 44 Hz	Surround Material: Fabric	152FIND-X8 ohm-115
Rated Impedance: 8 ohm	Re: 4.8 ohm	Cone material: Paper	
	Qes: 0.38	Spider: Nomex	
Power handling	Qms: 13	Plate thickness: 10 mm	
AES Power: 800 watts	Qts: 0.37	Peak to peak linear cone displacement: 15 mm	Recone kits:
Program Power: 1600 watts	Vas: 128.5 liters	Overall diameter: 392 mm	RC152FINDX-115
Peak Power: 3200 watts	Sd: 829.6 cm ²	Bolt circle diameter: 373 mm	
Voice Coil	Sensitivity: 99 dB	Baffle cutout dia.: 360 mm	In many cases REDCATT
Diameter: 3 in.	Mms: 95.6 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Winding wire: CCAW	Bl: 18.3	Depth (flange to rear): 137 mm	16 ohms versions. Indicate
Former: Glass Fiber	Le: 0.98 mH	Net weight: 8.5kg	what impedance do you need
Winding height: 18.9 mm			in your request.

Frequency response & Impedance

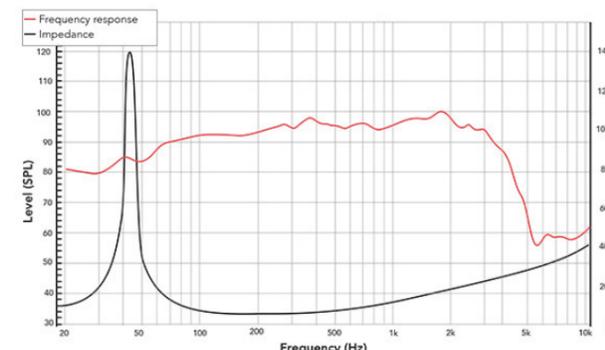

Frequency response measured on IAC baffle

2D drawing

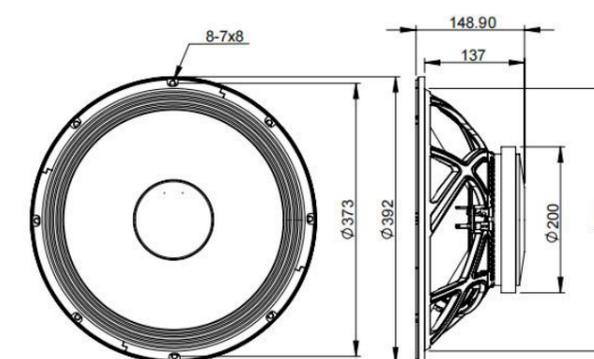

15" 152FIND

Sub-woofer



Key features:

- EXTENDED LOW FREQUENCY RESPONSE
- CARBON FIBER REINFORCED CONE
- HIGH EXCURSION RUBBER SURROUND

Design notes:

The 152FIND-333 is a high efficiency, (96 dB 1watt / 1 meter) 15-inch woofer with linear frequency response characteristics and high power handling capability. The 152FIND-333 uses a lightweight carbon fiber loaded cone assembly along with a high excursion rubber surround. This combination greatly improves low-frequency response and provides great level of control over the moving cone at high excursion levels. We have designed

a lightweight surround, using our own rubber compound. As the result, the SPL is not compromised and the woofer can be used in professional audio applications, where high amounts of low frequencies are required.


Power Handling
At the core of the 152FIND-333 is it, Åôs voice coil technology featuring a composite Polyimide former material capable

of withstanding peak temperatures in excess of 280C, well beyond the thermal requirements of modern professional audio systems. The 152FIND-333 cone is extensively treated to withstand harsh environments and high humidity. Metal parts in the speaker assembly are coated for extreme weatherization protection.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 15"	Resonant frequency: 37 Hz	Surround Material: Rubber	152FIND-X8 ohm-333
Rated Impedance: 8 ohm	Re: 4.6 ohm	Cone material: Paper	
	Qes: 0.46	Spider: Nomex	
Power handling	Qms: 10.2	Plate thickness: 10 mm	
AES Power: 800 watts	Qts: 0.44	Peak to peak linear cone displacement: 20 mm	Recone kits:
Program Power: 1600 watts	Vas: 119 liters	Overall diameter: 392 mm	RC152FINDX-333
Peak Power: 3200 watts	Sd: 804 cm ²	Bolt circle diameter: 375 mm	
Voice Coil	Sensitivity: 96 dB	Baffle cutout dia.: 360 mm	In many cases REDCATT
Diameter: 3 in.	Mms: 140 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Winding wire: CCAW	Bl: 18.4	Depth (flange to rear): 143 mm	16 ohms versions. Indicate
Former: Glass Fiber	Le: 0.55 mH	Net weight: 9kg	what impedance do you need
Winding height: 19 mm			in your request.

Frequency response & Impedance

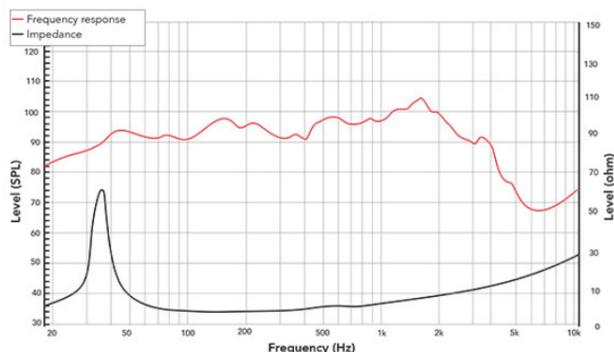

Frequency response measured on IAC baffle

2D drawing

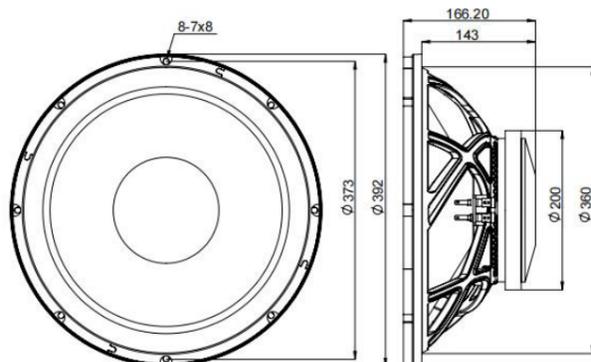

18" 18XR

Sub-woofer



Key features:

- CONE EXCURSION 56MM !! PATENTED DESIGN.
- 1 DEMODULATION COPPER RING, POWERFUL AND INNOVATIVE MOTOR STRUCTURE, INNOVATIVE VENTING SYSTEM
- DOUBLE SPIDER WITH SPACER, WOVEN-IN TINSEL WIRES, OPTIMIZED SURROUND

Design notes:

The 18XR is a truly groundbreaking subwoofer. REDCATT team has spent countless hours creating something outstanding. Where the conventional sub-woofers stop performing due to the design limitations, the XR series just starts and shines. With huge excursion, high Bl, newly designed suspension system, we are giving you a product that will not limit you to achieve even your wildest sub-woofer dreams.


Motor Design
The magnetic design incorporates large neodymium magnets placed along the voice coil winding. This has allowed us to push the cone excursion to 52mm peak to peak. Unique gap venting ensures good air circulation and greatly improves the reliability of this driver. We have also developed a new technique for manufacturing deep copper caps.

The design further utilizes two, uncommonly large, spiders, spaced apart with spacer, hot-pressed tinsel wires onto the top spider, reinforced cone. The suspension is designed for large excursions. Large lightweight surround sports resonant control features that we fully FEM designed and optimized to provide the best possible performance under large excursions.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 18"	Resonant frequency: 21 Hz	Surround Material: Rubber	18XR-X4 ohm-304B
Rated Impedance: 4 ohm	Re: 3.3 ohm	Cone material: Paper	
	Qes: 0.36	Spider: Nomex	
Power handling	Qms: 17	Plate thickness: 56 mm	
AES Power: 1200 watts	Qts: 0.35	Peak to peak linear cone displacement: 52 mm	Recone kits:
Program Power: 2400 watts	Vas: 300 liters	Overall diameter: 467.6 mm	RC18XRX-304B
Peak Power: 4800 watts	Sd: 1256.6 cm ²	Bolt circle diameter: 442 mm	
Voice Coil	Sensitivity: 92 dB	Baffle cutout dia.: 422 mm	In many cases REDCATT
Diameter: 4 in.	Mms: 402 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Winding wire: Copper	Bl: 22.2	Depth (flange to rear): 257.2 mm	16 ohms versions. Indicate
Former: Glass Fiber	Le: 0.54 mH	Net weight: 14.7kg	what impedance do you need
Winding height: 22 mm			in your request.

Frequency response & Impedance

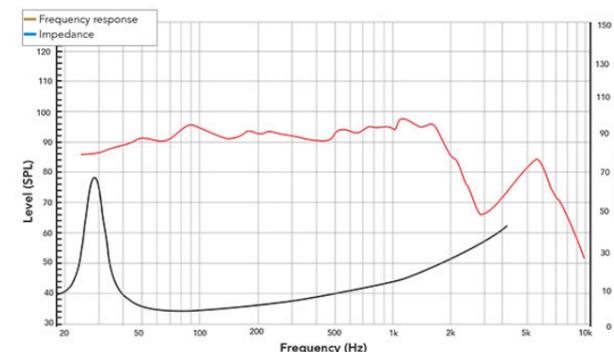

Frequency response measured on IAC baffle

2D drawing

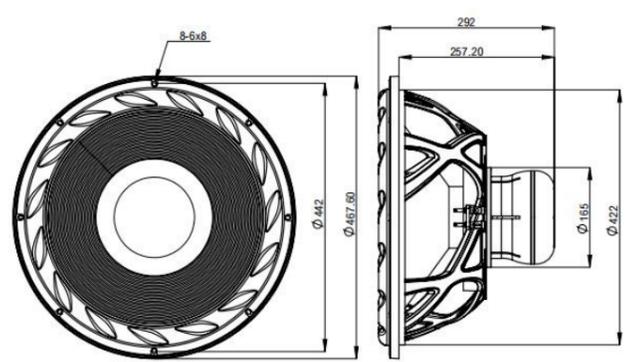

18" | 18NPW

Woofer



Key features:

- STRONG GLASS FIBER LOADED CONE
- HIGH TEMPERATURE VOICE COIL, DOUBLE LAYER SILICONE SPIDER
- HIGH POWER HANDLING

Design notes:

The 18NPW is a high efficiency, (99 dB 1watt / 1 meter) 18-inch woofer with incredibly linear frequency response characteristics, extreme high power handling capability while generating low harmonic distortion artifacts. The 18NPW uses a lightweight, but strong, glass fiber loaded cone assembly along with a high excursion triple roll constant geometry surround. This combination provides remarkable strength, high efficiency and a peak to peak maxi-

mum excursion of 21.5mm.

Power Handling

At the core of the 18NPW is it's voice coil technology featuring a composite Polyimide former material capable of withstanding peak temperatures in excess of 350°C, well beyond the thermal requirements of modern professional audio systems. The 18NPW delivers incredible performance.

REDCATT has implemented a double layer/silicone spider design to ensure long term Fs memory, consistency and diminish anomalies associated with spider deterioration. The sealed spider works as a air pump and pushes the air trough out motor to increase heat transfer and cooling of the parts.

Specifications:

General specs

Nominal Diameter: 18"

Rated Impedance: 8 ohm

Power handling

AES Power: 1200 watts

Program Power: 2400 watts

Peak Power: 4800 watts

Voice Coil

Diameter: 4 in.

Winding wire: Copper

Former: Glass Fiber

Winding height: 23.7 mm

T/S Parameters

Resonant frequency: 36 Hz

Re: 5.1 ohm

Qes: 0.28

Qms: 8.39

Qts: 0.278

Vas: 211.5 liters

Sd: 1257 cm²

Sensitivity: 99 dB

Mms: 199.4 grams

Bl: 27.3

Le: 1.51 mH

Design details

Surround Material: Fabric

Cone material: Paper

Spider: Nomex

Plate thickness: 14 mm

Peak to peak linear cone displacement: 21.4 mm

Overall diameter: 468 mm

Bolt circle diameter: 442 mm

Baffle cutout dia.: 426 mm

Number of mounting holes: 8

Depth (flange to rear): 189 mm

Net weight: 9.4kg

Ordering codes:


18NPW-X8 ohm-017

Recone kits:

RC18NPWX-017


In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

Frequency response & Impedance

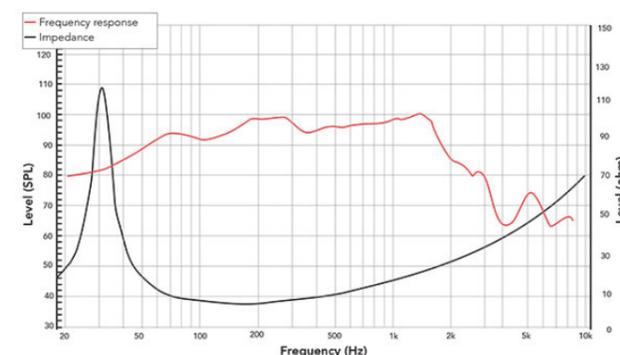

Frequency response measured on IAC baffle

2D drawing

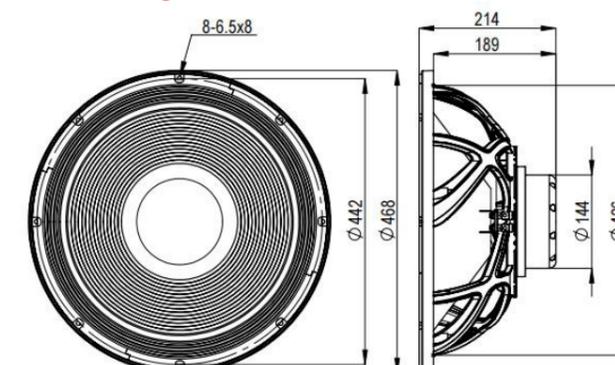

18" | 18FIND

Woofer



Key features:

- EXTENDED FREQUENCY RESPONSE
- OPTIMIZED VENTING SYSTEM
- HIGH POWER HANDLING

Design notes:

The 18FIND is a high efficiency, (97 dB 1 watt / 1 meter) 18-inch woofer with incredibly linear frequency response characteristics, high power handling capability while generating low harmonic distortion artifacts. The 18FIND uses a lightweight glass fiber loaded cone assembly along with a high excursion triple roll constant geometry surround. This combination provides remarkable strength, high efficiency and a peak to peak maximum excursion of 21mm.

Power Handling

At the core of the 18FIND is its voice coil technology featuring a composite Polyimide former material capable of withstanding peak temperatures in excess of 250C, well beyond the thermal requirements of modern professional audio systems.


REDCATT has implemented a silicone spider design to ensure long term shape

memory, consistency and diminish anomalies associated with spider deterioration.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 18"	Resonant frequency: 36 Hz	Surround Material: Fabric	18FIND-X8 ohm-036
Rated Impedance: 8 ohm	Re: 5.2 ohm	Cone material: Paper	
Power handling	Qes: 0.44	Spider: Nomex	
AES Power: 1000 watts	Qms: 8.4	Plate thickness: 12 mm	
Program Power: 2000 watts	Qts: 0.42	Peak to peak linear cone displacement: 20.8 mm	Recone kits:
Peak Power: 4000 watts	Vas: 203.4 liters	Overall diameter: 468 mm	RC18FINDX-036
Voice Coil	Sd: 1257 cm ²	Bolt circle diameter: 442 mm	
Diameter: 4 in.	Sensitivity: 97 dB	Baffle cutout dia.: 426 mm	In many cases REDCATT
Winding wire: Copper	Mms: 211.8 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 23.6	Depth (flange to rear): 184 mm	16 ohms versions. Indicate
Winding height: 23.7 mm	Le: 1.74 mH	Net weight: 13.7kg	what impedance do you need
			in your request.

Frequency response & Impedance

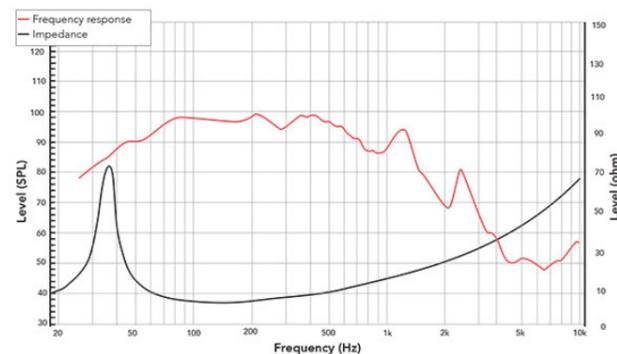

Frequency response measured on IAC baffle

2D drawing

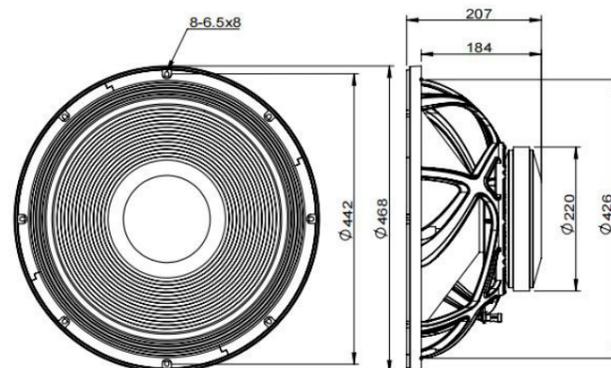

18" | 186FIND

Woofer



Key features:

- 4.5 INCH HIGH TEMPERATURE VOICE COIL
- HIGH SOUND PRESSURE LEVEL
- VERY HIGH POWER HANDLING

Design notes:


Introducing 186FIND, the powerhouse woofer designed for superior audio performance. With a staggering 3,600 watts of peak power and a 4.5" voice coil that can withstand temperatures exceeding 350°C, this woofer is built to impress. Featuring a new paper pulp mixed with glass fibers, high excursion surround, and an extra large spider, it delivers unparalleled longevity and bass. The motor system's high grade ferrite

magnet creates a strong symmetrical flux field, while the extended space below the voice coil allows for maximum excursion. Get ready to be blown away by the 186FIND woofer.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 18"	Resonant frequency: 33 Hz	Surround Material: Fabric	186FIND-X8 ohm-552A
Rated Impedance: 8 ohm	Re: 5.5 ohm	Cone material: Paper	
Power handling	Qes: 0.36	Spider: Nomex	
AES Power: 1800 watts	Qms: 12.1	Plate thickness: 15 mm	
Program Power: 3600 watts	Qts: 0.35	Peak to peak linear cone displacement: 19 mm	Recone kits:
Peak Power: 7200 watts	Vas: 174.2 liters	Overall diameter: 468 mm	RC186FINDX-552A
Voice Coil	Sd: 1256 cm ²	Bolt circle diameter: 442 mm	
Diameter: 4.5 in.	Sensitivity: 96 dB	Baffle cutout dia.: 423 mm	In many cases REDCATT
Winding wire: Copper	Mms: 288 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 30.2	Depth (flange to rear): 212 mm	16 ohms versions. Indicate
Winding height: 31.8 mm	Le: 1.51 mH	Net weight: 19.3kg	what impedance do you need
			in your request.

Frequency response & Impedance

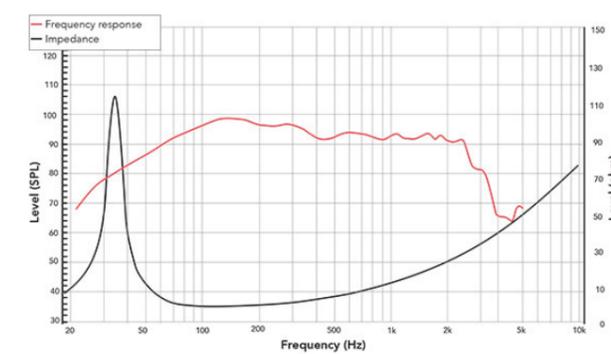

Frequency response measured on IAC baffle

2D drawing

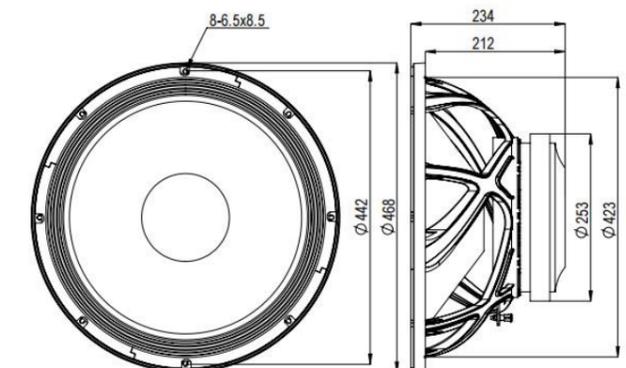

18" 183FIND

Woofer



Key features:

- OPTIMIZED FERRITE MAGNETIC STRUCTURE
- LIGHTWEIGHT, YET STRONG PAPER CONE
- HI SPL

Design notes:

183FIND is a cost-effective solution for subwoofers. Its lightweight yet strong cone allows the magnetic circuit to be size optimized while delivering a sizeable amount of sound pressure. With its high efficiency (97 dB 1watt / 1 meter) and high power handling capabilities, this woofer will excel in all applications with tight budgets. The cone shape and material was developed to provide an optimum low-frequency response, making the woofer good choice

for subwoofer systems. ↗†


Power Handling
At the core of the 183FIND is its voice coil technology featuring a composite Polyimide former material capable of withstanding peak temperatures above 280°C. The winding with high-temperature specification copper wire ensures the long life of the voice coil, without the costly service cycles. ↗†

The cone is also extensively treated to withstand harsh environments and high humidity. Metal parts in the speaker assembly are coated for extreme weatherization protection.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 18"	Resonant frequency: 32 Hz	Surround Material: Fabric	183FIND-X8 ohm-297
Rated Impedance: 8 ohm	Re: 5.9 ohm	Cone material: Paper	
	Qes: 0.43	Spider: ET-0527	
Power handling	Qms: 13.2	Plate thickness: 8 mm	
AES Power: 600 watts	Qts: 0.42	Peak to peak linear cone displacement: 16.8 mm	Recone kits:
Program Power: 1200 watts	Vas: 329.5 liters	Overall diameter: 461 mm	RC183FINDX-297
Peak Power: 2400 watts	Sd: 1225.4 cm ²	Bolt circle diameter: 442 mm	
Voice Coil	Sensitivity: 97 dB	Baffle cutout dia.: 422 mm	In many cases REDCATT
Diameter: 3 in.	Mms: 165 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Winding wire: Copper	Bl: 21.14	Depth (flange to rear): 184 mm	16 ohms versions. Indicate
Former: Glass Fiber	Le: 0.73 mH	Net weight: 8.8kg	what impedance do you need
Winding height: 19.8 mm			in your request.

Frequency response & Impedance

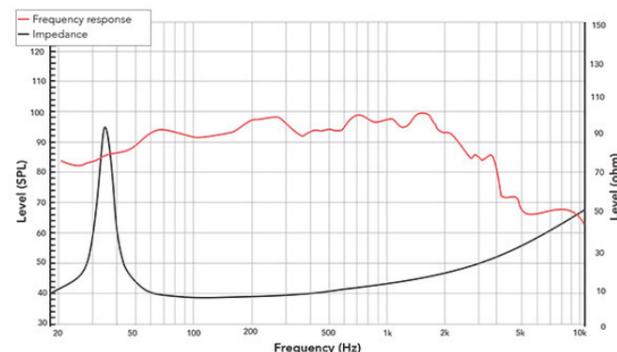

Frequency response measured on IAC baffle

2D drawing

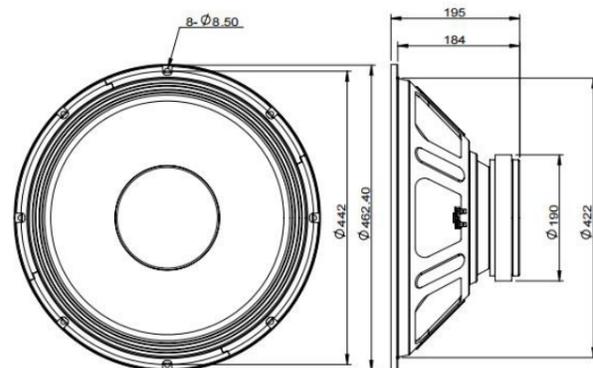

18" 182FIND

Woofer



Key features:

- INSIDE / OUTSIDE WOUND COIL
- REINFORCED HALF PRESSED CONE
- SILICONE NOMEX SPIDER

Design notes:

The 182FIND is a high efficiency, (98 dB 1watt / 1 meter) 18-inch woofer with extended linear frequency response characteristics. The 182FIND uses durable half-pressed paper cone assembly along with a high excursion triple roll constant geometry surround. This combination provides remarkable strength at any given situation, high efficiency and a peak to peak maximum excursion of 27mm.

Power Handling
At the core of the 182FIND is its voice coil technology featuring a composite Polyimide former material capable of withstanding peak temperatures in excess of 250°C, well beyond the thermal requirements of modern professional audio systems. Voice coil winding is wound inside and outside of the former in the 1-3 split.


REDCATT has implemented a silicone

spider design to ensure long term shape memory, consistency and diminish anomalies associated with spider deterioration.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 18"	Resonant frequency: 31 Hz	Surround Material: Fabric	182FIND-X8 ohm-127
Rated Impedance: 8 ohm	Re: 5.5 ohm	Cone material: Paper	
	Qes: 0.24	Spider: Nomex	
Power handling	Qms: 8.85	Plate thickness: 14 mm	
AES Power: 1000 watts	Qts: 0.23	Peak to peak linear cone displacement: 27.2 mm	Recone kits:
Program Power: 2000 watts	Vas: 208.6 liters	Overall diameter: 468 mm	RC182FINDX-127
Peak Power: 4000 watts	Sd: 1257 cm ²	Bolt circle diameter: 442 mm	
Voice Coil	Sensitivity: 98 dB	Baffle cutout dia.: 426 mm	In many cases REDCATT
Diameter: 4 in.	Mms: 281 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Winding wire: Copper	Bl: 35.4	Depth (flange to rear): 189 mm	16 ohms versions. Indicate
Former: Glass Fiber	Le: 4.92 mH	Net weight: 14kg	what impedance do you need
Winding height: 25.5 mm			in your request.

Frequency response & Impedance

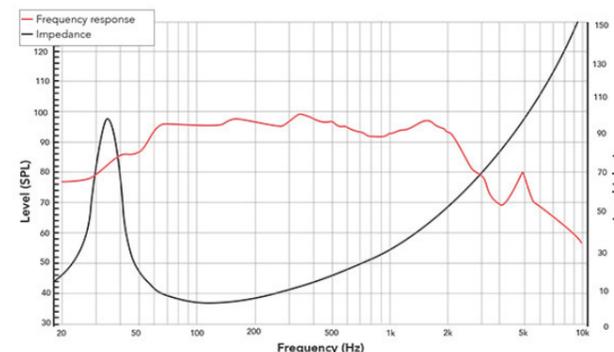

Frequency response measured on IAC baffle

2D drawing

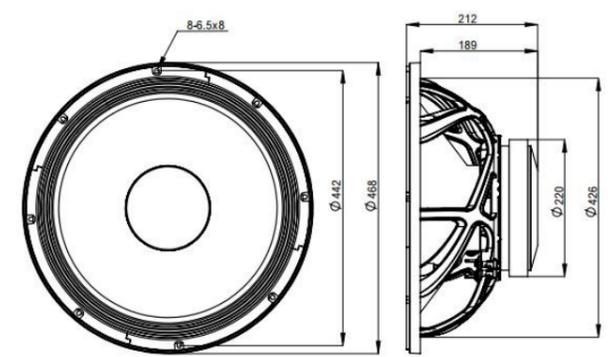

18" 181XR

Sub-woofer



Key features:

- CONE EXCURSION 56MM !! PATENTED DESIGN.
- 1 DEMODULATION COPPER RING, POWERFUL AND INNOVATIVE MOTOR STRUCTURE, INNOVATIVE VENTING SYSTEM
- DOUBLE SPIDER WITH SPACER, WOVEN-IN TINSEL WIRES, REINFORCED CONE EDGE.

Design notes:

Designed based upon the 18XR, the 181XR was designed for professional audio segment. The basic characters and design concept remains the same for the 181XR. We have used newly designed 4 roll waterproof fabric surround that fully supports the high cone excursions of this incredible loud-speaker. The target was to push the envelope of possibilities. We are giving you a product that will not limit you to achieve even your

wildest sub-woofer dreams.

Motor Design

The magnetic design incorporates large neodymium magnets placed along the voice coil winding. This has allowed us to push the cone excursion to 44mm peak to peak. Unique gap venting ensures good air circulation and greatly improves the reliability of this driver. We have also developed a new technique for manufacturing deep copper


caps.

The design further utilizes dual, uncommonly large, spiders, spaced with spacer, hot-pressed tinsel wires onto the top spider, reinforced cone edge, reinforced surround to cone joint, reinforced spider to basket joints, etc.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 18"	Resonant frequency: 30 Hz	Surround Material: Fabric	181XR-X4 ohm-350
Rated Impedance: 4 ohm	Re: 3.3 ohm	Cone material: Paper	
Power handling	Qes: 0.24	Spider: Nomex	
AES Power: 1200 watts	Qms: 13.2	Plate thickness: 56 mm	
Program Power: 2400 watts	Qts: 0.23	Peak to peak linear cone displacement: 44.4 mm	Recone kits:
Peak Power: 4800 watts	Vas: 195 liters	Overall diameter: 467.6 mm	RC181XR-X-350
Voice Coil	Sd: 1256.6 cm ²	Bolt circle diameter: 442 mm	
Diameter: 4 in.	Sensitivity: 97 dB	Baffle cutout dia.: 422 mm	In many cases REDCATT
Winding wire: Copper	Mms: 306 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 28.3	Depth (flange to rear): 257.2 mm	16 ohms versions. Indicate
Winding height: 22 mm	Le: 1.3 mH	Net weight: 14.5kg	what impedance do you need
			in your request.

Frequency response & Impedance

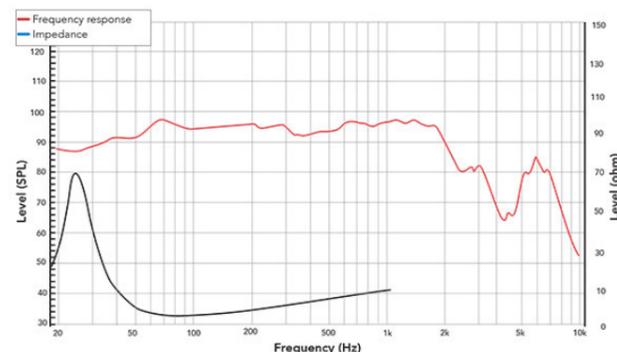

Frequency response measured on IAC baffle

2D drawing

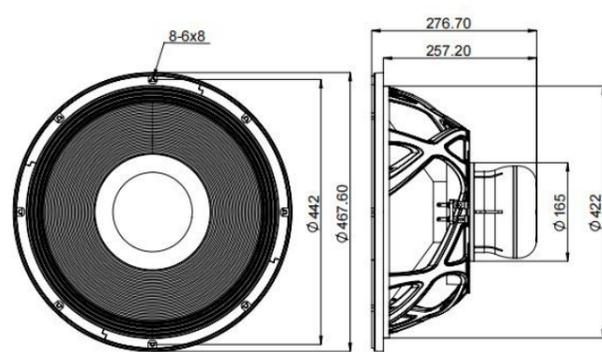

18" 181NPW

Woofer



Key features:

- 5.3" DIAMETER VOICE COIL, HIGH POWER HANDLING
- IMPROVED COIL AND MAGNET AIR-VENTILATION SYSTEM, HIGH TEMP. CAPABLE VOICE COIL WINDING
- CARBON FIBER REINFORCED PAPER CONE, TRIPLE SILICONE SPIDER

Design notes:

The 181NPW is a high efficiency, (95 dB 1watt / 1 meter) 18-inch woofer with incredibly linear frequency response characteristics, extreme high power handling capability while generating low harmonic distortion artifacts. The 181NPW uses a lightweight carbon fiber loaded cone assembly along with a high excursion triple roll constant geometry surround. This combination provides remarkable strength, high efficiency and a peak to peak maximum

excursion of 30.5mm.

Power Handling


At the core of the 181NPW is its voice coil technology featuring a composite Polyimide former material capable of withstanding peak temperatures in excess of 350C, well beyond the thermal requirements of modern professional audio systems. The 181NPW delivers incredible performance.

REDCATT has implemented a triple layer/silicone spider design to ensure long term shape memory, consistency and diminish anomalies associated with spider deterioration.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 18"	Resonant frequency: 28 Hz	Surround Material: Fabric	181NPW-X4 ohm-099
Rated Impedance: 4 ohm	Re: 3.2 ohm	Cone material: Paper	
Power handling	Qes: 0.25	Spider: Nomex	
AES Power: 1500 watts	Qms: 15.8	Plate thickness: 15 mm	
Program Power: 3000 watts	Qts: 0.25	Peak to peak linear cone displacement: 30.4 mm	Recone kits:
Peak Power: 6000 watts	Vas: 167.7 liters	Overall diameter: 468 mm	RC181NPWX-099
Voice Coil	Sd: 1225.4 cm ²	Bolt circle diameter: 442 mm	
Diameter: 5.3 in.	Sensitivity: 95 dB	Baffle cutout dia.: 426 mm	In many cases REDCATT
Winding wire: Copper	Mms: 391.2 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 29.7	Depth (flange to rear): 210 mm	16 ohms versions. Indicate
Winding height: 32.8 mm	Le: 1.76 mH	Net weight: 13.9kg	what impedance do you need
			in your request.

Frequency response & Impedance

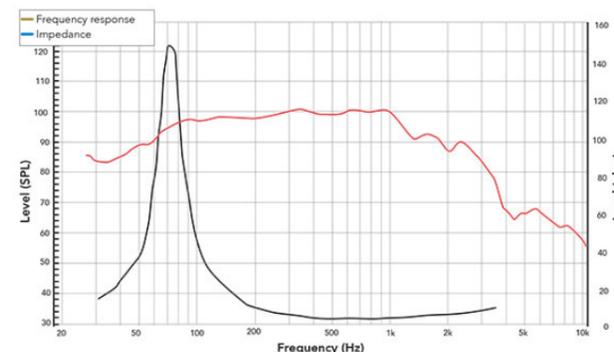

Frequency response measured on IAC baffle

2D drawing

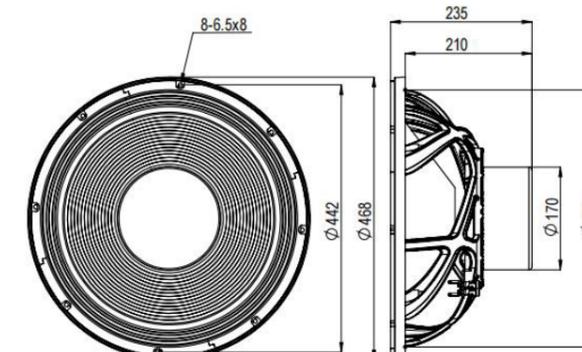

21" | 21XR

Woofer



Key features:

- LINEAR CONE EXCURSION 60MM PEAK TO PEAK !!
- UNPARALLEL LOW DISTORTION AT LOW FREQUENCIES
- PATENTED DESIGN, INNOVATIVE MAGNETIC STRUCTURE & VENTING SYSTEM

Design notes:

The 21XR is a high efficiency, (96 dB 1 watt / 1 meter) 21-inch woofer with incredibly linear frequency response characteristics. Our new and patented ground up motor design is a new approach to high-excursion woofers. The voice coil winding is always in the magnetic gap that is extremely wide. This feature ensures extremely low distortion across whole working range of this unique driver.

Motor Design

The magnetic design incorporates large neodymium magnets placed along the voice coil winding. This has allowed us to push the cone excursion to 50mm peak to peak. Unique gap venting ensures good air circulation and greatly improves the reliability of this driver. We have also developed a new technique for manufacturing deep copper caps that are implemented in this design and covering the whole voice coil move-


ment..

The design further utilizes triple, uncommonly large, spiders, spaced with spacers, hot-pressed tinsel wires onto the top spider, reinforced cone edge, reinforced surround to cone joint, reinforced spider to basket joints, etc.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 21"	Resonant frequency: 32.3 Hz	Surround Material: Fabric	21XR-X8 ohm-347A
Rated Impedance: 8 ohm	Re: 4.5 ohm	Cone material: Paper	
Power handling	Qes: 0.51	Spider: Nomex	
AES Power: 1800 watts	Qms: 16.79	Plate thickness: 67 mm	
Program Power: 3600 watts	Qts: 0.5	Peak to peak linear cone displacement: 49.6 mm	Recone kits:
Peak Power: 7200 watts	Vas: 152.79 liters	Overall diameter: 549 mm	RC21XRX-347A
Voice Coil	Sd: 1662 cm ²	Bolt circle diameter: 525 mm	
Diameter: 5.3 in.	Sensitivity: 96 dB	Baffle cutout dia.: 503 mm	In many cases REDCATT
Winding wire: Copper	Mms: 488.58 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 29.37	Depth (flange to rear): 287 mm	16 ohms versions. Indicate
Winding height: 21 mm	Le: 0.65 mH	Net weight: 23.8kg	what impedance do you need

Frequency response & Impedance

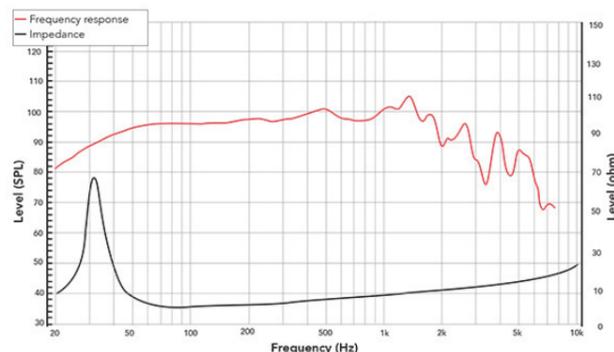

Frequency response measured on IAC baffle

2D drawing

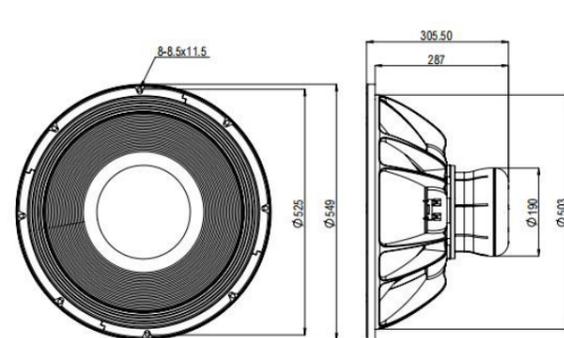

21" | 21NPW

Woofer



Key features:

- 5.3" DIAMETER VOICE COIL
- 3600 WATTS PROGRAM POWER HANDLING
- TRIPLE SILICONE SPIDER, HEAVY DUTY FIBER REINFORCED CONE WITH LARGE SURROUND

Design notes:

The 21NPW is a high efficiency, (96 dB 1 watt / 1 meter) 21-inch woofer with incredibly linear frequency response characteristics, extreme high power handling capability while generating low harmonic distortion artifacts. The 21NPW uses a lightweight carbon fiber loaded cone assembly along with a high excursion triple roll constant geometry surround. This combination provides remarkable strength, high efficiency and a peak to peak maximum

excursion of 31mm.

Power Handling


At the core of the 21NPW is it's voice coil technology featuring a composite Polyimide former material capable of withstanding peak temperatures in excess of 350C, well beyond the thermal requirements of modern professional audio systems. The 21NPW delivers incredible performance.

REDCATT has implemented a triple layer/silicone spider design to ensure long term Fs memory, consistency and diminish anomalies associated with spider deterioration.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 21"	Resonant frequency: 35 Hz	Surround Material: Fabric	21NPW-X4 ohm-018
Rated Impedance: 4 ohm	Re: 3.0 ohm	Cone material: Paper	
Power handling	Qes: 0.33	Spider: Nomex	
AES Power: 1800 watts	Qms: 11.12	Plate thickness: 15 mm	
Program Power: 3600 watts	Qts: 0.32	Peak to peak linear cone displacement: 31 mm	Recone kits:
Peak Power: 7200 watts	Vas: 149 liters	Overall diameter: 546 mm	RC21NPWX-018
Voice Coil	Sd: 1662 cm ²	Bolt circle diameter: 520 mm	
Diameter: 5.3 in.	Sensitivity: 96 dB	Baffle cutout dia.: 496 mm	In many cases REDCATT
Winding wire: Copper	Mms: 514 grams	Number of mounting holes: 8	produces 4 ohms, 8 ohms and
Former: Glass Fiber	Bl: 32.9	Depth (flange to rear): 245 mm	16 ohms versions. Indicate
Winding height: 33 mm	Le: 1.14 mH	Net weight: 14.85kg	what impedance do you need

Frequency response & Impedance

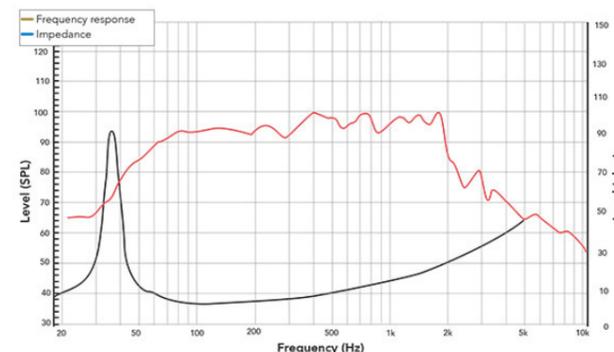

Frequency response measured on IAC baffle

2D drawing

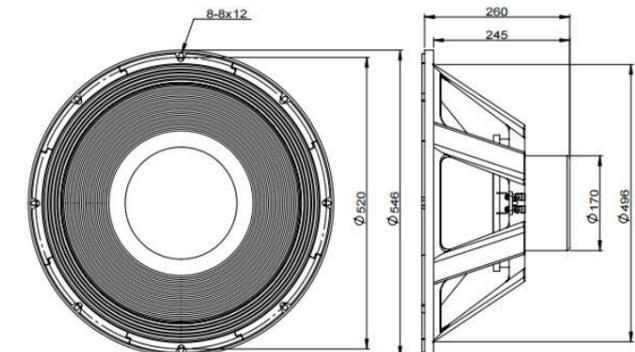



**COAXIAL
TRANSDUCERS**



6"**CX6F140****Coaxial Ferrite-Neodymium Driver****Key features:**

- LF AND HF COMBINED MAGNETIC CIRCUIT
- COMPACT, BUT POWERFUL SPEAKER
- MAGNETIC CIRCUIT COMBINING FERRITE AND NEODYMIUM MAGNETS

Design notes:

The CX6F-140F is a high efficiency, (93dB 1watt / 1 meter) 6.5-inch coaxial speaker with very linear frequency response characteristics and high power handling capability. The mid-woofer utilizes REDCATT developed paper pulp cone that has proven its performance in many of our successful designs. The HF section was designed around our most successful dome assembly as used in 140FCD. The mini

waveguide is CNC machined from single piece of aluminum, given the whole assembly incredible precision. The combination of used materials with our state of the art quality production yields in well performing driver even in the most demanding extreme conditions.

Magnetic circuit design REDCATT engineers have developed

ferrite-neodymium based magnetic circuit, capable of delivering the highest level of performance in a small form factor. The combination of ferrite and neodymium delivers an excellent magnetic performance. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability. Aluminum demodulation ring is assembled in the HF section.

Specifications:**General specs (LF/HF)**

Nom. Diameter: 6"
Rated Imp.: 8 ohm

Power handling (LF/HF)

AES Power: 100/30 watts
Program Power: 200/60 watts
Peak Power: 400/120 watts

Voice Coil (LF/HF)

Diameter: 1.75/1.4 in.
Winding wire: CCAR
Former: Glass Fiber/
Winding height: 10/2.5 mm

T/S Parameters (LF/HF)

Resonant frequency: 121/1000 Hz
Re: 5.4/5.5
Qes: 0.52
Qms: 4.73
Qts: 0.47
Vas: 4.4 liters
Sd: 141 cm²
Sensitivity: 93.8/101
Mms: 10.9 grams
Bl: 9.27
Le: 0.45 mH

Design details (LF/HF)


Surround Material: Fabric/Poly-
Cone/ dome material: Paper/Polymer
Spider: Nomex/n/a
Plate thickness: 6 mm
Peak to peak linear cone displacement: 9.2 mm
Overall diameter: 165.2 mm
Bolt circle diameter: 157.5 mm
Baffle cutout dia.: 144 mm
Number of mounting holes: 8
Depth (flange to rear): 85.8 mm
Net weight: 2.1kg

Ordering codes:


CX6F140X-361C

Recone kits:

In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

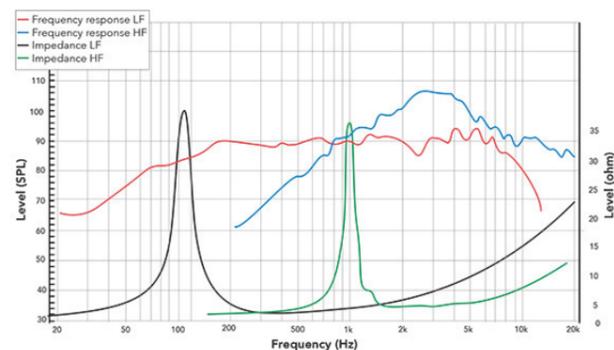Frequency response & Impedance

Frequency response measured on IAC baffle

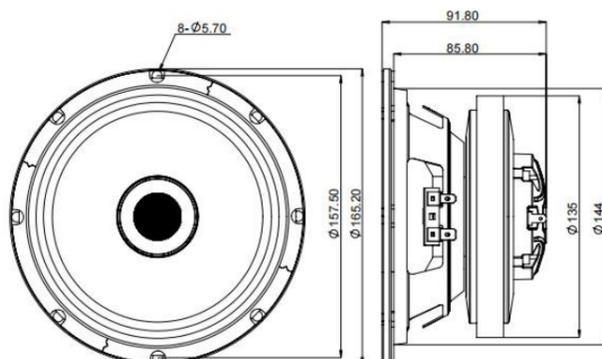2D drawing

info@redcatt.net

www.redcatt.net

8"**CX8F140****Coaxial Ferrite-Neodymium Driver****Key features:**

- LF AND HF INTEGRATED FERRITE-NEODYMIUM MAGNETIC CIRCUIT
- ALUMINUM SYMMETRICAL HORN
- GOOD OFF-AXES FREQUENCY RESPONSE

Design notes:

The CX8F-140F is a high efficiency, (92.5dB 1watt / 1 meter) 8-inch coaxial speaker with very linear frequency response characteristics and high power handling capability. The mid-woofer utilizes REDCATT developed paper pulp cone that has proven its performance in many of our successful designs. The HF section was designed around our most successful dome assembly as used in 140FCD and has

integrated symmetrical aluminum horn. The combination of used materials with our state of the art quality production yields in well performing driver even in the most demanding and extreme weather conditions.

Magnetic circuit design REDCATT engineers have developed ferrite-neodymium based magnetic circuit, capable of delivering the

highest level of performance in a small form factor. The combination of ferrite and neodymium delivers an excellent magnetic performance. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability. Aluminum demodulation ring is assembled in the HF section.

Specifications:**General specs (LF/HF)**

Nom. Diameter: 8"
Rated Imp.: 8 ohm

Power handling (LF/HF)

AES Power: 150/30 watts
Program Power: 300/60 watts
Peak Power: 600/120 watts

Voice Coil (LF/HF)

Diameter: 2/1.4 in.
Winding wire: CCAW
Former: Glass Fiber/
Winding height: 12/2.5 mm

T/S Parameters (LF/HF)

Resonant frequency: 86/1000 Hz
Re: 5.6/5.5
Qes: 0.63
Qms: 9.06
Qts: 0.59
Vas: 10.7 liters
Sd: 213.8 cm²
Sensitivity: 92.44/103
Mms: 20.2 grams
Bl: 9.93
Le: 0.47 mH

Design details (LF/HF)


Surround Material: Fabric/Poly-
Cone/ dome material: Paper/Polymer
Spider: Nomex/n/a
Plate thickness: 8 mm
Peak to peak linear cone displacement: 11.4 mm
Overall diameter: 207 mm
Bolt circle diameter: 197.2 mm
Baffle cutout dia.: 178 mm
Number of mounting holes: 8
Depth (flange to rear): 107.5 mm
Net weight: 2.8KG

Ordering codes:


CX8F140X-374B

Recone kits:

In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

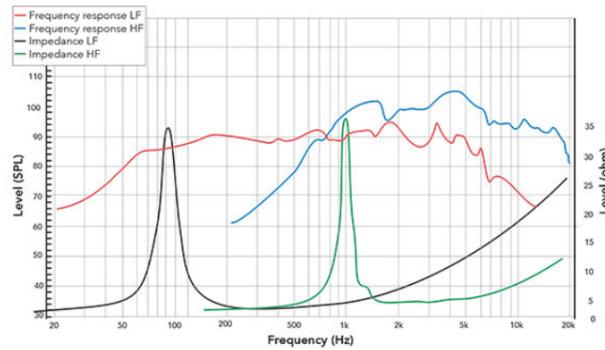Frequency response & Impedance

Frequency response measured on IAC baffle

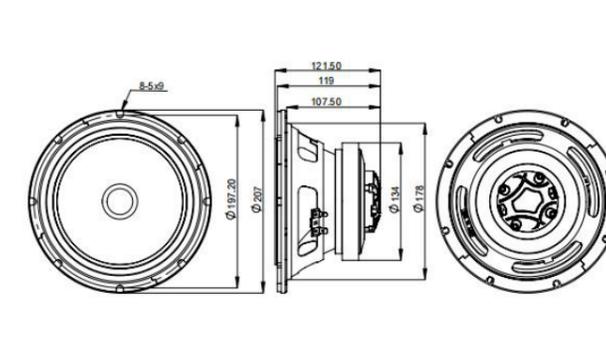2D drawing

info@redcatt.net

www.redcatt.net

10" CX10F140

Coaxial Ferrite-Neodymium Driver REDCAT



Key features:

- LF AND HF INTEGRATED FERRITE-NEODYMIUM MAGNETIC CIRCUIT
- ALUMINUM SYMMETRICAL HORN
- GOOD OFF-AXES FREQUENCY RESPONSE

Design notes:

The CX10F-140F is a high efficiency, (93.5dB 1watt / 1 meter) 8-inch coaxial speaker with very linear frequency response characteristics and high power handling capability. The mid-woofer utilizes REDCATT developed paper pulp cone that has proven its performance in many of our successful designs. The HF section was designed around our most successful dome assembly as used in 140FCD and has

integrated symmetrical aluminum horn. The combination of used materials with our state of the art quality production yields in well performing driver even in the most demanding and extreme weather conditions.


Magnetic circuit design REDCATT engineers have developed ferrite-neodymium based magnetic circuit, capable of delivering the

highest level of performance in a small form factor. The combination of ferrite and neodymium delivers an excellent magnetic performance. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability. Aluminum demodulation ring is assembled in the HF section.

Specifications:


General specs (LF/HF)	T/S Parameters (LF/HF)	Design details (LF/HF)	Ordering codes:
Nom. Diameter: 10"	Resonant frequency: 75/1000 Hz	Surround Material: Fabric/Poly-	CX10F140X-375B
Rated Imp.: 8 ohm	Re: 5.5/5.5	Cone/ dome material: Paper/Polymer	
Power handling (LF/HF)	Qes: 0.75	Spider: Nomex/n/a	
AES Power: 200/30 watts	Qms: 5.03	Plate thickness: 8 mm	
Program Power: 400/60 watts	Qts: 0.65	Peak to peak linear cone displacement: 11.6 mm	Recone kits:
Peak Power: 800/120 watts	Vas: 24.2 liters	Overall diameter: 256 mm	
Voice Coil (LF/HF)	Sd: 346.4 cm ²	Bolt circle diameter: 245 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Diameter: 2/1.4 in.	Sensitivity: 93.4/105	Baffle cutout dia.: 231.5 mm	
Winding wire: CCAW	Mms: 31.2 grams	Number of mounting holes: 8	
Former: Glass Fiber/	Bl: 10.36	Depth (flange to rear): 120.7 mm	
Winding height: 12/2.5 mm	Le: 0.49 mH	Net weight: 3.1kg	

Frequency response & Impedance

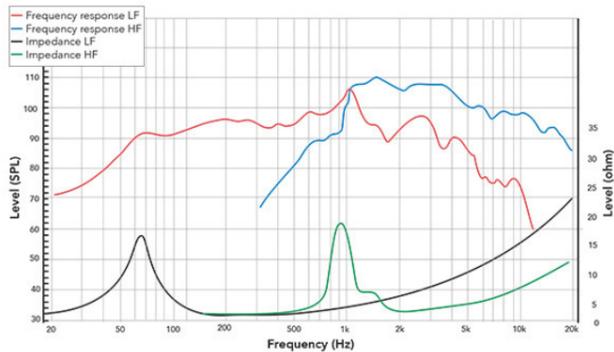

Frequency response measured on IAC baffle

2D drawing

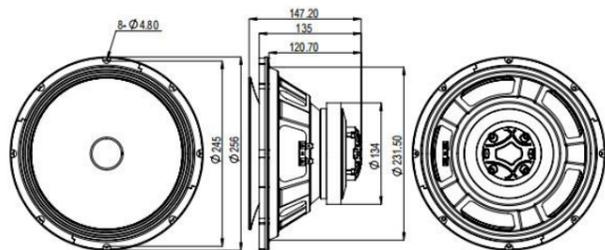

12" CX12F140

Coaxial Ferrite-Neodymium Driver REDCAT



Key features:

- INTEGRATED ALUMINUM SYMMETRICAL HORN
- HIGH SENSITIVITY

Design notes:

The CX12F-140F is a high efficiency, (95 dB 1watt / 1 meter) 12-inch coaxial speaker with very linear frequency response characteristics and high power handling capability. The mid-woofer utilizes REDCATT developed paper pulp cone that has proven its performance in many of our successful designs. The HF section was designed around our most successful dome assembly as used in 140FCD and has

integrated symmetrical aluminum horn. The combination of used materials with our state of the art quality production yields in well performing driver even in the most demanding and extreme weather conditions.


Magnetic circuit design REDCATT engineers have developed ferrite-neodymium based magnetic circuit, capable of delivering the

highest level of performance in a small form factor. The combination of ferrite and neodymium delivers an excellent magnetic performance. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability. Aluminum demodulation ring is assembled in the HF section.

Specifications:


General specs (LF/HF)	T/S Parameters (LF/HF)	Design details (LF/HF)	Ordering codes:
Nom. Diameter: 12"	Resonant frequency: 56/1000 Hz	Surround Material: Fabric/Poly-	CX12F140X-376B
Rated Imp.: 8 ohm	Re: 5.5/5.5	Cone/ dome material: Paper/Polymer	
Power handling (LF/HF)	Qes: 0.54	Spider: Nomex/n/a	
AES Power: 200/30 watts	Qms: 6.53	Plate thickness: 8 mm	
Program Power: 400/60 watts	Qts: 0.5	Peak to peak linear cone displacement: 15.2 mm	Recone kits:
Peak Power: 800/120 watts	Vas: 63.9 liters	Overall diameter: 320 mm	
Voice Coil (LF/HF)	Sd: 530.93 cm ²	Bolt circle diameter: 302 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Diameter: 2/1.4 in.	Sensitivity: 95.2/105	Baffle cutout dia.: 281 mm	
Winding wire: Copper	Mms: 50.3 grams	Number of mounting holes: 8	
Former: Glass Fiber/	Bl: 13.4	Depth (flange to rear): 142.5 mm	
Winding height: 15.8/2.5 mm	Le: 0.7 mH	Net weight: 5.3Kg	

Frequency response & Impedance

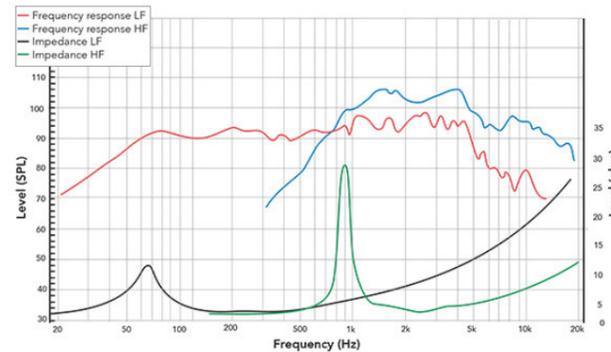

Frequency response measured on IAC baffle

2D drawing

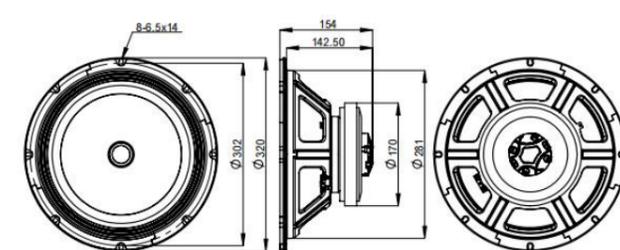

1" | 16TN

Neodymium Tweeter



Key features:

- SMALL SYSTEMS WITH LIMITED Baffle SPACE
- WORKING RANGE UP TO 20KHZ
- LIGHTWEIGHT. IDEAL FOR PORTABLE PRODUCTS.

Design notes:

The 16TN tweeter was designed with a small form factor in mind. It finds its best use in applications where the baffle space is limited. It is a high performance, high frequency device with extended HF frequency range well over 20kHz. .

Diaphragm Assembly
The driver features a 16mm Poly-silk diaphragm formed as single piece with

suspension. The dome rests on plastic carrier that also consists two mounting holes.

The dome is carefully attached to a 16mm aluminum former voice coil. Further, a common sized connector is used. Optionally, the connector can be replaced by another type that would suit the best your application, or completely replaced by conventional


fast-on terminals.

Magnetic system uses high-temperature grade neodymium, ensuring the longevity of this tweeter.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 2000 Hz	Dome Material: Silk	16TNX-182
Rated Impedance: 4 ohm	Nominal sensitivity 82 dB	Surround material: Silk	
Power handling	Re: 4.0 ohm	Magnet material: Neodymium	
AES Power: 5 watts	Le: n/a mH	Overall diameter: 26 mm	
Program Power: 10 watts		Bolt circle diameter: 31.8 mm	Recone kits: RC16TNX-182
Peak Power: 20 watts		Throat diameter: n/a mm	
Voice Coil		Number of mounting holes: 2	
Diameter: 0.6 in.		Depth (front to rear): 13.5 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAW		Net weight: 25g	
Former: Aluminum			

Frequency response & Impedance

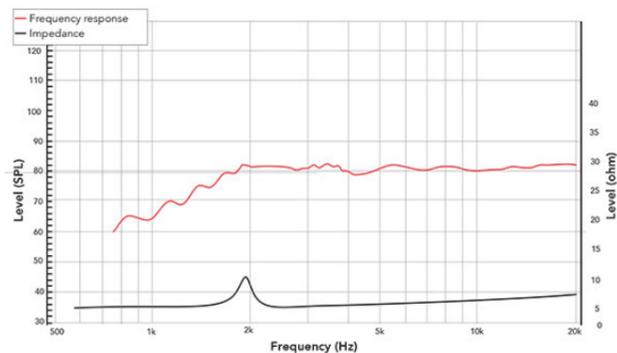


Frequency response measured on IAC baffle

2D drawing

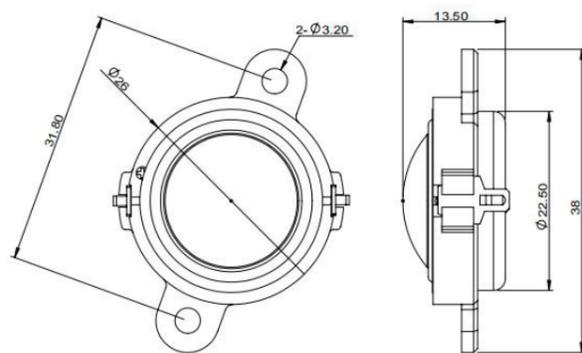

1" | 20TN

Neodymium Tweeter

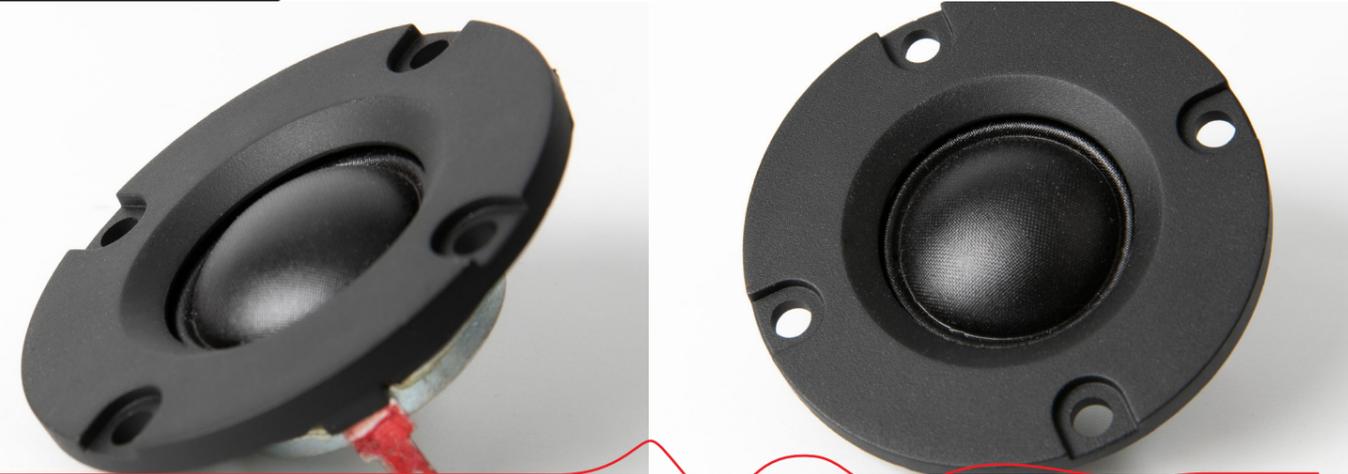

Key features:

- COMPACT SIZE
- INTEGRATED WAVEGUIDE
- EASY CROSSOVER DESIGN POSSIBLE

Design notes:

The 20TN tweeter has a lower resonance frequency, making the crossover design a non-complicated task. The tweeter comes with a small waveguide, but based upon request, the tweeter can be also delivered as a bare tweeter and assembled with your own waveguide.


The best application is in tabletop studio monitors, prosumer products,

bookshelf speakers, TV bars, micro line-arrays, etc.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 1700 Hz	Dome Material: Teton	20TNX-383
Rated Impedance: 8 ohm	Nominal sensitivity 87 dB	Surround material: Teton	
Power handling	Re: 7.2 ohm	Magnet material: Neodymium	
AES Power: 10 watts	Le: n/a mH	Overall diameter: 50.5 mm	
Program Power: 20 watts		Bolt circle diameter: 44 mm	Recone kits: RC20TNX-383
Peak Power: 40 watts		Throat diameter: n/a mm	
Voice Coil		Number of mounting holes: 4	
Diameter: 0.8 in.		Depth (front to rear): 19.65 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAW		Net weight: 25g	
Former: Aluminum			

Frequency response & Impedance

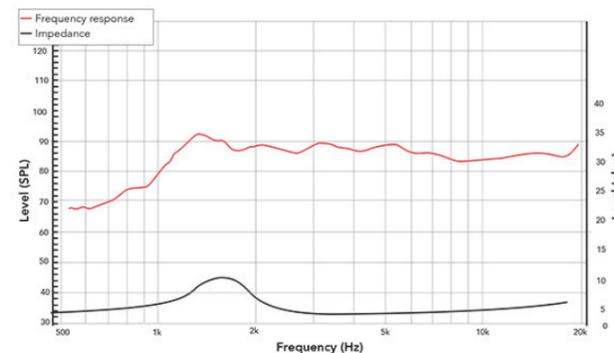

Frequency response measured on IAC baffle

2D drawing

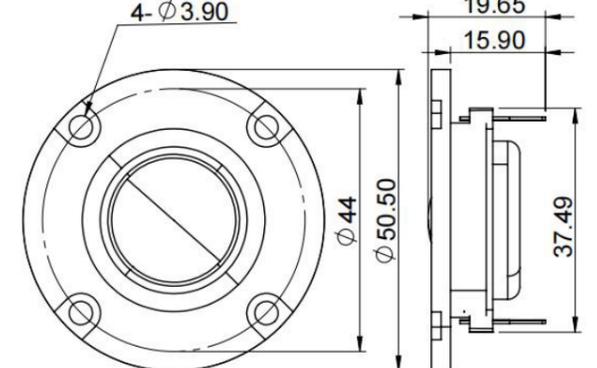

1" | 201TN

Neodymium Tweeter



Key features:

- DESIGN CAN BE EASILY IMPLEMENTED IN YOUR OWN WAVEGUIDE
- WIDE BAND FREQUENCY RESPONSE

Design notes:


The 201TN tweeter has a lower resonance frequency, making the crossover design a non-complicated task. The tweeter is delivered as a „bare“ tweeter and shall be assembled with your own waveguide or to a baffle with integrated waveguide.

The best application is in tabletop studio monitors, prosumer products, bookshelf speakers, TV bars, micro line-arrays, etc.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 1900 Hz	Dome Material: Tetoron	201TNX-399
Rated Impedance: 8 ohm	Nominal sensitivity: 86 dB	Surround material: Tetoron	
Power handling	Re: 7.2 ohm	Magnet material: Neodymium	
AES Power: 10 watts	Le: n/a mH	Overall diameter: 31.5 mm	
Program Power: 20 watts		Bolt circle diameter: 43.5 mm	Recone kits: RC201TNX-399
Peak Power: 40 watts		Throat diameter: n/a mm	
Voice Coil		Number of mounting holes: 2	
Diameter: 0.8 in.		Depth (front to rear): 19.7 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAW		Net weight: 40g	
Former: Aluminum			

Frequency response & Impedance

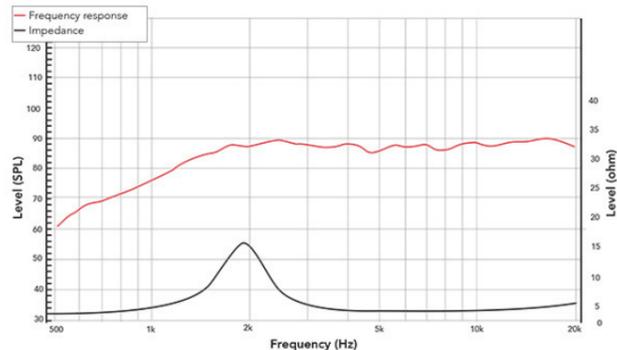

Frequency response measured on IAC baffle

2D drawing

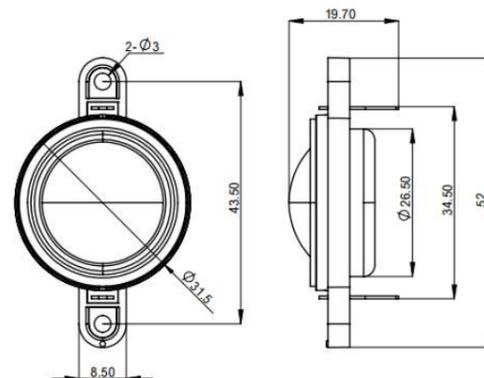

1" | 33TN

Neodymium Tweeter



Key features:

- SMOOTH FREQUENCY RESPONSE, WORKING RANGE FROM 1,200HZ ~ 25KHZ
- HIGH POWERHANDLING
- VERY COMPACT SIZE, SHALLOW DEPTH

Design notes:

The 33TN tweeter was developed for system applications where high SPL and high power handling is required. The tweeter is supplied as „bullet“ in general terms, however based upon a request, our engineers can recommend or design waveguide for your application.

The tweeter sports large surround and unusually tall dome. This combination provides excellent low frequency behaviour and smooth frequency response.

The magnetic structure utilizes high grade neodymium magnets and u-cup style steel. Overall the structure delivers very high performance with consistent BL field.


Connection is made with solder lugs. Based upon request, we can deliver this tweeter with soldered wire harness as per your specifications.

Intended applications are array systems, hi-SPL 2-way and multi-way speaker systems and automotive applications.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 1200 Hz	Dome Material: silk	33TNX-410B
Rated Impedance: 8 ohm	Nominal sensitivity: 92 dB	Surround material: silk	
Power handling	Re: 5.5 ohm	Magnet material: Neodymium	
AES Power: 10 watts	Le: n/a mH	Overall diameter: 48 mm	
Program Power: 20 watts		Bolt circle diameter: n/a mm	Recone kits: RC33TNX-410B
Peak Power: 40 watts		Throat diameter: n/a mm	
Voice Coil		Number of mounting holes: n/a	
Diameter: 1 in.		Depth (front to rear): 20.7 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAW		Net weight: 70g	
Former: Aluminum			

Frequency response & Impedance

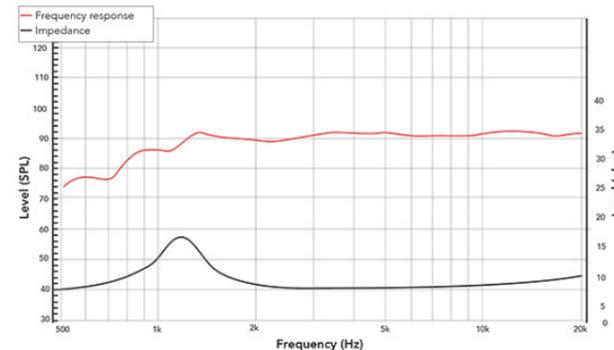

Frequency response measured on IAC baffle

2D drawing

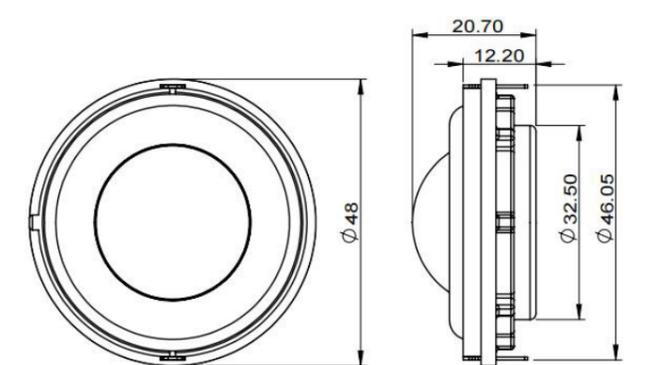

1" | 25TN

Neodymium Tweeter



Key features:

- VERY HIGH SENSITIVITY
- LOW RESONANCE FREQUENCY
- HIGH POWER HANDLING

Design notes:

The 25TN tweeter has a very low resonance frequency, making it possible to work with larger sized mid-woofers.

The tweeter has a designed-in acoustical phase plug, that ensures the off-axis good response and also increases acoustical pressure. Integrated small waveguide makes the usage of this tweeter very easy.

Dual neodymium high-temperature grade neodymium magnets deliver a high-density flux field for the CCAW coil with a minimum amount of flux modulation.


The tweeter has well-balanced performance and very low harmonic distortion even at high powers. This tweeter can be used in all application where high SPL and low Fs is re-

quired. Line-array systems, Hi-Fi center channels, 2-way and multi-way systems.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 1250 Hz	Dome Material: silk	25TNX-386B
Rated Impedance: 4 ohm	Nominal sensitivity 91 dB	Surround material: silk	
Power handling	Re: 3.4 ohm	Magnet material: Neodymium	
AES Power: 15 watts	Le: n/a mH	Overall diameter: 54.5*54.5 mm	
Program Power: 30 watts		Bolt circle diameter: 58 mm	Recone kits:
Peak Power: 60 watts		Throat diameter: n/a mm	RC25TNX-386B
Voice Coil		Number of mounting holes: 4	
Diameter: 1 in.		Depth (front to rear): 25.55 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAW		Net weight: 84g	
Former: Aluminum			

Frequency response & Impedance

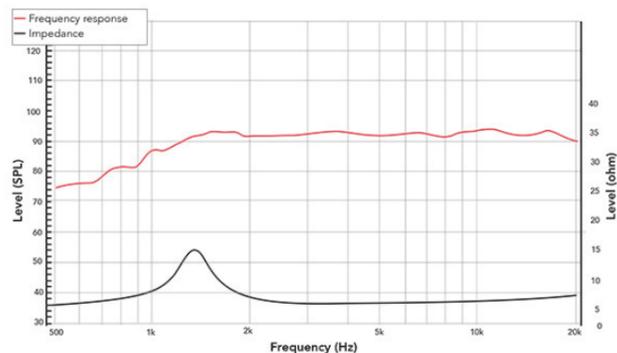

Frequency response measured on IAC baffle

2D drawing

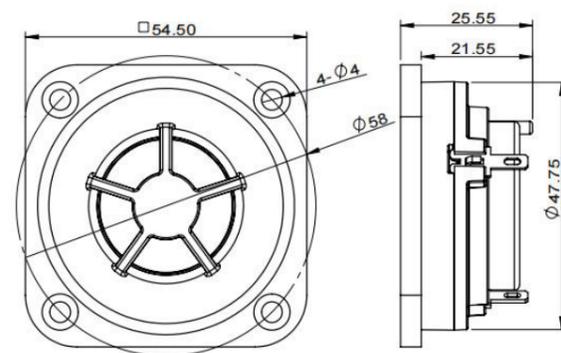

info@redcatt.net

www.redcatt.net

1" | 25TF

Ferrite Tweeter



Key features:

- EASY IMPLEMENTATION, INTEGRATED WAVEGUIDE
- WEATHER SEALED
- BALANCED FREQUENCY RESPONSE, LOW RESONANT FREQUENCY

Design notes:

25TF ferrite based tweeter was design for high quality audio applications. It sports aluminum dome, carefully attached to poly-silk surround. Furthermore, the magnetic system and dome sub-assembly is inbuilt into carrier that is later further assembled with our waveguide.

The magnetic circuit delivers robust and consistent B field. Its design has been FEM optimized and features

small resonant chamber. All metal parts are coated for weather protection.


The dome is carefully attached to CCAW winding voice coil, wound on a Kapton former. Our precision adhesive dispensing ensures consistency and reliability of all our products.

The best application of this device is in studio monitors, 2-way Hi-Fi systems as well as outdoor products.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 1500 Hz	Dome Material: Aluminum	25TFX-431A
Rated Impedance: 4 ohm	Nominal sensitivity 90 dB	Surround material: silk	
Power handling	Re: 3.6 ohm	Magnet material: Ferrite	
AES Power: 10 watts	Le: n/a mH	Overall diameter: 103.5 mm	
Program Power: 20 watts		Bolt circle diameter: 93.5 mm	Recone kits:
Peak Power: 40 watts		Throat diameter: n/a mm	RC25TFX-431A
Voice Coil		Number of mounting holes: 4	
Diameter: 1 in.		Depth (front to rear): 34.2 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAW		Net weight: 524g	
Former: Aluminum			

Frequency response & Impedance

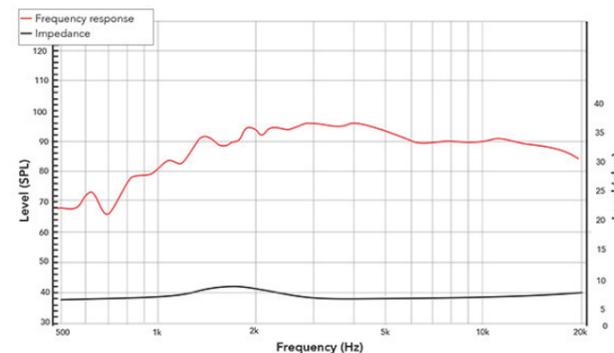

Frequency response measured on IAC baffle

2D drawing

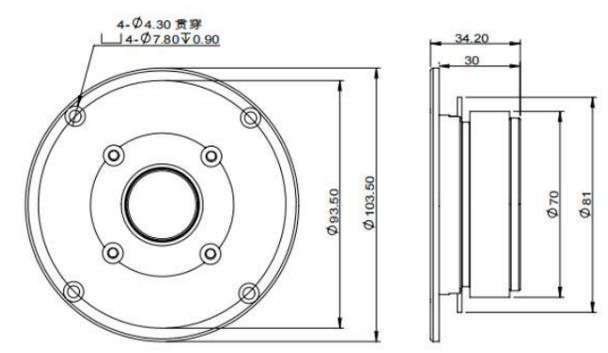

info@redcatt.net

www.redcatt.net



1" | 25TF

Ferrite Tweeter



Key features:

- LOW RESONANT FREQUENCY, HIGH SPL
- SMOOTH FREQUENCY RESPONSE
- EASY CROSSOVER DESIGN POSSIBLE

Design notes:

25TF ferrite based tweeter was design for high quality audio applications. It sports single piece poly-silk dome, formed together with surround. Furthermore, the magnetic system and dome sub-assembly is inbuilt into carrier that is later further assembled with our waveguide.

The magnetic circuit delivers robust and consistent B field. Its design has been FEM optimized and features

small resonant chamber. All metal parts are coated for weather protection.

The dome is carefully attached to CCAW winding voice coil, wound on a Kapton former. Our precision adhesive dispensing ensures consistency and reliability of all our products.

This version of 25TF style tweeter shares all components with aluminum dome version 25TF. The difference is only the dome itself. While

aluminum dome delivers crisp HF, the poly-silk dome is dampened in the high frequencies and has a smoother roll off. Each version has its own application, that perhaps depends on personal preferences of the audio engineer.

The best application of this device is in studio monitors, 2-way Hi-Fi systems as well as outdoor products.

Specifications:

General specs

Nominal Diameter: 1"
Rated Impedance: 4 ohm

Power handling

AES Power: 10 watts
Program Power: 20 watts
Peak Power: 40 watts

Voice Coil

Diameter: 1 in.
Winding wire: CCAW
Former: Aluminum

T/S Parameters

Resonant frequency: 1000 Hz
Nominal sensitivity: 90 dB
Re: 3.8 ohm
Le: n/a mH

Design details

Dome Material: silk
Surround material: silk
Magnet material: Ferrite
Overall diameter: 103.5 mm
Bolt circle diameter: 93.5 mm
Throat diameter: n/a mm
Number of mounting holes: 4
Depth (front to rear): 34.2 mm
Net weight: 524g

Ordering codes:


25TFX-431B

Recone kits:

RC25TFX-431B


In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

Frequency response & Impedance

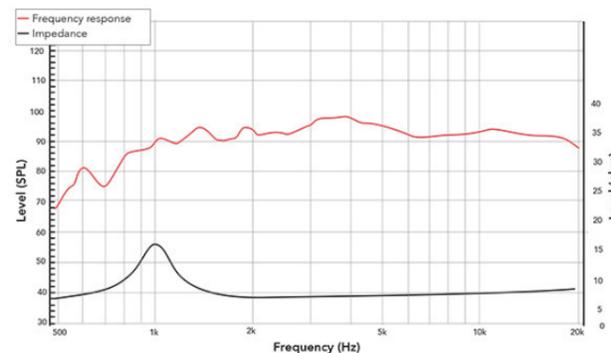

Frequency response measured on IAC baffle

2D drawing

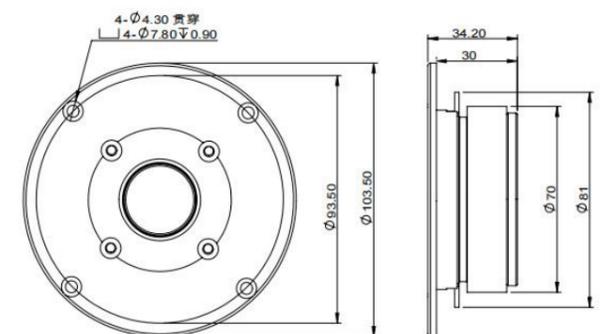

1" | 251TN

Neodymium Tweeter



Key features:

- WIDE BAND FREQUENCY RANGE
- LOW RESONANT FREQUENCY
- DESIGNED FOR LIMITED HEIGHT PRODUCTS, OR ARRAY APPLICATIONS

Design notes:

The 251TN tweeter delivers incredible performance. The aluminum dome excels in higher frequencies with bright, undistorted sound. The dome is carefully attached to a poly-silk composite surround.


fit narrow high applications, such as TV Bars. The tweeters can be also vertically stacked for array-like columns.

The tweeter is assembled on a small wave-guide, making a further application a breeze. The shape of the waveguide was carefully considered to

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 1500 Hz	Dome Material: Aluminum	251TNX-384
Rated Impedance: 4 ohm	Nominal sensitivity 90 dB	Surround material: silk	
Power handling	Re: 3.6 ohm	Magnet material: Neodymium	
AES Power: 10 watts	Le: n/a mH	Overall diameter: 70.5*54.3 mm	
Program Power: 20 watts		Bolt circle diameter: 63.5 mm	Recone kits: RC251TNX-384
Peak Power: 40 watts		Throat diameter: n/a mm	
Voice Coil		Number of mounting holes: 4	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Diameter: 1 in.		Depth (front to rear): 16.41 mm	
Winding wire: CCAW		Net weight: 62g	
Former: Aluminum			

Frequency response & Impedance

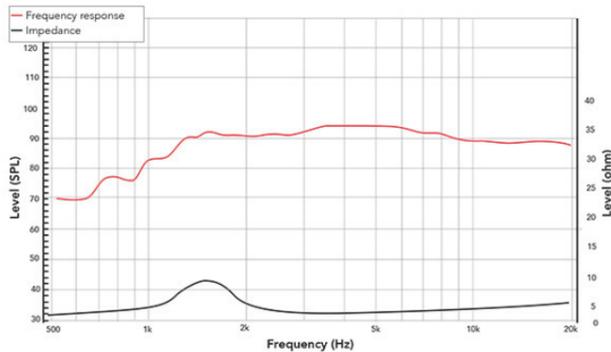

Frequency response measured on IAC baffle

2D drawing

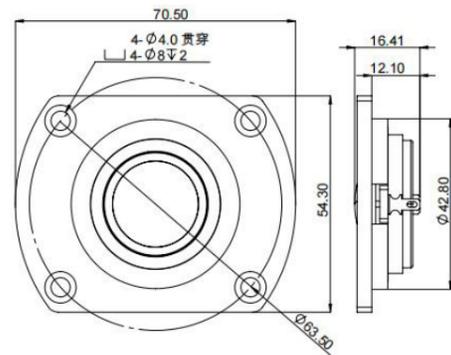

1" | 252TN

Neodymium Tweeter



Key features:

- HELMHOLTZ RESONANT CHAMBER
- COMPACT AND LIGHT-WEIGHT
- LOW FS

Design notes:

Introducing the 252TN, the latest innovation in our compact tweeter lineup. Engineered with a natural fiber silk dome, this tweeter is crafted from the ground up using advanced FEM tools, paired with a highly optimized neodymium-based magnetic circuit and a finely tuned Helmholtz resonant chamber.

The result? An exceptionally high-performing tweeter that excels in a variety

of applications, from smaller bookshelf speakers and portable systems to high-fidelity floor-standing towers and automotive audio. Its low resonant frequency enables a lower crossover point, enhancing overall sound quality.


Designed for versatility, the 252TN is fully weather-sealed, making it ideal for even the most demanding environments. Elevate your audio experience

with the 252TN, where cutting-edge technology meets outstanding performance.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 850 Hz	Dome Material: Teteron	252TNX-563A
Rated Impedance: 4 ohm	Nominal sensitivity 93 dB	Surround material: Teteron	
Power handling	Re: 3.5 ohm	Magnet material: Neodymium	
AES Power: 10 watts	Le: n/a mH	Overall diameter: 69.8 mm	
Program Power: 20 watts		Bolt circle diameter: 58.8 mm	Recone kits: RC252TNX-563A
Peak Power: 40 watts		Throat diameter: n/a mm	
Voice Coil		Number of mounting holes: 3	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Diameter: 1 in.		Depth (front to rear): 33.3 mm	
Winding wire: CCAW		Net weight: 0.1kg	
Former: Aluminum			

Frequency response & Impedance

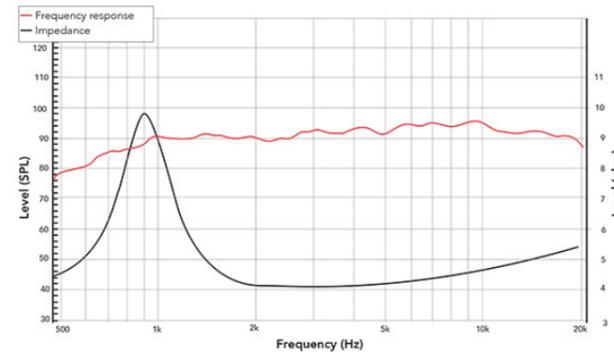

Frequency response measured on IAC baffle

2D drawing

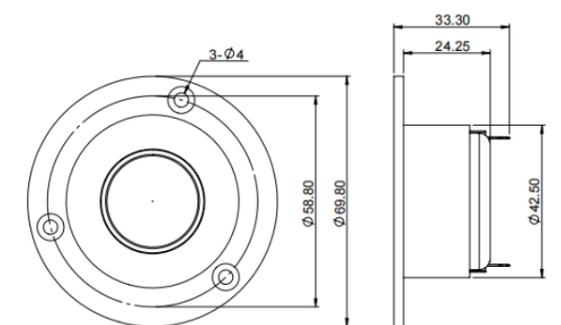

1"

25TF

Ferrite Tweeter



Key features:

- WORKING RANGE UP TO 30KHZ
- LOW RESONANT FREQUENCY
- TITANIUM NITRIDE DOME

Design notes:

The 25TF tweeter has incredibly linear frequency response characteristics, high power handling capability while generating ultra low harmonic distortion artifacts.

The 25TF Dome utilizes REDCATT in-house unique titanium coating technology. Nitride is extremely hard ceramic material. We deposit the nitride from both sides of the titanium dome. The

coated dome has dramatically improved flexural rigidity (aka stiffness), compared to the pure titanium dome. The coating has dramatic effect onto the distortion artifacts. The 3rd harmonic distortion stays below 0.05% in the working range. Extended high frequency response without major dome breakup modes and improved transient response are the other positive effects of REDCATT Titanium-Nitride Domes.

The 25TF has implemented FEM tuned rear resonant chamber. The chamber is improving the tweeter behavior at low frequencies and further lowering the harmonic distortion. All tweeter parts are bonded together using state of the art high temperature adhesives. Metal parts in the tweeter assembly are coated for extreme weatherization protection. This tweeter can be used in all applica-

Specifications:

General specs	
Nominal Diameter:	1"
Rated Impedance:	8 ohm
Power handling	
AES Power:	10 watts
Program Power:	20 watts
Peak Power:	40 watts
Voice Coil	
Diameter:	0.8 in.
Winding wire:	CCAW
Former:	Aluminum


T/S Parameters	
Resonant frequency:	1200 Hz
Nominal sensitivity	92 dB
Re:	5.7 ohm
Le:	n/a mH

Design details	
Dome Material:	Titanium
Surround material:	Foam
Magnet material:	Ferrite
Overall diameter:	122.5*96 mm
Bolt circle diameter:	108 mm
Throat diameter:	n/a mm
Number of mounting holes:	4
Depth (front to rear):	49.1 mm
Net weight:	787g

Ordering codes:	
	25TFX-065
Recone kits:	
	RC25TFX-065



In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

Frequency response & Impedance

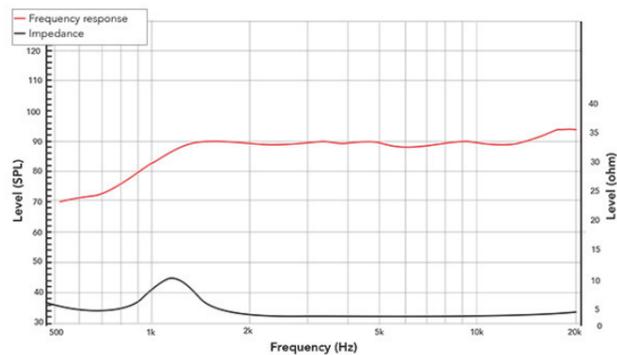


Frequency response measured on IAC baffle

2D drawing

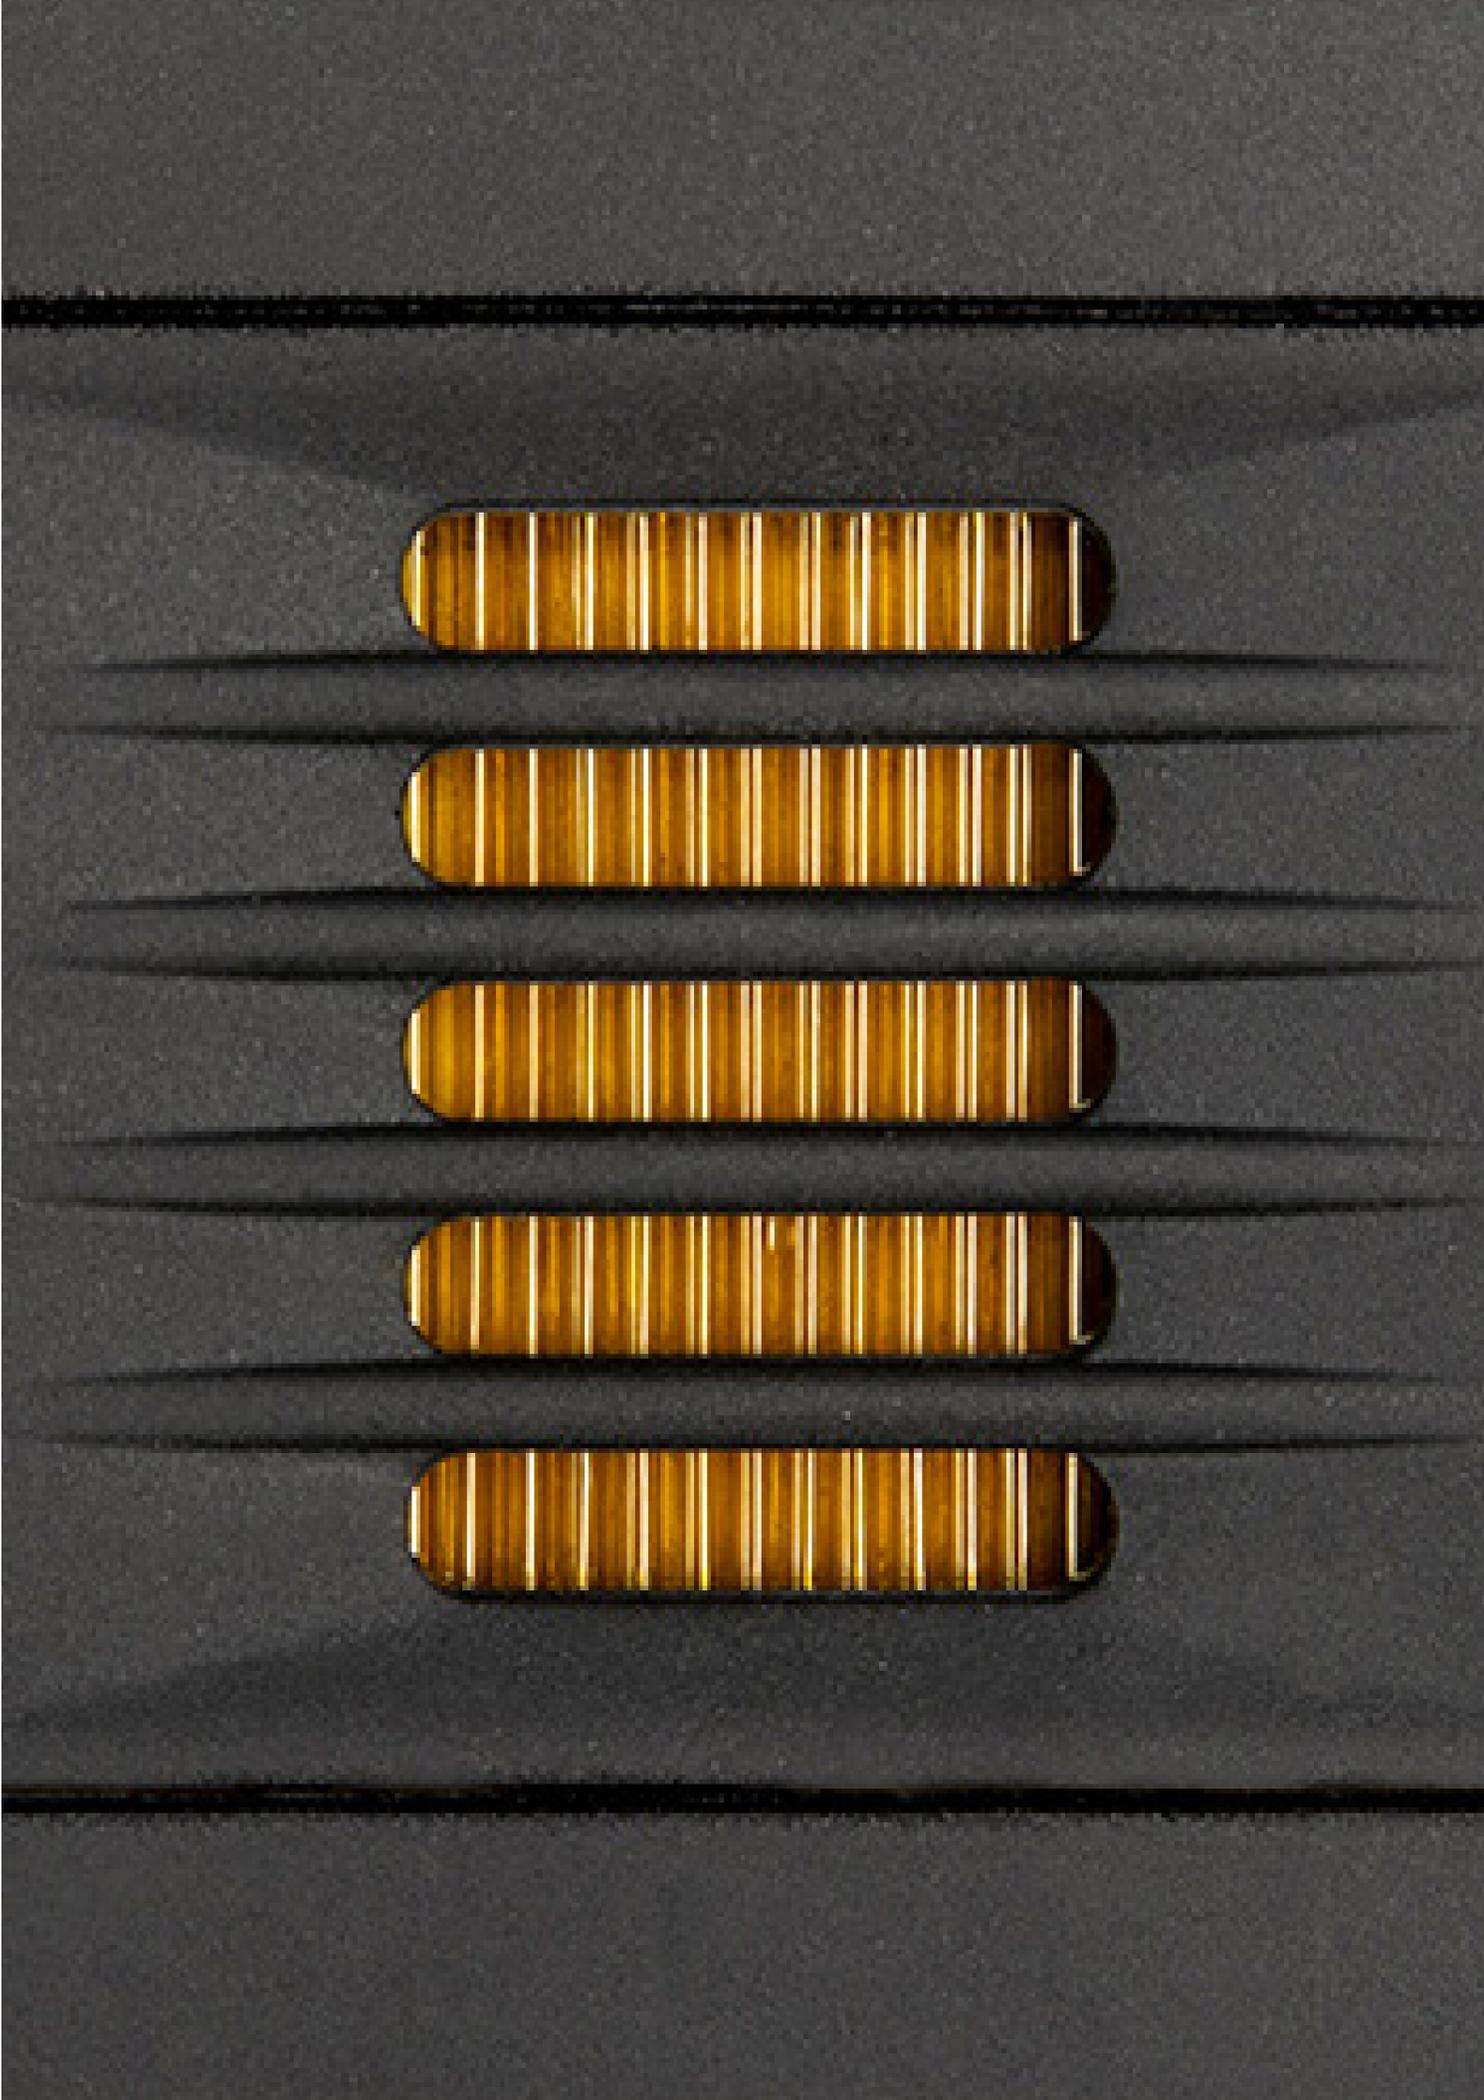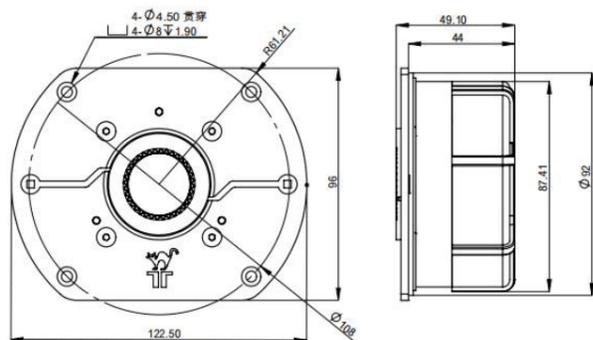

1" | AMT2838

Air Motion Transformer

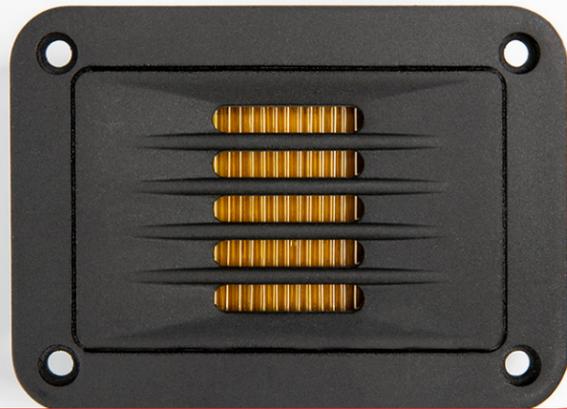

Key features:

- SMOOTH FREQUENCY RESPONSE IN WORKING RANGE, VERY LOW HARMONIC DISTORTION
- COMPACT DESIGN WITH INTEGRATED WAVEGUIDE
- BEST USE IN HIGH PERFORMING HI-FI AUDIO SYSTEMS

Design notes:

Introducing our Air Motion Transformer AMT2838, meticulously engineered to elevate the auditory experience in high-fidelity audio products. Designed to be the pinnacle of sound reproduction, the AMT2838 delivers ultra-clean, detailed, and well-defined mid to high-frequency sound, setting a new standard in audio excellence.

Crafted with precision manufacturing,

stringent quality control processes, and advanced glue dispensing techniques, our AMT2838 is engineered for long-term durability and unwavering performance, ensuring that the product in your hands is synonymous with reliability and stability.


The AMT2838's magnetic system provides a robust B field to the formed diaphragm, enhancing its overall per-

formance and contributing to its exceptional sound output. The diaphragm assembly is a marvel in engineering, featuring polyimide foils encapsulating aluminum conductive film. Our innovative high-precision forming technique ensures that each diaphragm is crafted with a high degree of repeatability, enhancing unit-to-unit consistency and delivering stability, resulting in unparalleled audio performance.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 2200 Hz	Dome Material: n/a	AMT2838X-541A
Rated Impedance: 4 ohm	Nominal sensitivity 96 dB	Surround material: Kapton	
Power handling	Re: 4.0 ohm	Magnet material: Neodymium	
AES Power: 10 watts	Le: n/a mH	Overall diameter: 93*68 mm	
Program Power: 20 watts		Bolt circle diameter: 77*52 mm	Recone kits: RCAMT2838X-541A
Peak Power: 40 watts		Throat diameter: n/a mm	
Voice Coil		Number of mounting holes: 4	
Diameter: n/a in.		Depth (front to rear): 27.1 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: Aluminum		Net weight: 0.22kg	
Former: kapton			

Frequency response & Impedance

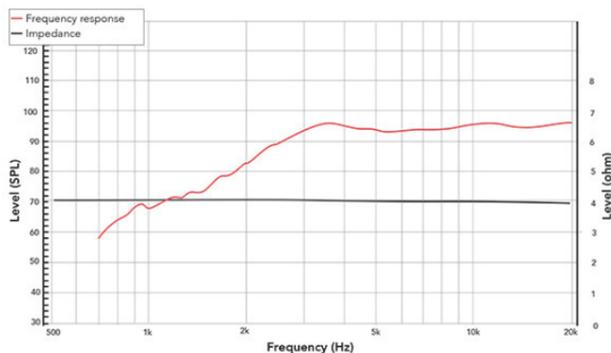

Frequency response measured on IAC baffle

2D drawing

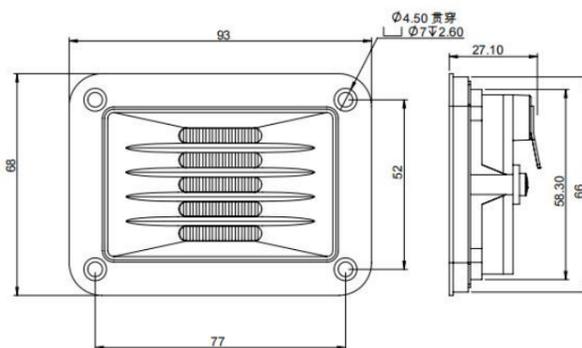

1" | 075NCD

Neodymium Compression Driver



Key features:

- HIGH SENSITIVITY IN VERY SMALL BODY
- LIGHTWEIGHT, SUITABLE FOR PORTABLE PRODUCTS

Design notes:

The 075NCD compression driver is a high performance, high frequency device ideal for professional loudspeaker systems, high output hi-fi systems and after market car audio applications. The driver's neodymium based magnetic circuit provides a robust, high force BL field, providing precision control of the Polyimide diaphragm assembly. The unit delivers the frequency response and high power handling through 0.75


inch exit throat. Diaphragm Assembly The driver features a 19mm Polyimide diaphragm formed as single piece with Polyimide suspension. The dome is carefully attached to a high temperature Kapton voice coil former that withstands the long term power characteristics typically seen in professional applications. The acoustic output exits through a bullet phase

plug and a 0.75 inch throat aperture. Nominal sensitivity is 109 dB 1watt / 1 meter.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 2300 Hz	Dome Material: Polymer	075NCDX-015
Rated Impedance: 8 ohm	Nominal sensitivity 100 dB	Surround material: Polymer	
Power handling	Re: 7.0 ohm	Magnet material: Neodymium	
AES Power: 20 watts	Le: n/a mH	Overall diameter: 59.5 mm	
Program Power: 40 watts		Bolt circle diameter: 53 mm	Recone kits: RC075NCDX-015
Peak Power: 80 watts		Throat diameter: 19 mm mm	
Voice Coil		Number of mounting holes: 4	
Diameter: 0.75 in.		Depth (front to rear): 35 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAW		Net weight: 0.17 kg	
Former: kapton			

Frequency response & Impedance

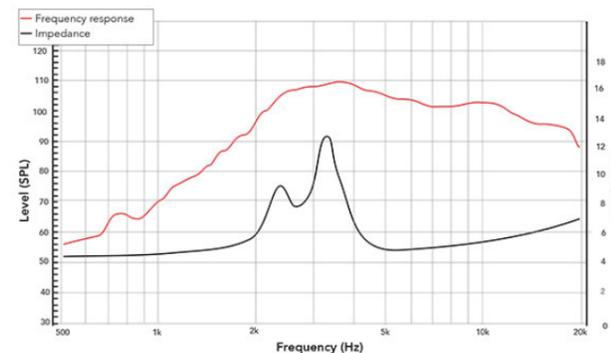

Frequency response measured on IAC baffle

2D drawing

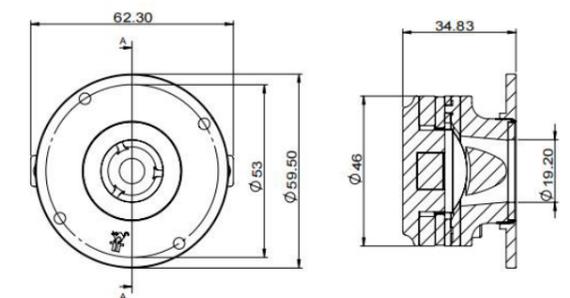

1" | 075NCD

Neodymium Compression Driver



Key features:

- BUDGET SENSITIVE APPLICATIONS
- EASY HORN MOUNTING
- 19MM POLYIMIDE DIAPHRAGM

Design notes:

Introducing the cutting-edge 075NCD compression driver, an exceptional high-performance, high-frequency marvel tailored for professional loudspeaker systems, high-output hi-fi setups, and aftermarket car audio installations. Boasting a neodymium-based magnetic circuit, this driver generates a resilient, high-force BL field, guaranteeing precise control over the Polyimide diaphragm assembly. Delivering unri-

valued frequency response and robust power handling capabilities, all through a sleek 0.75-inch exit throat.


Diaphragm Design: Featuring a 19mm Polyimide diaphragm meticulously crafted as a single piece, alongside a Polyimide suspension that ensures superior durability. The unparalleled acoustic output is channeled through a bullet phase

plug coupled with a 0.75-inch throat aperture.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 2500 Hz	Dome Material: Polymer	075NCDX-567A
Rated Impedance: 4 ohm	Nominal sensitivity 100 dB	Surround material: Polymer	
Power handling	Re: 4.0 ohm	Magnet material: Neodymium	
AES Power: 20 watts	Le: n/a mH	Overall diameter: 59.5 mm	
Program Power: 40 watts		Bolt circle diameter: 53 mm	Recone kits: RC075NCDX-567A
Peak Power: 80 watts		Throat diameter: 19 mm mm	
Voice Coil		Number of mounting holes: 2	
Diameter: 0.75 in.		Depth (front to rear): 33.38 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAW		Net weight: 0.17 kg	
Former: kapton			

Frequency response & Impedance

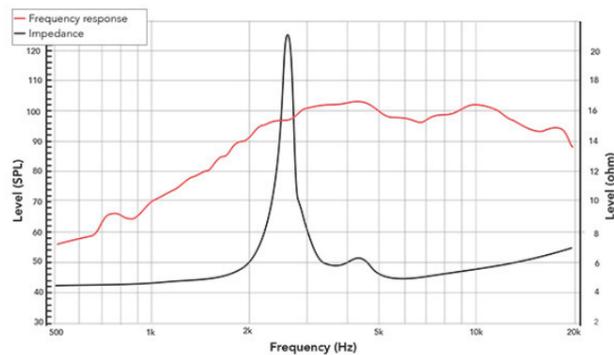

Frequency response measured on IAC baffle

2D drawing

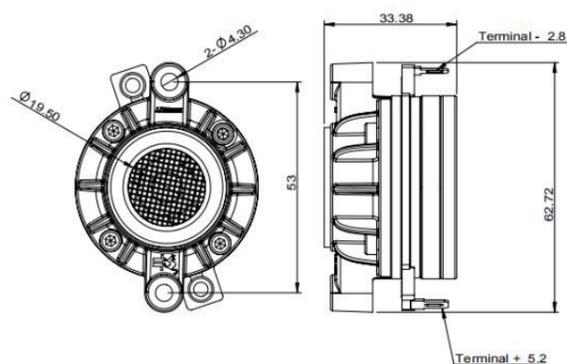

1" | 101FCD

Ferrite Compression Driver



Key features:

- HIGH SPL
- HIGH POWER HANDLING
- COMPACT SIZE

Design notes:

The 101FCD compression driver is a very high performance, high frequency device ideal for compact professional loudspeaker systems. The driver ferrite based magnetic circuit provides precision control over Polyamide diaphragm assembly. The unit delivers extended frequency response and high power handling throughout 1.0 inch exit throat. The diaphragm is carefully attached to a high temperature Nomex


voice coil former that can withstand the long term power handling characteristic typically seen in professional audio applications. REDCATT uses state of the art adhesives in all assembly steps. Our voice coil to dome bonding is unique process, developed to greatly improve the power handling capabilities. REDCATT unique and precise adhesives dispensing, combined with our in-house developed dome treat-

ments are further improving the long term reliability of this product.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 2000 Hz	Dome Material: Polymer	101FCDX-539A
Rated Impedance: 8 ohm	Nominal sensitivity 109 dB	Surround material: Polymer	
Power handling	Re: 5.6 ohm	Magnet material: Ferrite	
AES Power: 20 watts	Le: n/a mH	Overall diameter: 102.5 mm	
Program Power: 40 watts		Bolt circle diameter: 76 mm	Recone kits: RC101FCDX-539A
Peak Power: 80 watts		Throat diameter: 25mm mm	
Voice Coil		Number of mounting holes: 2	
Diameter: 1 in.		Depth (front to rear): 57.7 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAR		Net weight: 907g	
Former: kapton			

Frequency response & Impedance

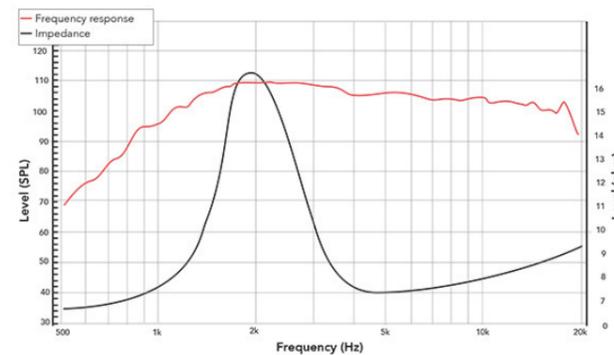

Frequency response measured on IAC baffle

2D drawing

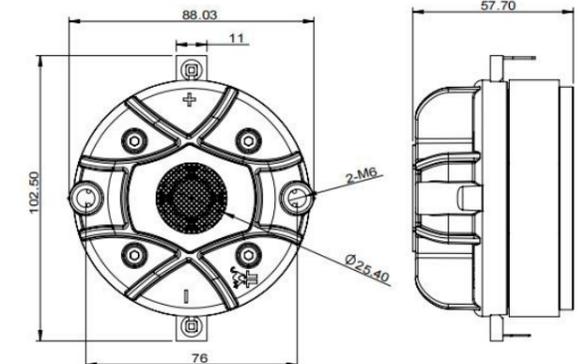

1" | 101NCD

Neodymium Compression Driver



Key features:

- IDEAL FOR COMPACT LINE-ARRAYS
- HIGH POWER HANDLING
- LOW DISTORTION, HIGH SPL

Design notes:

The 101NCD compact size compression driver is a very high performance, high frequency device ideal for compact professional loudspeaker systems. The driver neodymium based magnetic circuit provides precision control over Polyamide diaphragm assembly in very compact package. The unit delivers extended frequency response and high power handling throughout 1.0 inch exit throat. The diaphragm is carefully


attached to a high temperature Nomex voice coil former that can withstand the long term power handling characteristic typically seen in professional audio applications. REDCATT uses state of the art adhesives in all assembly steps. Our voice coil to dome bonding is unique process, developed to greatly improve the power handling capabilities. REDCATT unique and precise adhesives dispensing, combined with

our in-house developed dome treatments are further improving the long term reliability of this product.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 1900 Hz	Dome Material: Polymer	101NCDX-160
Rated Impedance: 8 ohm	Nominal sensitivity 109 dB	Surround material: Polymer	
Power handling	Re: 4.6 ohm	Magnet material: Neodymium	
AES Power: 20 watts	Le: n/a mH	Overall diameter: 86 mm	
Program Power: 40 watts		Bolt circle diameter: 53 mm	Recone kits:
Peak Power: 80 watts		Throat diameter: 25mm mm	RC101NCDX-160
Voice Coil		Number of mounting holes: 2	
Diameter: 1 in.		Depth (front to rear): 37 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAW		Net weight: 615g	
Former: kapton			

Frequency response & Impedance

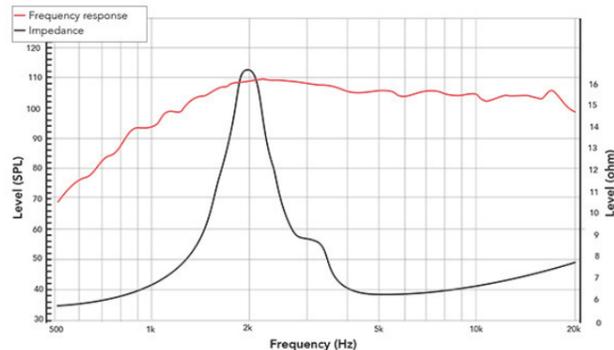

Frequency response measured on IAC baffle

2D drawing

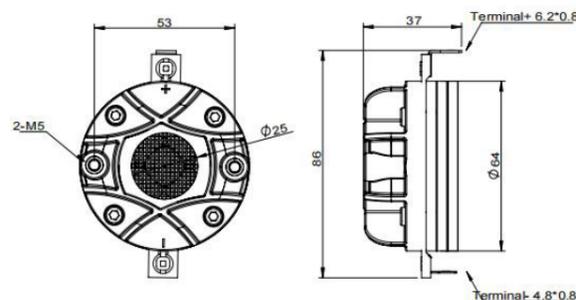

1" | 142FCD

Ferrite Compression Driver



Key features:

- VERY HIGH SPL, LOW FS
- HIGH POWER HANDLING
- SMOOTH FREQUENCY RESPONSE IN WORKING RANGE

Design notes:

Introducing our latest innovation, the 142FCD compression driver! Developed using advanced FEM techniques, this driver outperforms many of our competitor products. With a resonant frequency of 1kHz, it allows for a lower frequency crossover point, while delivering very high SPL and a natural rolloff in high frequencies, making it a breeze to implement in your high-quality

sound systems.

But that's not all, our state-of-the-art robotic dome forming is at play here too. The result? Highly precise and consistent polymer domes that further elevate the exceptional performance of this driver.


Moreover, the robust ferrite magnetic circuit delivers a high B field to

the edge-wound voice coil, which is carefully attached to the dome by the best available adhesives. This not only ensures precise and consistent performance but also enhances the high power handling capabilities of the 142FCD compression driver. Experience the next level of audio quality with the 142FCD compression driver - where innovation meets superior craftsmanship.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 1000 Hz	Dome Material: Polymer	142FCDX-557A
Rated Impedance: 8 ohm	Nominal sensitivity 105 dB	Surround material: Polymer	
Power handling	Re: 6.0 ohm	Magnet material: Ferrite	
AES Power: 35 watts	Le: n/a mH	Overall diameter: 95 mm	
Program Power: 70 watts		Bolt circle diameter: 76 mm	Recone kits:
Peak Power: 140 watts		Throat diameter: 25.4mm mm	RC142FCDX-557A
Voice Coil		Number of mounting holes: 4	
Diameter: 1.4 in.		Depth (front to rear): 54.2 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAR		Net weight: 1.25kg	
Former: kapton			

Frequency response & Impedance

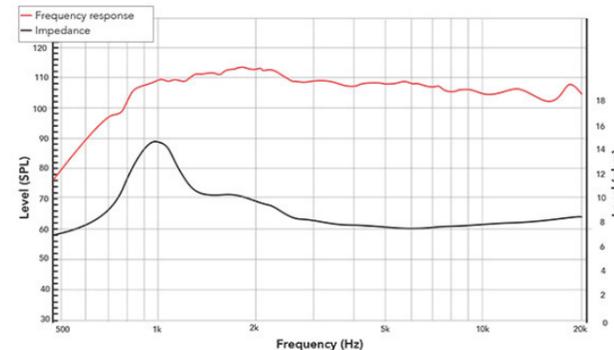

Frequency response measured on IAC baffle

2D drawing

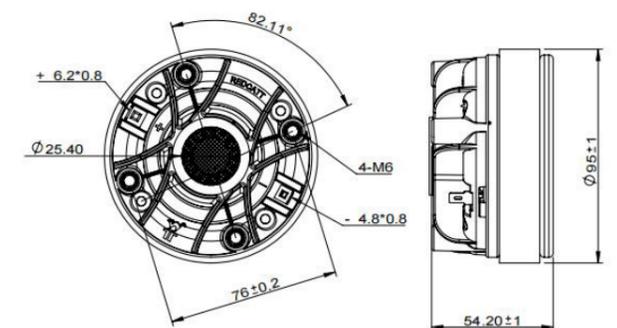



Key features:

- LOW RESONANT FREQUENCY
- MOUNTING PLASTIC ADAPTER WITH THREAD
- FOR APPLICATIONS WITH LIMITED SPACE

Design notes:

The 141FCD compression driver is a high performance high frequency device ideal for professional loudspeaker systems. Its core is designed based on our very 140FCD model. In fact the dome assembly is shared between these two models. The driver's ferrite based magnetic circuit was modified to fit applications with a limited space and lower budget. Furthermore, we have added mounting


adapter with 1 3/8" 18TPI thread to easy and fast mounting onto the horn throats that incorporate this thread. Diaphragm Assembly The driver features a 36mm Polyimide diaphragm formed as single piece with Polyimide suspension. The suspension has designed and FEM optimized venting features to lower the harmonic distortion. The dome is carefully attached to a

high temperature Nomex voice coil former that withstands the long term power characteristics typically seen in professional applications. The acoustic output exits through a radial phase plug and a 1.0 inch throat aperture. Nominal sensitivity is 105 dB 1watt / 1 meter.

Specifications:



General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 900 Hz	Dome Material: Polymer	141FCDX-337
Rated Impedance: 4 ohm	Nominal sensitivity 105 dB	Surround material: Polymer	
Power handling	Re: 2.5 ohm	Magnet material: Ferrite	
AES Power: 30 watts	Le: n/a mH	Overall diameter: 72 mm	
Program Power: 60 watts		Bolt circle diameter: Thread	Recone kits: RC141FCDX-337
Peak Power: 120 watts		Throat diameter: 25mm mm	
Voice Coil		Number of mounting holes: n/a	
Diameter: 1.4 in.		Depth (front to rear): 65.7 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAR		Net weight: 634g	
Former: kapton			

Frequency response & Impedance

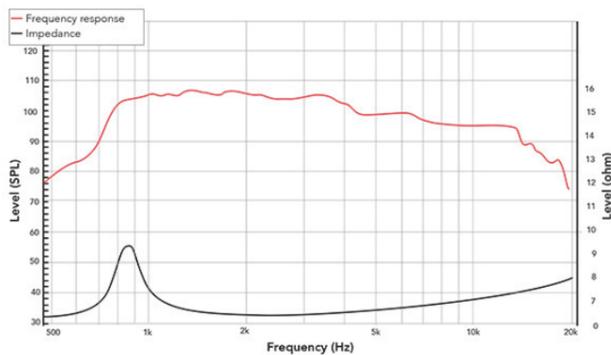

Frequency response measured on IAC baffle

2D drawing

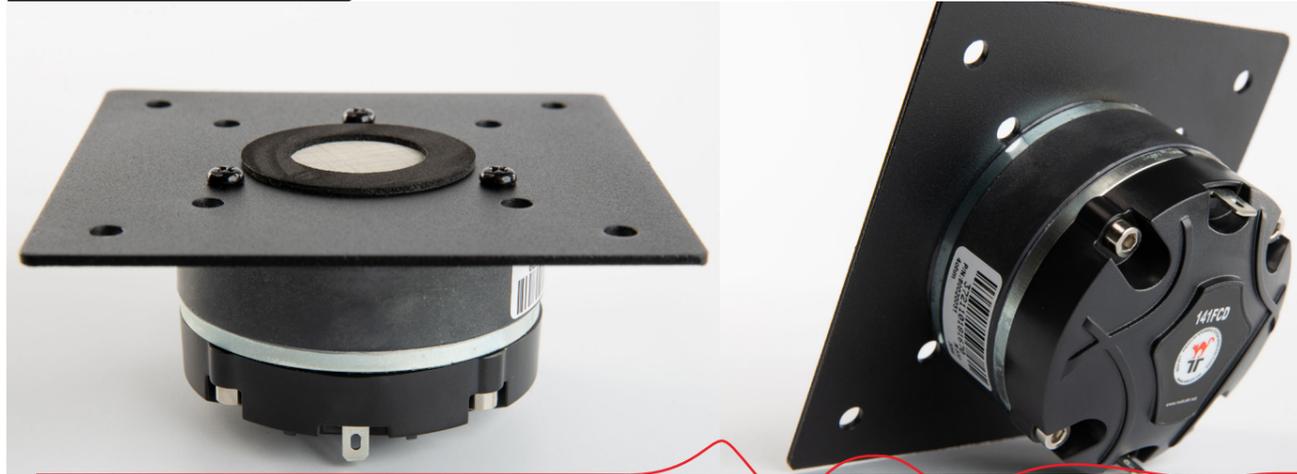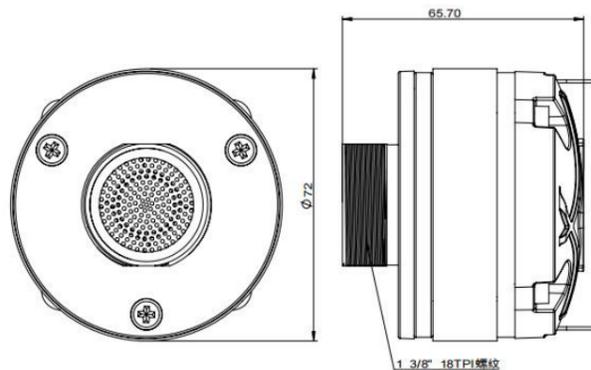

Key features:

- COMPACT DESIGN
- DELIVERED WITH MOUNTING STEEL PLATE
- LOW RESONANT FREQUENCY

Design notes:

The 141FCD compression driver is a high performance high frequency device ideal for professional loudspeaker systems. Its core is designed based on our very 140FCD model. In fact the dome assembly is shared between these two models. The driver's ferrite based magnetic circuit was modified to fit applications with a limited space and lower budget. Furthermore, we have added steel


face-plate for easier assembly on production lines for high-volume productions. Diaphragm Assembly The driver features a 36mm Polyimide diaphragm formed as single piece with Polyimide suspension. The suspension has designed and FEM optimized venting features to lower the harmonic distortion. The dome is carefully attached to a

high temperature Nomex voice coil former that withstands the long term power characteristics typically seen in professional applications. The acoustic output exits through a radial phase plug and a 1.0 inch throat aperture. Nominal sensitivity is 105 dB 1watt / 1 meter.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 950 Hz	Dome Material: Polymer	141FCDX-372
Rated Impedance: 4 ohm	Nominal sensitivity 105 dB	Surround material: Polymer	
Power handling	Re: 2.5 ohm	Magnet material: Ferrite	
AES Power: 30 watts	Le: n/a mH	Overall diameter: 110 mm	
Program Power: 60 watts		Bolt circle diameter: 84.85 mm	Recone kits: RC141FCDX-372
Peak Power: 120 watts		Throat diameter: 25.6mm mm	
Voice Coil		Number of mounting holes: 4	
Diameter: 1.4 in.		Depth (front to rear): 50.45 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAR		Net weight: 808g	
Former: kapton			

Frequency response & Impedance

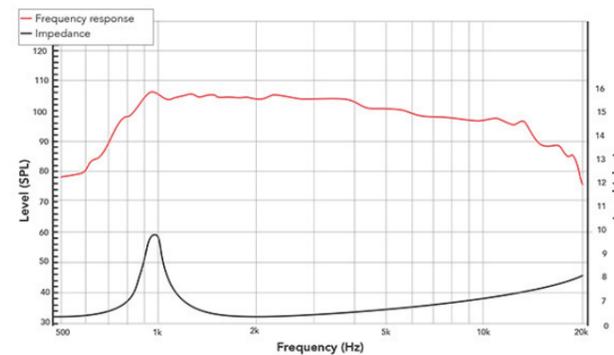

Frequency response measured on IAC baffle

2D drawing

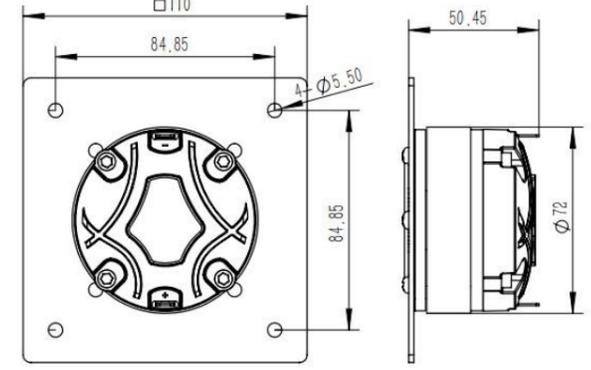

1" | 140NCD

Neodymium Compression Driver



Key features:

- VERY HIGH PERFORMANCE AT SMALL SIZE
- 2-WAY AND MULTI-WAY SPEAKER SYSTEMS
- STABILITY

Design notes:


The 140NCD is a high performance high frequency device ideal for professional loudspeaker systems. The unit delivers extended frequency response and high power handling through 1.3inch exit throat. The suspension has designed and FEM optimized venting features to lower the harmonic distortion. The venting holes also improves the control over the dome movements at low frequencies.

140NCD ultra compact design ensures the driver can be used in enclosure designs where the space is very limited, such as line array systems. Redcatt has focused on designing an optimized neodymium based magnetic circuit capable of delivering the highest level of performance and value. The neodymium circuit is optimized to generate the minimum amount of flux modulation providing exceptional stability.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 1200 Hz	Dome Material: Polymer	140NCDX-077
Rated Impedance: 8 ohm	Nominal sensitivity 109 dB	Surround material: Polymer	
Power handling	Re: 5.5 ohm	Magnet material: Neodymium	
AES Power: 30 watts	Le: n/a mH	Overall diameter: 95 mm	
Program Power: 60 watts		Bolt circle diameter: 76 mm	Recone kits:
Peak Power: 120 watts		Throat diameter: 25mm mm	RC140NCDX-077
Voice Coil		Number of mounting holes: 4	
Diameter: 1.4 in.		Depth (front to rear): 47.85 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAR		Net weight: 538g	
Former: kapton			

Frequency response & Impedance

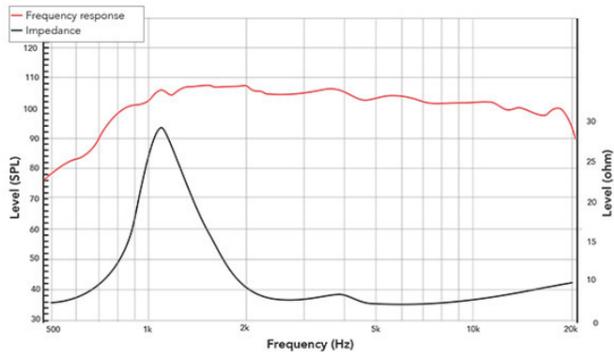

Frequency response measured on IAC baffle

2D drawing

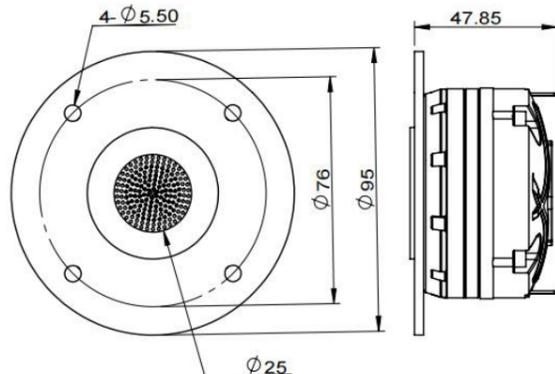

1" | 140FCD

Ferrite Compression Driver



Key features:

- HIGH PERFORMANCE, HIGH QUALITY COMPRESSION DRIVER
- FITS ANY BUDGET
- DESIGNED FOR USAGE IN 2-WAY & MULTI-WAY SYSTEMS

Design notes:

The 140FCD is a very high performance device ideal for professional loudspeaker systems. The unit delivers extended frequency response and high power handling through 1.0inch exit throat. REDCATT has developed unique motor system magnetic gap volume tuning. This feature dramatically improves THD and improves the transient response of the driver. The driver features a 36mm Polyimide

diaphragm formed as single piece with Polyimide suspension. The suspension has designed and FEM optimized venting features to lower the harmonic distortion.

The dome is carefully attached to a high temperature Nomex voice coil former that withstands the long term power characteristics typically seen in professional applications. The acoustic output exits through a radial


phase plug and a 1.0 inch throat aperture. Nominal sensitivity is 110.5 dB 1watt / 1 meter.

Our voice coil to dome bonding is unique process, developed to greatly improve the power handling capabilities. REDCATT precise adhesives dispensing, combined with our in-house developed dome treatments are further improving the long term reliability of this product.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 1"	Resonant frequency: 1200 Hz	Dome Material: Polymer	140FCDX-087
Rated Impedance: 8 ohm	Nominal sensitivity 106 dB	Surround material: Polymer	
Power handling	Re: 5.5 ohm	Magnet material: Ferrite	
AES Power: 30 watts	Le: n/a mH	Overall diameter: 100 mm	
Program Power: 60 watts		Bolt circle diameter: 76 mm	Recone kits:
Peak Power: 120 watts		Throat diameter: 26mm mm	RC140FCDX-087
Voice Coil		Number of mounting holes: 4	
Diameter: 1.4 in.		Depth (front to rear): 48 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAR		Net weight: 1.1kg	
Former: kapton			

Frequency response & Impedance

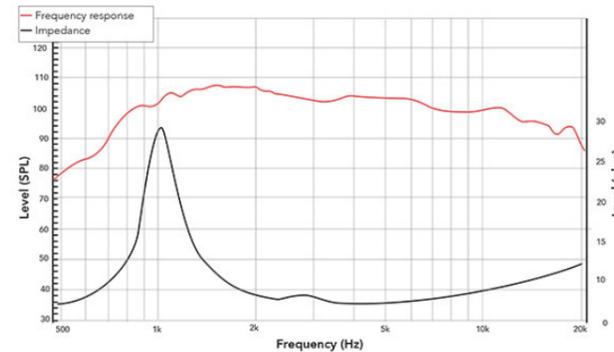

Frequency response measured on IAC baffle

2D drawing

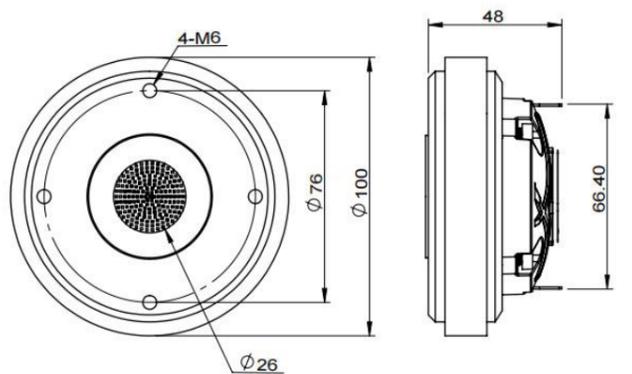

2" | 181FCD

Ferrite Compression Driver



Key features:

- EXTENDED FREQUENCY RESPONSE
- FEM OPTIMIZED MAGNETIC STRUCTURE
- USE IN LARGER SPEAKER SYSTEMS


Design notes:

The 181FCD compression driver is a very high performance high frequency device ideal for professional loudspeaker systems. The driver's dome is carefully attached to based magnetic circuit provides a robust, high force BL field, providing precision control of the Polyimide diaphragm assembly. We have optimized the overall performance of this compression driver to deliver pleasant sound.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 2"	Resonant frequency: 1500 Hz	Dome Material: Polymer	181FCDX-227D
Rated Impedance: 8 ohm	Nominal sensitivity 109 dB	Surround material: Polymer	
Power handling	Re: 5.2 ohm	Magnet material: Ferrite	
AES Power: 70 watts	Le: n/a mH	Overall diameter: 110 mm	
Program Power: 140 watts		Bolt circle diameter: 57 mm	Recone kits:
Peak Power: 280 watts		Throat diameter: 26mm mm	RC181FCDX-227D
Voice Coil		Number of mounting holes: 4	
Diameter: 1.8 in.		Depth (front to rear): 62.83 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: Aluminum Sq.		Net weight: 1.75kg	
Former: NSV			

Frequency response & Impedance

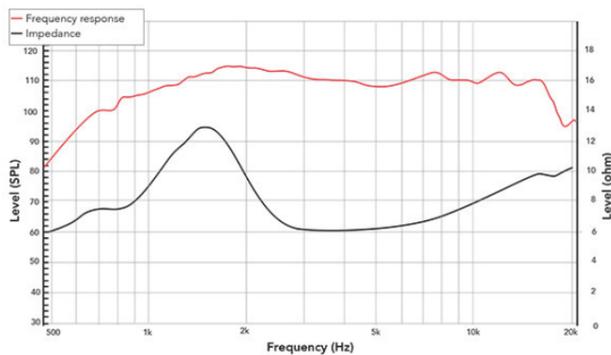

Frequency response measured on IAC baffle

2D drawing

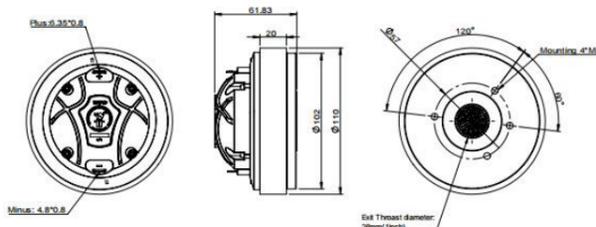

2" | 180NCD

Neodymium Compression Driver



Key features:

- VERY COMPACT DESIGN
- POWERFUL NEODYMIUM MAGNETIC CIRCUIT
- BEST USE IN HIGH PERFORMING SPEAKER SYSTEMS AND ARRAYS

Design notes:

The 180NCD is a high performance high frequency device ideal for professional loudspeaker systems. In an ultra compact size, the driver's neodymium based magnetic circuit provides a robust, high force BL field providing precision control of the Polyimide diaphragm assembly. The unit delivers extended frequency response and high power handling through 1.0 inch exit throat. The suspension has

designed and FEM optimized venting features to lower the harmonic distortion. The venting holes also improves the control over the dome movements at low frequencies. REDCATT has developed unique phase plug. Phase plug is FEM optimized to lower the distortion artifacts at mid frequencies.


180NCD ultra compact design ensures the driver can be used in enclosure designs where the space is very

limited, such as line array systems. Redcatt has focused on designing an optimized neodymium based magnetic circuit capable of delivering the highest level of performance and value. This effort has resulted in a device that offers uncompromising performance featuring high efficiency, exceptional transient response and controlled distortion characteristics, all that in extremely compact size.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 2"	Resonant frequency: 1100 Hz	Dome Material: Polymer	180NCDX-086B
Rated Impedance: 16 ohm	Nominal sensitivity 110 dB	Surround material: Polymer	
Power handling	Re: 12.0 ohm	Magnet material: Neodymium	
AES Power: 40 watts	Le: n/a mH	Overall diameter: 75 mm	
Program Power: 80 watts		Bolt circle diameter: 57 mm	Recone kits:
Peak Power: 160 watts		Throat diameter: 26mm mm	RC180NCDX-086B
Voice Coil		Number of mounting holes: 4	
Diameter: 1.8 in.		Depth (front to rear): 46.5 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAR		Net weight: 550g	
Former: Nomex			

Frequency response & Impedance

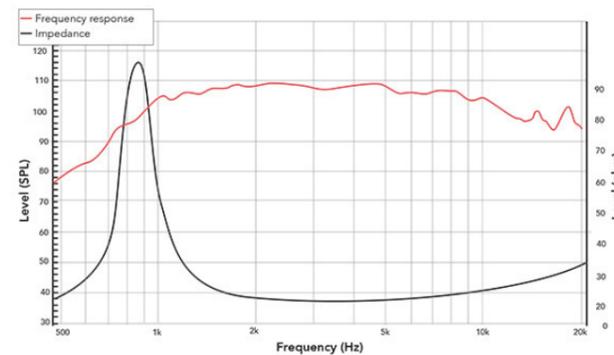

Frequency response measured on IAC baffle

2D drawing

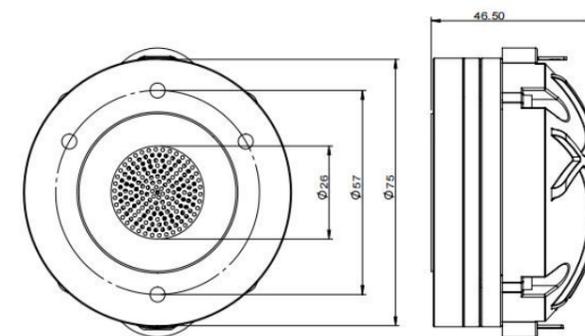

2" | 180FCD

Ferrite Compression Driver



Key features:

- EXTENDED FREQUENCY RESPONSE
- FEM OPTIMIZED MAGNETIC STRUCTURE
- USE IN LARGER SPEAKER SYSTEMS

Design notes:

The 180FCD compression driver is a very high performance high frequency device ideal for professional loudspeaker systems. The driver, dome is carefully attached to based magnetic circuit provides a robust, high force BL field, providing precise control of the Polyimide diaphragm assembly.

Diaphragm Assembly

The driver features a 44mm Polyimide diaphragm formed as single piece with Polyimide suspension.


The dome is assembled to a high temperature Nomex voice coil former that withstands the long term power characteristics typically seen in professional applications. The acoustic output exits through a bullet phase plug and a 1.0 inch throat aperture. Nominal sensitivity is 108.5 dB 1watt / 1 meter.

REDCATT uses state of the art adhesives in all assembly steps. Our voice coil to dome bonding is unique process, developed to greatly improve the power handling capabilities. REDCATT unique and precise adhesives dispensing, combined with our in-house developed dome treatments are further improving the long term reliability of

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 2"	Resonant frequency: 2000 Hz	Dome Material: Polymer	180FCDX-044
Rated Impedance: 8 ohm	Nominal sensitivity 109 dB	Surround material: Polymer	
Power handling	Re: 5.8 ohm	Magnet material: Ferrite	
AES Power: 40 watts	Le: n/a mH	Overall diameter: 120 mm	
Program Power: 80 watts		Bolt circle diameter: 76&57 mm	Recone kits:
Peak Power: 160 watts		Throat diameter: 28.5mm mm	RC180FCDX-044
Voice Coil		Number of mounting holes: 2+3	
Diameter: 1.8 in.		Depth (front to rear): 69 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAR		Net weight: 2.2kg	
Former: kapton			

Frequency response & Impedance

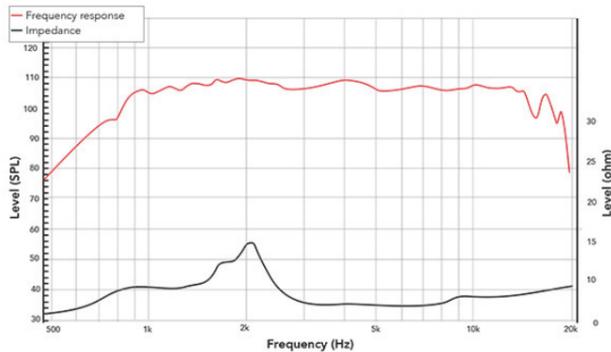

Frequency response measured on IAC baffle

2D drawing

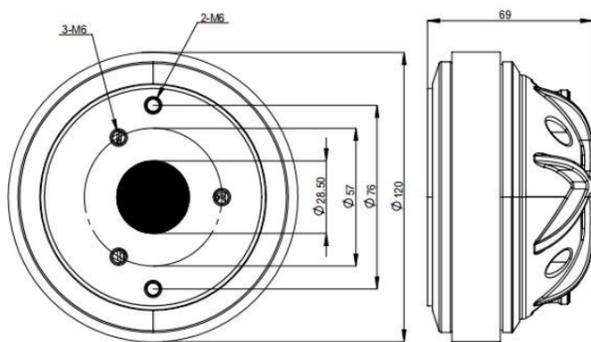

2" | 180FCD

Ferrite Compression Driver



Key features:

- DRIVER DELIVERING HIGH SPL AT AFFORDABLE COST
- ROBUST, HIGH BL MAGNETIC CIRCUIT

Design notes:

The 180FCD compression driver is a very high-performance, high-frequency device ideal for professional loudspeaker systems, such as larger 2-way systems.

Diaphragm Assembly
The driver sports a 44mm polyimide diaphragm formed as a single piece with the suspension. The voice coil is attached to the dome with our state of

the art adhesives and precise bonding equipment.

The acoustic output exits through a circumferential phase plug and a 1.0-inch throat aperture. Nominal sensitivity is 109.5 dB 1watt / 1 meter.


REDCATT uses state of the art adhesives in all assembly steps. Our voice coil to dome bonding is a unique process, developed to greatly improve the

power handling capabilities. REDCATT unique and precise adhesives dispensing, combined with our in-house developed dome treatments are further improving the long term reliability of this product.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 2"	Resonant frequency: 1100 Hz	Dome Material: Polymer	180FCDX-330
Rated Impedance: 8 ohm	Nominal sensitivity 110 dB	Surround material: Polymer	
Power handling	Re: 5.8 ohm	Magnet material: Ferrite	
AES Power: 55 watts	Le: n/a mH	Overall diameter: 120 mm	
Program Power: 110 watts		Bolt circle diameter: 76&57 mm	Recone kits:
Peak Power: 220 watts		Throat diameter: 28.5mm mm	RC180FCDX-330
Voice Coil		Number of mounting holes: 2+3	
Diameter: 1.8 in.		Depth (front to rear): 69 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAR		Net weight: 2.2kg	
Former: kapton			

Frequency response & Impedance

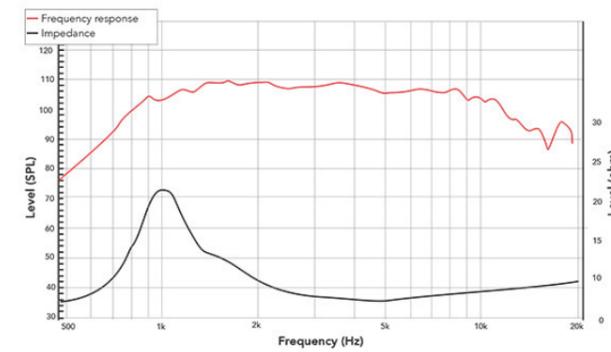

Frequency response measured on IAC baffle

2D drawing

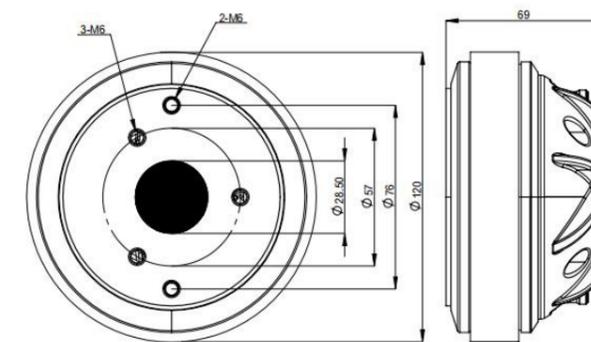



Key features:

- VERY COMPACT DESIGN
- PURE TITANIUM DOME WITH SURROUND INTEGRATED RESONANCE CONTROL FEATURES
- PORTABLE PRODUCTS, 2-WAY AND MULTI-WAY SYSTEMS, LINE-ARRAY APPLICATIONS

Design notes:

Introducing the 202NTi: Elevating sound performance to new heights! With cutting-edge technology and precision engineering, this compression driver takes your audio experience to the next level. Designed with a newly updated magnetic circuit, phase plug, voice coil, and dome, it outshines its predecessor, the 201NTi. No compromises on sound quality - only pure, powerful sound in a compact package.


The Neodymium magnetic circuit offers unrivaled control, paired with a 1.4-inch exit throat and titanium diaphragm for crystal-clear sound. Featuring a groundbreaking dome assembly design, the 202NTi boasts seamless integration of components for superior frequency response and power handling. Each step of the assembly process is meticulously executed with state-of-the-art adhesives, ensuring

unmatched reliability and performance. Redefine your audio experience with the 202NTi - where innovation meets excellence.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 3"	Resonant frequency: 700 Hz	Dome Material: Titanium	202NTiX-555A
Rated Impedance: 8 ohm	Nominal sensitivity 109 dB	Surround material: Titanium	
Power handling	Re: 5.9 ohm	Magnet material: Neodymium	
AES Power: 100 watts	Le: n/a mH	Overall diameter: 112 mm	
Program Power: 200 watts		Bolt circle diameter: 102 mm	Recone kits:
Peak Power: 400 watts		Throat diameter: 36mm mm	RC202NTiX-555A
Voice Coil		Number of mounting holes: 4	
Diameter: 3 in.		Depth (front to rear): 58 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAR		Net weight: 1.9kg	
Former: kapton			

Frequency response & Impedance

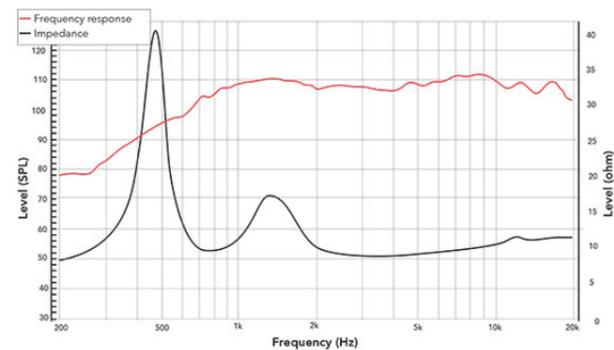

Frequency response measured on IAC baffle

2D drawing

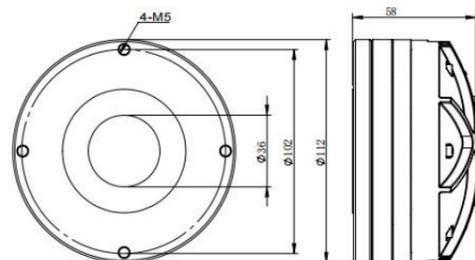

Key features:

- DESIGNED FOR APPLICATIONS WITH LOW BUDGET
- POLYIMIDE SURROUND WITH PURE TITANIUM DOME

Design notes:

The 202FCD compression driver is a high-performance, high-frequency device ideal for professional loudspeaker systems. The driver, as ferrite based magnetic circuit provides a robust, high force BL field providing precision control of the pure titanium diaphragm assembly. Featuring 1.4inch exit throat. The suspension is made of polyimide material, providing optimum control over the diaphragm movement. The


design has been optimized to have a great level of performance at very affordable price levels. The drivers are suitable for 2-way and multi-way speaker systems. Dome Assembly Design REDCATT has designed the pure titanium dome to be bonded to the polyimide surround. This solution greatly improves the control of the dome piston motion, having a positive effect on the

transient response. →↑

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 3"	Resonant frequency: 500 Hz	Dome Material: Titanium	202FCDX-273
Rated Impedance: 8 ohm	Nominal sensitivity 108 dB	Surround material: Polymer	
Power handling	Re: 6.2 ohm	Magnet material: Ferrite	
AES Power: 100 watts	Le: n/a mH	Overall diameter: 170 mm	
Program Power: 200 watts		Bolt circle diameter: 102 mm	Recone kits:
Peak Power: 400 watts		Throat diameter: 36mm mm	RC202FCDX-273
Voice Coil		Number of mounting holes: 4	
Diameter: 3 in.		Depth (front to rear): 70.8 mm	In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.
Winding wire: CCAR		Net weight: 5kg	
Former: kapton			

Frequency response & Impedance

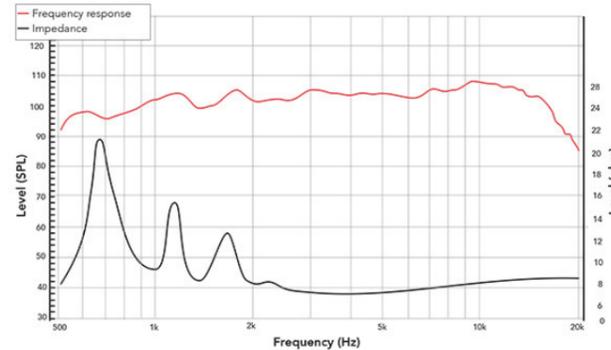

Frequency response measured on IAC baffle

2D drawing

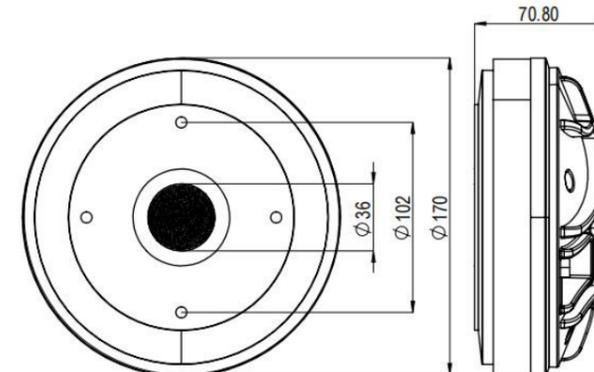

3" | 201NTi

Neodymium Compression Driver



Key features:

- VERY COMPACT DESIGN
- PURE TITANIUM DOME WITH SURROUND INTEGRATED RESONANCE CONTROL FEATURES
- PORTABLE PRODUCTS, 2-WAY AND MULTI-WAY SYSTEMS, LINE-ARRAY APPLICATIONS

Design notes:

The 201NTi compression driver is based on the design of our successful 200NTi. We have shared the same dome assembly between these two models, while we have packed the driver into a smaller form factor. Not any compromises have been made to the sound character. This driver is here to support your needs in the applications where the space is limited. The driver, is Neodymium based magnet-

ic circuit provides a robust, high force BL field, delivering precision control of the pure titanium diaphragm assembly, featuring 1.4inch exit throat.


Dome Assembly Design REDCATT has designed the dome and the surround of this compression driver as a single part. The voice coil former is attached to the dome as a sandwich. This solution greatly improves the transfer of all frequencies onto the

dome, with a good transient response. It also dramatically improves the power handling capability of the driver.

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 3"	Resonant frequency: 700 Hz	Dome Material: Titanium	201NTIX-316
Rated Impedance: 8 ohm	Nominal sensitivity 109 dB	Surround material: Titanium	
Power handling	Re: 5.9 ohm	Magnet material: Neodymium	
AES Power: 100 watts	Le: n/a mH	Overall diameter: 112 mm	
Program Power: 200 watts		Bolt circle diameter: 102 mm	Recone kits:
Peak Power: 400 watts		Throat diameter: 36mm mm	RC201NTIX-316
Voice Coil		Number of mounting holes: 4	
Diameter: 3 in.		Depth (front to rear): 62.1 mm	In many cases REDCATT
Winding wire: CCAR		Net weight: 1.95kg	produces 4 ohms, 8 ohms and
Former: kapton			16 ohms versions. Indicate
			what impedance do you need
			in your request.

Frequency response & Impedance

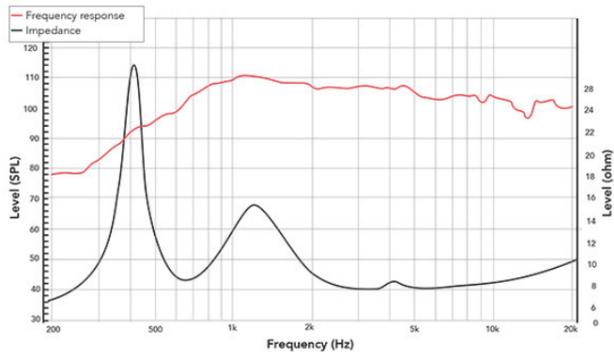

Frequency response measured on IAC baffle

2D drawing

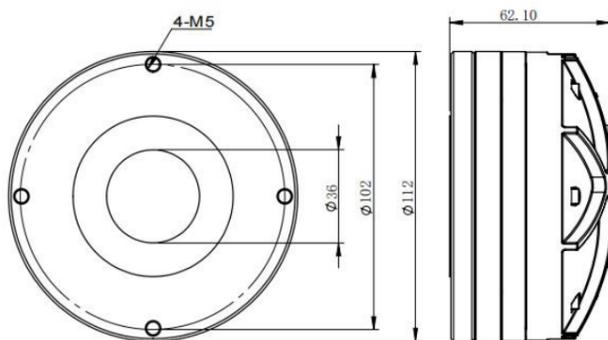

3" | 200NTi

Neodymium Compression Driver



Key features:

- ULTRA HIGH FORCE MAGNETIC SYSTEM WITH BACK PRESSURE REGULATION FEATURES
- VERY HIGH SPL
- CNC MACHINED, PRECISE ALUMINUM PHASE PLUG

Design notes:

The 200NTi compression driver is a high performance high frequency device ideal for professional loudspeaker systems. The driver, is advanced neodymium based magnetic circuit provides a compact, yet robust, ultra high force BL field with precision control of the pure titanium diaphragm assembly. The unit delivers incredibly linear frequency response and very high power handling through 1.4inch exit throat.


The driver features a 75mm pure titanium diaphragm formed as single piece with titanium suspension consisting high efficiency, exceptional transient response and controlled distortion characteristics. The annular phase plug is CNC machined from a single block of aircraft grade aluminum. Our phase plug is true high-tech masterpiece. The reached shape and aligning tolerances are beyond what have been commercially produced

formance. Device that offers uncompromising performance featuring high efficiency, exceptional transient response and controlled distortion characteristics. The annular phase plug is CNC machined from a single block of aircraft grade aluminum. Our phase plug is true high-tech masterpiece. The reached shape and aligning tolerances are beyond what have been commercially produced

Specifications:


General specs	T/S Parameters	Design details	Ordering codes:
Nominal Diameter: 3"	Resonant frequency: 800 Hz	Dome Material: Titanium	200NTIX-043
Rated Impedance: 8 ohm	Nominal sensitivity 111 dB	Surround material: Titanium	
Power handling	Re: 5.9 ohm	Magnet material: Neodymium	
AES Power: 100 watts	Le: n/a mH	Overall diameter: 130 mm	
Program Power: 200 watts		Bolt circle diameter: 102 mm	Recone kits:
Peak Power: 400 watts		Throat diameter: 36mm mm	RC200NTIX-043
Voice Coil		Number of mounting holes: 4	
Diameter: 3 in.		Depth (front to rear): 57 mm	In many cases REDCATT
Winding wire: CCAR		Net weight: 2.9kg	produces 4 ohms, 8 ohms and
Former: kapton			16 ohms versions. Indicate
			what impedance do you need
			in your request.

Frequency response & Impedance

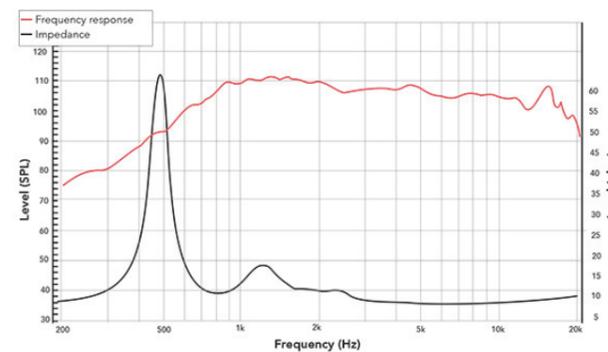

Frequency response measured on IAC baffle

2D drawing

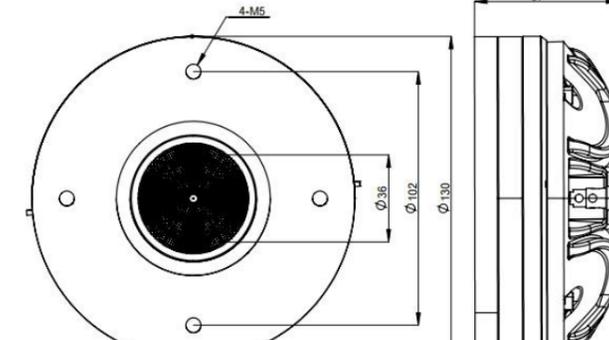



Key features:

- VERY LOW RESONANT FREQUENCY
- COPPER CAP DEMODULATION RING, POWERFUL MOTOR STRUCTURE
- DESIGNED FOR LARGE SPEAKER SYSTEMS WHERE HIGH SPL IS REQUIRED

Design notes:

The 200FCD compression driver is a very high performance high frequency device ideal for large professional loudspeaker systems. The driver uses all components that were designed and manufacture with one objective in mind - be the best. The driver,Äôs phase plug is CNC machined from solid aluminum with unbeaten level of precision. The dome is carefully attached to the voice coil

with our sandwich joint, improving the transfer of the high frequencies and further improving power handling and reliability of the driver.
Diaphragm Assembly
The driver features a 75mm pure titanium diaphragm. Suspension is formed from Polyimide material. The acoustic output exits through an aluminum, radial 3 slot phase plug and a 2.0 inch throat aperture. Nominal

sensitivity is 108.5 dB 1watt / 1 meter.

Specifications:

General specs	
Nominal Diameter:	3"
Rated Impedance:	8 ohm
Power handling	
AES Power:	110 watts
Program Power:	220 watts
Peak Power:	440 watts
Voice Coil	
Diameter:	3 in.
Winding wire:	CCAR
Former:	kapton

T/S Parameters	
Resonant frequency:	500 Hz
Nominal sensitivity	109 dB
Re:	5.5 ohm
Le:	n/a mH


Design details	
Dome Material:	Titanium
Surround material:	Polymer
Magnet material:	Ferrite
Overall diameter:	180 mm
Bolt circle diameter:	102 mm
Throat diameter:	48mm mm
Number of mounting holes:	4
Depth (front to rear):	91.5 mm
Net weight:	5kg

Ordering codes:	
	200FCDX-049


Recone kits:	
	RC200FCDX-049

In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

Frequency response & Impedance

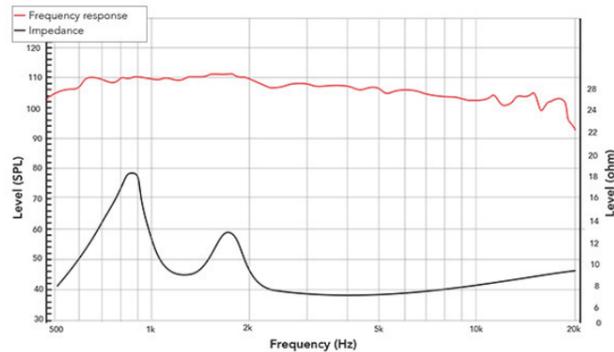

2D drawing

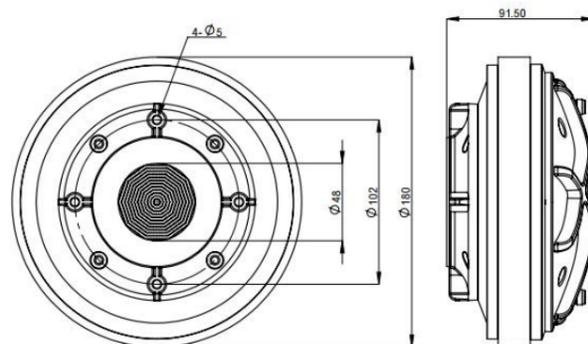

Frequency response measured on IAC baffle

CONTACT DETAILS:

Rm. 501, Bld. D, Xinlong Xinzhi Valley,
209 Center Jinlu
Dalang Town
523785 Dongguan
China

email: info@redcatt.net
tel.: +86 0769-83181898