

**8"****CX8F140**

# Coaxial Ferrite-Neodymium Driver



## Key features:

- LF AND HF INTEGRATED FER-RITE-NEODYMIUM MAGNETIC CIRCUIT
- ALUMINUM SYMMETRICAL HORN
- GOOD OFF-AXES FREQUEN-CY RESPONSE

## Design notes:

The CX8F-140F is a high efficien-cy, (95dB 1watt / 1 meter) 8-inch coaxial speaker with very linear frequency response characteristics and high power handling capa-bility. The mid-woofer utilizes REDCATT developed paper pulp cone that has proven its performance in many ours successful designs. The HF section was designed around our most successful dome assembly as used in 140FCD and has integrated sym-metrical aluminum horn. The combination

of used materials with our state of the art quality production yields in well performing driver even in the most demanding and extreme weather conditions.

Magnetic circuit design REDCATT engineers have developed ferrite-neodymium based magnetic circuit, capable of delivering the highest level of performance in a small form factor. The combination of ferrite and neodymium de-

livers an excellent magnetic performance. The magnetic circuit design is optimized to generate the minimum amount of flux modulation, providing exceptional stability. Aluminum demodulation ring is assembled in the HF section.

## Specifications:

### General specs (LF/HF)

Nominal Diameter: 8"

Rated Impedance: 8 ohm

### Power handling (LF/HF)

AES Power: 150/30 watts

Program Power: 300/60 watts

Peak Power: 600/120 watts

### Voice Coil (LF/HF)

Diameter: 2/1.4 in.

Winding wire: CCAW

Former: Glass Fiber/

Winding height: 12/2.5 mm

### T/S Parameters (LF/HF)

Resonant frequency: 86/1000 Hz

Re: 5.6/5.5

Qes: 0.63

Qms: 9.06

Qts: 0.59

Vas: 10.7 liters

Sd: 213.8 cm<sup>2</sup>

Sensitivity: 92.44/103

Mms: 20.2 grams

Bl: 9.93

Le: 0.47 mH

### Design details (LF/HF)

Surround Material: Fabric/Poly-

Cone/ dome material: Paper/Polymer

Spider: Nomex/n/a

Plate thickness: 8 mm

Peak to peak linear cone displacement: 5.7 mm

Overall diameter: 207 mm

Bolt circle diameter: 197.2 mm

Baffle cutout dia.: 178 mm

Number of mounting holes: 8

Depth (flange to rear): 107.5 mm

Net weight: 2.8KG


### Ordering codes:

CX8F140X-374B

### Recone kits:

In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

## Frequency response & Impedance

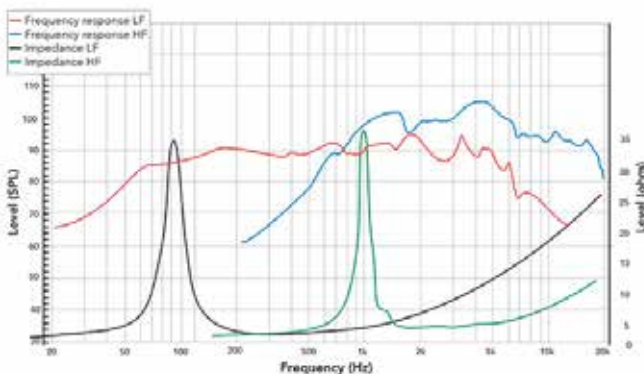

Frequency response measured on IAC baffle

## 2D drawing

