

8"**8NPM**

Neodymium Mid-Woofer



Key features:

- HI SENSITIVITY
- HI POWER HANDLING
- DESIGNED FOR APPLICATIONS WHERE ARE SIZABLE AMOUNTS OF MID-FREQUENCIES REQUIRED

Design notes:

The 8NPM is a high efficiency, (97dB 1watt / 1 meter) 8-inch mid-woofer with extended mid frequency response and high power handling capability. The 8NPM uses a lightweight half pressed paper cone along with a double roll fabric surround. Spider is made of Nomex material with optimized shape for well controlled piston motion. The used high quality components ensure long lasting performance even in high powered applications. The chosen

material combination provides remarkable strength, high efficiency and sustained output under extreme conditions.

Power Handling
The voice coil featuring Kapton former material capable of withstanding peak temperatures in excess of 280C, well beyond the thermal requirements of modern audio systems. Former strength provides the ideal transfer of power between the voice

coil and the cone assembly and assists in reducing distortion artifacts. By combining this material with state of the art adhesives and our winding voice coil technology, the 8NPM delivers incredibly high performance.

Specifications:

General specs

Nominal Diameter: 8"
Rated Impedance: 8 ohm

Power handling

AES Power: 200 watts
Program Power: 400 watts
Peak Power: 800 watts

Voice Coil

Diameter: 2 in.
Winding wire: CCAW
Former: Kapton
Winding height: 15.4 mm

T/S Parameters

Resonant frequency: 79 Hz
Re: 5.4 ohm
Qes: 0.31
Qms: 3.85
Qts: 0.29
Vas: 10.9 liters
Sd: 213.8 cm²
Sensitivity: 96.06 dB
Mms: 23.9 grams
Bl: 14.2
Le: 0.6 mH

Design details

Surround Material: Fabric
Cone material: Paper
Spider: Nomex
Plate thickness: 8 mm
Peak to peak linear cone displacement: 5.1 mm
Overall diameter: 209.5 mm
Bolt circle diameter: 197.5 mm
Baffle cutout dia.: 185 mm
Number of mounting holes: 8
Depth (flange to rear): 87.3 mm
Net weight: 1.8kg


Ordering codes:

8NPMX8-157

Recone kits:

In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

Frequency response & Impedance

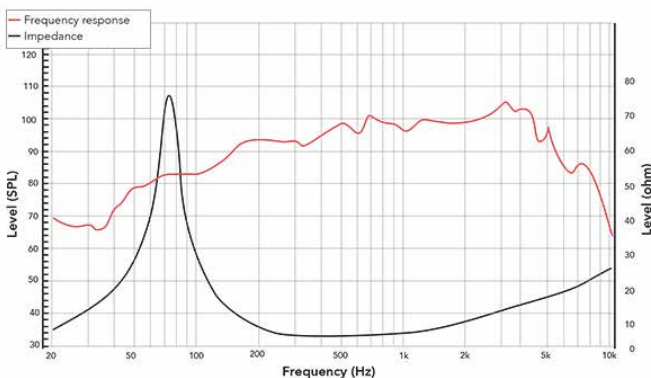

Frequency response measured on IAC baffle

2D drawing

