

8"**8FR**

Ferrite Full-Range



Key features:

- LIGHTWEIGHT, YET STRONG PAPER CONE REINFORCED BY BAMBOO FIBERS
- WORKING RANGE UP TO 15KHZ
- AESTHETICS TUNED FOR MODER HI-FI LOOK

Design notes:

8FR was developed for Hi-Fi applications where single point audio source is required. Our engineers designed the cone to be lightweight, yet strong, using our new paper pulp reinforced by bamboo fibers. The driver sports wizard cone that extends the working range up to 15kHz, paired with bullet style phase plug. Combination of these two key features ensures smooth frequency response and an optimal sound reproduction on and off axes.

Magnetic circuit was design to deliver robust B field across the whole range of working frequencies. Additional copper shorting cup further improves the driver behavior in mid-high working region.

The aesthetics of this driver were tuned to support modern hi-fi system designs, where the driver can be exposed to the end user. Distinctive colors ensures the driver can be featured as part of the overall industrial design.

Specifications:

General specs

Nominal Diameter: 8"
Rated Impedance: 4 ohm

Power handling

AES Power: 30 watts
Program Power: 60 watts
Peak Power: 120 watts

Voice Coil

Diameter: 1.6 in.
Winding wire: Aluminum
Former: kapton
Winding height: 17.6 mm

T/S Parameters

Resonant frequency: 53 Hz
Re: 3.8 ohm
Qes: 0.396
Qms: 8.473
Qts: 0.378
Vas:
Sd:
Sensitivity:
Mms: 18.38 grams
Bl: 7.86
Le: 0.08 mH

Design details

Surround Material: Fabric
Cone material: Paper
Spider: Nomex
Plate thickness: 6 mm
Peak to peak linear cone displacement: 4.9 mm
Overall diameter: 210 mm
Bolt circle diameter: 195.5 mm
Baffle cutout dia.: 186.88 mm
Number of mounting holes: 8
Depth (flange to rear): 91.8 mm
Net weight: 2.55kg


Ordering codes:

8FRX4-551A

Recone kits:

In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

Frequency response & Impedance

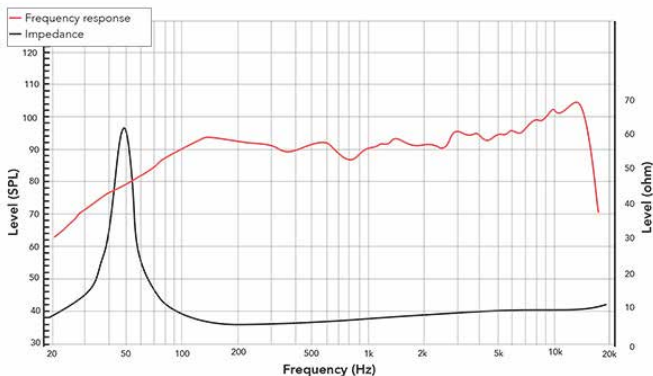

Frequency response measured on IAC baffle

2D drawing

